


PRELIMINARY INVESTIGATION
OF
TRACE CONTAMINANTS
IN
PULP AND PAPER
MILL EFFLUENTS

July, 1986



Ontario

Ministry
of the
Environment

The Honourable
Jim Bradley
Minister

Rod McLeod
Deputy Minister

Copyright Provisions and Restrictions on Copying:

This Ontario Ministry of the Environment work is protected by Crown copyright (unless otherwise indicated), which is held by the Queen's Printer for Ontario. It may be reproduced for non-commercial purposes if credit is given and Crown copyright is acknowledged.

It may not be reproduced, in all or in part, part, for any commercial purpose except under a licence from the Queen's Printer for Ontario.

For information on reproducing Government of Ontario works, please contact Service Ontario Publications at copyright@ontario.ca

PRELIMINARY INVESTIGATION OF
TRACE CONTAMINANTS IN PULP AND
PAPER MILL EFFLUENTS

MPC61

Prepared by:
Christina Cherwinsky
Great Lakes Section
Water Resources Branch
Ontario Ministry of the Environment

and

Don Murray
Industrial Abatement Section
Northwestern Region
Ontario Ministry of the Environment

July, 1986

FOREWORD

The data presented in this report largely result from a joint program, undertaken in 1982 by the Great Lakes Section, Water Resources Branch and the Industrial Abatement Section, Northwestern Region, in an attempt to investigate pulp and paper mill effluents with respect to trace contaminants. The results presented have to be considered as preliminary, since most are based on single grab samples and cannot be assumed to be representative of these effluents. This was a first attempt at this type of study on pulp and paper mill effluents and the results will provide information upon which further studies can be based.

Additional data, collected in 1983, as part of the Ministry's Lake Superior intensive year investigations of Nipigon Bay, under the Great Lakes Surveillance Plan of the International Joint Commission, and as part of a joint assessment by the Northwestern Region and the Toxicity Unit, Water Resources Branch of the acute effects of mill effluent on caged fish in Jackfish Bay (Flood et al. 1986), are also presented in this report.

Since 1982 and 1983, significant changes have taken place at many of the mills investigated which would affect effluent quality and the type of constituents that might be present in these mill effluents.

The Ministry has recently issued a White Paper to secure public input on a Municipal-Industrial Strategy for Abatement for Ontario, that places emphasis on the control of toxic substances. The information obtained through this study will be useful in formulating further monitoring requirements and additional control measures for pulp and paper mill effluents.

ACKNOWLEDGEMENTS

We thank Dr. Glenys Foster (former employee) and Dr. Otto Meresz, Senior Scientific Adviser, of the Laboratory Services Branch for their help and advice in the difficult task of sorting and editing the lists of trace contaminant compounds.

We also thank Gerald Masters, a summer student, from the Industrial Abatement Section, Northwestern Region, for collecting a great many of the effluent samples.

Finally, we thank Mr. Claude Lochan, Ms. Katharine Simpson and especially Mr. Doug Kennedy for their co-operation and assistance in compiling and editing the data.

This study was funded in part by Environment Canada under the terms of the Canada-Ontario Agreement on Great Lakes Water Quality.

TABLE OF CONTENTS

	<u>PAGE</u>
FOREWORD	(i)
ACKNOWLEDGEMENTS	(ii)
TABLE OF CONTENTS	(iii)
LIST OF TABLES AND FIGURES	(iv)
SUMMARY	(v)
INTRODUCTION	1
DESCRIPTION OF MILLS	2
METHODS	2
1. Sample Collection.....	2
2. Sample Analysis	2
RESULTS	3
1. Physical, Chemical and Biological Characterization ...	3
2. Bacterial Densities	4
3. Inorganic Trace Contaminants	5
4. Fatty, Aromatic and Resin Acids	6
5. Speciated Phenolics and Chlorophenols	7
6. Volatile Organohalides	9
7. Polychlorinated Biphenyls and Organochlorine Pesticides.....	10
8. Trace Contaminants Identified in Pulp and Paper Mill Effluents in Ontario	10
CONCLUSIONS AND DISCUSSION	11
RECOMMENDATIONS	14
REFERENCES	42
APPENDIX A - SAMPLE COLLECTION	46
APPENDIX B - CHARACTERIZATION OF PULP AND PAPER MILL EFFLUENTS IN ONTARIO	51
APPENDIX C - LIST OF TRACE CONTAMINANTS OF CONCERN	132
APPENDIX D - ABBREVIATIONS AND SYMBOLS	134

LIST OF TABLES AND FIGURES

		<u>PAGE</u>
Table 1	Description of Mills (1982)	15
Table 2	List of Parameters	16
Table 3	Summary of Inorganic Trace Contaminants in Final Mill Effluents	17
Table 4	Summary of Resin and Fatty Acids in Final Mill Effluents	18
Table 5	Comparison of Trace Contaminant Compounds Identified in Some of the Pulp and Paper Mill Effluents Examined in Ontario with Published Lists of Trace Contaminants of Concern	19
Table 6	Compounds Detected in Some of the Pulp and Paper Mill Effluents Examined in Ontario which were Identified by Chemical Formula Only	31
Table 7	Classification and Possible Sources of Trace Contaminants Found in Some of the Pulp and Paper Mill Effluents Examined in Ontario	32
Figure 1	Concentration of Guaiacol and Phenol in Final Mill Effluents	38
Figure 2	Concentration of Chlorophenols in Final Mill Effluents	39
Figure 3	Concentration of Chloroform in Final Mill Effluents	40

SUMMARY

Pulp and paper mill process streams from a number of mills located in Northwestern Ontario were sampled in order to establish a preliminary inventory of effluent constituents.

Samples were analyzed for both conventional (e.g. solids, conductivity, turbidity) and non-conventional (e.g. chlorophenols, trace metals, pesticides) parameters using a number of analytical techniques. Physical, chemical and biological characterization included the examination of: bacterial densities; acute fish lethality; inorganic trace contaminants; fatty, aromatic and resin acids; speciated phenolics and chlorophenols; volatile organohalides; PCB's; organochlorine pesticides and additional trace contaminants.

The results of this study revealed high levels of conventional pollutants in mill effluents, when compared with mill intake water. In addition, hazardous organic and inorganic trace contaminants with the potential for causing fish tainting, taste and odour problems in drinking water supplies, and toxicity to aquatic organisms were identified as constituents of some of the mill effluents examined. Chemicals, potentially mutagenic and/or carcinogenic, were also found.

A number of sampling and analytical problems were encountered during the course of this study which contributed to the high degree of variability of results observed between and within mills. These included: small sample sizes; a lack of mill operating information; and the absence of established sampling and analytical protocols.

As a preliminary step in effluent characterization, this study has provided a lengthy list of chemicals and concentrations determined to be present in some of the pulp and paper mill effluents. In order to determine short-term variations and long term trends, and obtain a better understanding of the overall input of these chemicals to surface waters, a more comprehensive survey is needed. This would include continuous monitoring for longer periods of time to encompass all phases of mill operation during typical and atypical conditions and the use of consistent established sampling and analytical protocols.

INTRODUCTION

Pulp and paper mill process wastes are known sources of conventional and non-conventional water pollutants. Various organic and inorganic trace contaminants capable of causing fish tainting, taste and odour problems, lethality and/or bioaccumulation in fish and other biota have previously been identified as constituents of mill effluents.

In 1982, a study was undertaken by the Great Lakes Section, Water Resources Branch, and the Industrial Abatement Section, Northwestern Region, as a preliminary step in characterizing effluents from selected Ontario pulp and paper mills. The purpose of the survey was to initiate compilation of an inventory of effluent constituents and to establish a data base, for the Ministry's Lake Superior intensive year investigations which were planned for 1983, under the Great Lakes International Surveillance Plan (International Joint Commission (IJC) Water Quality Board). An inventory of this type had not been undertaken previously in Ontario and no established sampling or analytical protocols were available.

The information provided in this inventory will also be essential to Ministry of the Environment staff addressing environmental impact, abatement, regulation and control of pulp and paper mill waste discharges.

DESCRIPTION OF MILLS

A total of nine mills located in Northwestern Ontario, of which seven discharge either directly or indirectly into Lake Superior, were examined. The mills, their location, the types of processes employed and the average daily production and effluent data for 1982 are presented in Table 1.

METHODS

1. Sample Collection

Single grab or composite samples of final mill effluents, individual process streams or mill intake water were collected from each mill as outlined in Appendix A. In the case of Domtar Packaging, Red Rock, sampling for final mill effluent also included treated effluent from the Red Rock Water Pollution Control Plant (WPCP). It was not possible to sample the mill effluent alone, as it is discharged as three separate streams into a collection canal, one above the WPCP discharge, and two below.

2. Sample Analysis

Mill samples were analyzed for a variety of parameters which are listed in Table 2. The analyses were carried out by Ministry of the Environment (MOE) laboratories in Thunder Bay or Toronto as described in the Handbook of Analytical Methods for Environmental Samples (MOE 1983). Aerated, static, 96-hour bioassays with rainbow trout, to determine the acute lethality of the effluents were conducted by the Toxicity Unit of the Water Resources Branch (Craig *et al.* 1983).

Gas chromatographic/mass spectrometric analyses were also conducted on a selected number of samples from each mill by the Mass Spectrometry Unit of the MOE and the Analytical Services Division, of the Environmental Protection Service, Environment Canada. Compounds were identified on the basis of computer matches with the NIH/EPA Library. The designation of isomers, where indicated, has not been confirmed.

RESULTS

The results of the 1982 sampling program, along with some additional 1983 effluent data for Domtar and Kimberly-Clark, the latter of which formed part of a joint 1983 Northwestern Region and Toxicity Unit in-situ fish study, are summarized in Tables 1-72 (Appendix B).

In the absence of established effluent standards or guidelines for many organic and inorganic trace contaminants, the concentrations of these compounds detected in the mill effluents examined were compared with objectives, guidelines and/or criteria for surface water quality. This was done in order to put the concentration values detected in mill effluents into perspective and lend some appreciation to the values observed. However, these receiving water objectives should not be used directly to assess effluent quality.

A brief discussion of the key findings provided by this program are presented below:

1. Physical, Chemical and Biological Characterization

Samples for physical, chemical and biological parameters were taken from various final mill effluents, mill intake water and individual waste process streams (Tables 1-9, Appendix B). These samples revealed considerably elevated levels of most of the parameters examined in mill effluents when compared with mill intake water. The ratio of final mill effluent concentration to intake water concentration was a maximum of 10,000 for reactive phenolics, 5,000 for BOD, 490 for COD, 300 for tannins, 250 for sodium, 140 for DOC, 80 for suspended solids and 50 for colour.

As expected, due to the semi-continuous nature of the mill processes and the complexity of the raw materials, a high degree of variability was found between effluents of different mills and to a lesser extent between effluents of the same mill. For example, concentrations of reactive phenolics in final mill effluents ranged from <1.0 ug/L at the Abitibi Price Fine Papers mill to 3400 ug/L at Kimberly-Clark and BOD levels ranged from 55 mg/L at the Abitibi Price Fine Papers mill to 540 mg/L at Abitibi Price Thunder Bay and Kimberly-Clark. Similarly, reactive phenolics ranged from 120 ug/L in a James River final effluent sample collected in June to 2600 ug/L in the same effluent stream sampled in August. However, the level of BOD and suspended solids in the same two samples decreased from 280 to 240 mg/L and 230 to 30 mg/L, respectively.

The current Provincial Water Quality Objective (PWQO) for the protection of aquatic life and recreational water uses, for reactive phenolics (as measured by the 4-aminoantipyrine colorimetric test) is 1 ug/L (MOE, 1978). Thus, the final effluent with the highest concentration of phenolics would have to be diluted by 1:3400 (i.e. 1 part effluent to 3400 parts receiving water), in order to meet the PWQO in the receiving water. The actual dilution for the Kimberly-Clark effluent in Jackfish Bay has been estimated to be 1:20 at about 6km from the point of discharge.

2. Bacterial Densities

High densities of bacteria were encountered at all of the mills examined, with the exception of James River Marathon Ltd. In decreasing order of abundance, the types of bacteria identified were heterotrophs, total coliforms, sulphate reducers, fecal coliforms or fecal streptococci, and Escherichia coli (E. coli) or Pseudomonas aeruginosa strains. The levels of bacteria in final mill effluents ranged from <10 E. coli or Pseudomonas aeruginosa organisms/100 ml to 6×10^7 heterotrophic bacteria/1 ml. The results are presented in Tables 10 - 18, Appendix B. These levels are typical of those found in pulp and paper mills throughout North America.

3. Inorganic Trace Contaminants

Low levels of heavy metals and other inorganic substances were found in all of the effluents (Tables 19 - 27, Appendix B).

Concentrations of copper, iron, zinc and hydrogen sulphide in final mill effluents were higher than the Provincial Water Quality Objectives (PWQO) for the protection of aquatic life (MOE 1978) in almost all of the final mill effluents examined (Table 3, page 17); whereas, arsenic was below the Provincial Objective in all cases. Cyanide levels were similarly low and in all but one final effluent sample were below the corresponding receiving water objective. All ten final effluent samples with detectable amounts of cadmium had concentrations greater than the MOE Objective; and three samples contained chromium and/or nickel above the PWQO's.

Based on estimated dilution ratios, which were calculated, where possible, for effluents containing the highest concentration of compound, mixing of the effluents with the receiving water would be sufficient to bring the concentrations of copper, zinc and cyanide to below Provincial Objectives (Table 3, page 17). However, dilution alone, would not be enough to reduce the highest levels of cadmium, iron and hydrogen sulphide to meet PWQO's.

All of these inorganic trace contaminants, with the exception of iron and hydrogen sulphide, are included in the United States Environmental Protection Agency's (USEPA) Toxic Pollutant List (Keith and Telliard 1979) and the MOE List of Chemicals for Further Evaluation (MOE 1982). In addition, USEPA has established best available technology economically achievable (BAT) effluent limitation guidelines for the pulp, paper and paperboard industry which control the discharge of zinc, along with two other toxic pollutants, namely, trichlorophenol and pentachlorophenol, into the aquatic environment (USEPA, 1982). Further research is required to determine the environmental implications of the observed concentrations of the various inorganic trace contaminants in natural systems.

4. Fatty, Aromatic and Resin Acids

Analyses of mill effluents and intake water for fatty, aromatic and resin acids revealed high levels in almost all effluents examined (Tables 28-36, Appendix B). Concentrations of fatty acids in final mill effluents ranged from ND to 4800 ug/L of linoleic acid; aromatic acids ranged from ND to 300 ug/L of benzoic acid; and resin acids from ND to 23,239 ug/L of neoabietic acid.

A high degree of variability was observed between final effluents from the same mills collected on different dates. Fatty, aromatic or resin acids were not detected in final effluents collected at Abitibi Price, Thunder Bay Division, on July 21, 1982, or at Kimberly-Clark in August 1982. Yet all other final effluent samples collected at these mills contained quantities of acids in concentrations upwards of 8066 ug/L.

Some of the final mill effluents examined, contained pimaric, sandaracopimaric, isopimaric and abietic resin acids, at concentrations well above those reported to be lethal to 50% of test fish (LC_{50}) in 96 hours (Table 4, page 18). In particular, abietic acid, at concentrations up to 14 times greater, was detected above the 96 hours LC_{50} dose for rainbow trout in 10 out of 25 final effluents tested. However, oleic, linoleic and dehydroabietic acids were always detected below reported lethal concentrations.

Resin and fatty acids are considered to be the principle substances responsible for toxicity to aquatic organisms from pulp and paper effluents. Some of these compounds have also been listed in the literature as "suspected" carcinogens (oleic acid) or "possible" carcinogens (abietic, dehydroabietic, isopimaric, pimaric, sandaracopimaric, linoleic, and linolenic acids) (B.C. Research 1979). Neoabietic acid has been identified as a mutagen (Douglas

and Nestmann 1980) and abietic acid has been nominated to the National Cancer Institute's Chemical Selection Working Group as a candidate for carcinogenesis bioassay (Sigman et al. 1984). As with inorganic trace contaminants, further research is required to define the environmental implications of the resin, aromatic and fatty acids detected in these samples.

5. Speciated Phenolics and Chlorophenols

Certain phenols and phenolic compounds can cause fish tainting and taste and odour problems in public water supplies; can be highly toxic; and can bioaccumulate in aquatic organisms. In addition, phenol and chlorinated phenols have been included in a list of suspected carcinogens identified in pulp and paper mill effluents (B.C. Research 1979).

Screening of mill effluents and mill intake water for specific phenolic compounds resulted in the detection and identification of phenol, vanillin, homovanillic acid, guaiacol, acetovanillon, vanillic acid and acetosyringone in mill effluents (Tables 37-45, Appendix B). Additional analyses of effluents for chlorophenols revealed the presence of tri-, tetra- and pentachlorophenols (Tables 46-54, Appendix B). Analyses of mill intake water revealed only 2,4,6-trichlorophenols in two mill intake samples out of 22 examined. No other phenolic compounds were detected in any of the mill intake waters analyzed.

Guaiacol, ranging from ND to 1250 ug/L was detected at concentrations capable of causing fish tainting (>100 ug/L) in 58% of final mill effluents examined (Shumway and Palensky, 1973). Phenol (ND to 17,000 ug/L) was detected at 3 out of 9 mills tested. One mill had detectable levels of phenol (50 - 2600 ug/L) in 75% of its final mill effluents.

All values of phenol found in final mill effluents were below the highest concentration not impairing the flavour of fish (5600 ug/L) (Shumway and Palensky 1973). Figure 1 highlights guaiacol and phenol concentrations detected in selected samples of final mill effluents from every mill examined.

The concentrations of trichlorophenols (TCP's) in final mill effluents ranged from ND to 16,200 ng/L for 2,4,6-TCP which was below the lowest acute toxicity reported for bluegill fish (320,000 ng/L) and the MOE surface water criterion (18,000 ng/L) for total trichlorophenols (McKee et al. 1984). Tetrachlorophenols (TTCP's) in final mill effluents ranged from ND to 1600 ng/L for the 2,3,5,6 isomer, which was also below the lowest reported acute toxicity of 170,000 ng/L for bluegill fish (McKee et al. 1984). However, two out of eight final effluents with detectable amounts of either TTCP isomer, had values at or above the MOE surface water criterion of 1000 ng/L for total tetrachlorophenols (McKee et al. 1984).

Fifty-nine percent of final mill effluents analyzed for pentachlorophenols (PCP's) had detectable levels ranging from 100 to 2250 ng/L PCP. Seven final mill effluent samples had concentrations greater than the MOE criterion of 500 ng/L PCP for surface water (McKee et al. 1984) and the recommended Great Lakes Water Quality Agreement (GLWQA) objective of 400 ng/L (IJC, 1980).

Dilutions of 1:6 and 1:4.5 of the effluents with the receiving water would be required to bring the highest concentrations of tetrachlorophenols and pentachlorophenols, respectively to within PWQO. The actual dilution for the Kimberly-Clark effluents containing the highest levels of these compounds has been estimated to be 1:20 at 6 km from the point of discharge.

It should be noted that samples collected before 1984 were occasionally contaminated with pentachlorophenol from damaged bottle caps. This contamination, where present, was generally in the range of 50 to 300 ng/L. Tri- and tetrachlorophenol levels were not affected by this potential source of contamination.

No PCP was detected in any of the 22 mill intake samples collected in this study. Fourteen of 21 mill effluent samples with detectable PCP levels also had detectable levels of tri- and/or tetrachlorophenols and 11 of the effluent samples contained concentrations of PCP greater than 300 ng/L.

These results lead us to conclude that, while there is some potential for contamination in these samples, there is equally strong evidence that PCP was present in the effluents examined. As a result, all PCP values as originally reported by the laboratory have been included in this report.

Effluent limitation guidelines and standards, promulgated by EPA in 1982 for the pulp, paper and paperboard industry, included trichlorophenol and pentachlorophenol on the list of toxic pollutants (USEPA 1982). Figure 2 illustrates concentrations of chlorophenols detected by electron capture gas chromatography in selected samples of final mill effluents from each mill. Again, further research is necessary to define the environmental implication of the observed concentrations.

6. Volatile Organohalides

Mill effluents were tested for volatile organohalides (Appendix B, Tables 55-63). The results show that chloroform (ND - 4036 ug/L) was detected in final mill effluents at 7 out of 9 mills examined (Figure 3). In addition tetrachloroethylene (10 ug/L) and dichlorobromomethane (9 ug/L) were each identified once in final mill effluents.

The Great Lakes Water Quality Agreement identified chloroform as a hazardous polluting substance (IJC 1978). It appears on the USEPA Priority Organic Pollutants List and on the MOE List of Chemicals for Further Evaluation. Chloroform is also a confirmed animal carcinogen (B.C. Research 1979, DHHS 1981) and suspect of carcinogenic potential for man (ACGIH 1984).

7. Polychlorinated Biphenyls (PCB's) and Organochlorine Pesticides

Results of analyses for PCB's and organochlorine pesticides showed that PCB's, in final mill effluents (ND to 2210 ng/L) were detected at 3 of the 9 mills studied and that only one mill intake water sample contained PCB's (30 ng/L). All of the samples with detectable levels of PCB's exceeded the MOE aquatic objective of 1 ng/L. A greater than 1:2000 fold dilution of the effluent, containing the highest concentration of PCB's, would be required in order that the PWQO for PCB's could be met in the receiving water. The actual dilution for this effluent has been estimated to be 1:20 at the diffuser outfall.

Six organochlorine pesticides, out of 21 screened, ranging from ND to 28 ng/L, were detected in mill effluents and/or intake water. These were: α -, β - and γ - BHC; γ -chlordane; dieldrin; and pp-DDE. The results are presented in Appendix B, Tables 64-75. The sources of the PCB's and organochlorine pesticides isolated in mill effluents and mill intake water are unknown, although these compounds have been detected throughout the Great Lakes basin.

8. Trace Contaminants Identified in Pulp and Paper Mill Effluents in Ontario

All organic and inorganic trace contaminants detected and identified in final mill effluents and individual waste process streams, from the nine mills investigated in this program are presented in Table 5. This list is comprised of those compounds which could be fully identified (i.e. on the basis of chemical class and chemical formula) by GC/MS or other routine analytical methods. Those contaminants whose chemical class could not be determined but to which chemical formula could be assigned, are shown in Table 6. Additional compounds were detected by GC/MS; however, identification was not possible.

The trace contaminants identified in this program were compared with published lists of trace contaminants of concern and lists of compounds identified at other pulp and paper mills. As shown in Table 5 (page 19), the majority of compounds could be found on at least one of the published lists and many appeared on all six. Eighteen compounds, including benzene, chloroform, mercury, PCB, penta- chlorophenol, phenol, 2,4,6-trichlorophenol and toluene, appeared on the USEPA Priority Pollutants List, the MOE List of Chemicals for Further Evaluation, and in Appendix #1 (Hazardous Polluting Substances) or Appendix #2 (Potential Hazardous Polluting Substances) of the Great Lakes Water Quality Agreement.

In Table 7 (page 31) the organic and inorganic trace contaminants, identified in the pulp and paper mill effluents investigated in this program have been arranged into groups, based on their classification or suspected origin.

CONCLUSIONS AND DISCUSSION

The program described in this report was set up in order to establish an inventory of pulp and paper mill effluent constituents to aid surveillance and monitoring activities in mill-impacted areas along the Great Lakes and in the Northwestern Region of Ontario. The information provided in this inventory will also be of use to Ministry staff and others, especially those addressing environmental assessment, establishing regulations and control orders for the pulp and paper mills, setting Ministry policy and developing objectives and guidelines.

The study characterized a number of pulp and paper mill effluents at nine mills located in Northwestern Ontario. Results revealed high levels of many parameters relative to intake waters. These include bacteria and conventional pollutants such as BOD, total solids and sodium at most of the mills investigated. Also identified in mill effluents were organic and inorganic trace contaminants capable of causing: fish tainting and taste and odour problems in municipal water supplies (e.g. phenol, quaiacol); toxicity to aquatic organisms (e.g. heavy metals, resin acids, fatty acids,

chlorophenols); mutagenicity (e.g. neoabietic acid); and confirmed, suspected or possible carcinogenicity (e.g. benzene, chloroform, α -terpineol, abietic acid, linoleic acid, PCB, phenol and chlorinated phenols). Possible sources of these contaminants are naturally occurring wood chemicals, lignin degradation (natural or process-related), chlorination and sulphite processes, industrial solvents and additives, or solvents associated with pesticides commonly detected in the Great Lakes basin.

Many of the trace contaminants identified in this study, also appear on a preliminary, short list of pulp and paper effluent constituents (Table 1, Appendix C) which was prepared after this study was completed. This list highlights some of the trace contaminants of special concern that should be included in any pulp and paper effluent monitoring program. All of the compounds listed, were screened for in this study with the exception of 2,3,7,8-tetrachlorodibenzodioxin (TCDD), other polychlorinated dibenzodioxins (PCDD) and polychlorinated dibenzofurans (PCDF). These latter compounds were added to the list only recently, as a result of occasional detections of 2,3,7,8-TCDD in fish caught downstream of pulp and paper mills (Allan Johnson, MOE, personal communication). However, a program to investigate the presence and source(s) of 2,3,7,8-TCDD and related compounds, namely other PCDD's and PCDF's in Ontario pulp and paper mills and the surrounding aquatic ecosystems is currently underway. The results of this program should determine whether it is necessary to include these compounds in any long-term monitoring programs in the future.

In the absence of specific effluent guidelines or standards, the levels of some of the trace contaminants identified in mill effluents were compared to available Provincial ambient water quality objectives in order to determine the significance of the trace contaminant data. Most of the contaminants analyzed were generally found at very low concentrations requiring zero or minimal dilutions to achieve ambient water quality objectives. However, dilution alone would probably not have been enough to reduce the highest levels of cadmium, iron, hydrogen sulphide, or PCB's, encountered in some of the final mill effluents investigated, to meet PWQO.

A considerable amount of variability of concentration and chemical composition was observed between effluents of different mills and effluents of the same mill. This could be due to differences in mill type (pulp and/or paper); state of mill operation (normal or abnormal); production (maximum or other); pulping processes employed (kraft, sulphite or mechanical); type of furnish used (hard or softwood, or re-cycled paper); type and performance of pollution abatement measures practised (clarifiers and/or lagoons); type and timing of sample and sampling procedure (grab or composite); or analytical methods employed (see Table 1, for example).

Sampling and analytical methodologies varied throughout the study period. These variations resulted from a lack of available established protocols. Sampling procedures were amended and more reliable analytical methods were adopted during the course of the program.

It must be emphasized that the sampling program described herein was not intended to be a comprehensive inventory of all mill effluent constituents under all operating conditions. Nevertheless, the results presented are quantitative and they identify those effluent constituents and types of contaminants that can be found in pulp and paper mills. However, the information presented in this report is not sufficient to derive estimates of the frequency with which the various compounds occur in mill effluents or to identify trends. This will only be possible when all Ontario mills have been sampled, as frequently as possible, under a wide range of operating conditions.

RECOMMENDATIONS

It is recommended that:

1. The effluent characterization program, described in this report, be extended to include the monitoring of all Ontario pulp and paper mills; that sampling be carried out under typical and worst case operating conditions; that the list of parameters include those used and discussed in this study; that consistent and quantitative analytical and sampling protocols be used throughout; and that the mills disclose all pertinent mill operating information necessary for interpretation of monitoring results.
2. Additional and more quantitative analytical methodologies be developed for analyses of trace contaminants of concern in pulp and paper mill effluents.
3. Further research be conducted on the environmental significance of the concentrations of hazardous trace contaminants identified in the pulp and paper mill effluents investigated and that special emphasis be placed on the fate and potential effect of these compounds on the aquatic ecosystem.
4. Government and the industry investigate available and develop new technologies to minimize or eliminate the discharge of hazardous contaminants from pulp and paper mill effluents to the aquatic environment.
5. Based on the results of this and future studies, the Ministry of Environment develop regulations for monitoring, control and compliance of the pulp and paper industry (especially with respect to hazardous contaminants), similar to the ones currently being drafted for the St. Clair River area.

TABLE 1: Description of Mills (1982)*

MILL	LOCATION	RECEIVING WATER/ BASIN/WATERSHED	PROCESSES	SALEABLE PRODUCTS	TOTAL PRODUCTION	BOD	TSS	EFFLUENT FLOWS
					(Megagrams/day)			(1000 cubic meters/day)
Abitibi Price Fine Papers, Port Arthur Division** (APFP)	Thunder Bay	Thunder Bay/ Lake Superior	Pulping: mechanical (stone groundwood) Papermaking Coatings (clay, starch)	Fine and coated papers	275	3.2	1.5	47.9
Abitibi Price Inc., Fort William Division (APFW)	Thunder Bay	Thunder Bay/ Lake Superior	Pulping: mechanical (semichemical & stone groundwood) Papermaking	Newsprint	320	10.2	1.2	22.6
Abitibi Price Inc., Thunder Bay Division (APTB)	Thunder Bay	Thunder Bay/ Lake Superior	Pulping: sulphite, mechanical (stone groundwood) Papermaking	Newsprint	414	19.8	1.0	29.9
Boise Cascade Canada Limited (BOISE)	Fort Frances	Rainy River/Lake of-the-Woods/ Arctic	Pulping: Kraft (bleached and unbleached) mechanical (stone groundwood)	Kraft pulp Groundwood specialties	1,049	12.2	7.8	72.2
Domtar Packaging/ Kraft Paper and Board Division Red Rock Mill (DOMTAR)	Red Rock	Nipigon Bay/ Lake Superior	Pulping: Kraft (semi-bleached) mechanical (groundwood) Papermaking	Kraft linerboard Newsprint	594	7.2	4.8	91
Great Lakes Forest Products Ltd. (GLFP)	Dryden	Wabigoon River/ English River/ Arctic	Pulping: Kraft (bleached & unbleached) Papermaking	Kraft pulp Kraft specialty papers	573	14.2	5.3	113.9
Great Lakes Forest Products Ltd. (GLFPTB)	Thunder Bay	Kaministiquia R./ Lake Superior	Pulping: Kraft (bleached & semi-bleached) sulphite, mechanical (stone groundwood)	Kraft pulp Sulphite pulp Newsprint	1,964	81.9	12.3	248
James River Marathon Limited (JR) (formerly: American Can Canada Inc.)	Marathon	Lake Superior	Pulping: Kraft (bleached)	Kraft pulp	393	17.1	9.7	81.7
Kimberly-Clark of Canada Limited (KC)	Terrace Bay	Blackbird Creek/ Jackfish Bay/ Lake Superior	Pulping: Kraft (bleached)	Kraft pulp	785	32	6.58	122.6

* Information obtained from: i) "Ministry Pulp and Paper Status Report, Ontario Pulp and Paper Industry" - prepared by the Northwestern, Northeastern, West Central and Southeastern Regions and the Water Resources Branch (unpublished).
and ii) "Pulp and Paper Effluents in Ontario: The Toxicity Problem and Abatement Approaches" - C. Inniss, W.P. Suboch and O. Muller, Quality Protection Section, Water Resources Branch (unpublished).

**Name has been changed to: Provincial Papers, Division of Abitibi Price Inc.

TABLE 2: List of Parameters

Conductivity
pH
Chemical Oxygen Demand (COD)
Total Suspended Solids (TSS)
Total Dissolved Solids (TDS)
Total Solids (TS)
Biochemical Oxygen Demand (BOD₅)
Ammonia
Colour
Turbidity
Total Phosphorus (TP)
Total Kjeldahl Nitrogen (TKN)
Sodium (Na)
Chloride (Cl)
Sulphate
Dissolved Organic Carbon (DOC)
Reactive Phenolics
Tannins
Bacteria
Inorganic Trace Contaminants
Resin, Aromatic and Fatty Acids
Speciated Phenolics
Chlorophenols
Volatile Organohalides
PCB's and Organochlorine Pesticides
GC/MS
Acute Lethality (LC₅₀)

TABLE 3: Summary of Inorganic Trace Contaminants in Final Mill Effluents

PARAMETER (UNITS)	N	CONCENTRATION RANGE	PWQO	N ABOVE PWQO	HIGHEST DILUTION REQUIRED TO MEET PWQO	ESTIMATED* DILUTION
Arsenic (mg/L)	18	<0.001 - 0.006	0.1	0	--	--
Cadmium (mg/L)	23	<0.0002 - 0.005	0.0002	10	1:25	a) 1:20, b) 1:9
Chromium (mg/L)	23	<0.02 - 0.21	0.1	2	1:2	--
Copper (mg/L)	23	<0.01 - 0.03	0.005	18	1:6	b) 1:9, c) 1:1000
Iron (mg/L)	21	0.33 - 4.3	0.3	21	1:14	b) 1:9
Nickel (mg/L)	18	<0.2 - 0.05	0.025	2	1:2	--
Zinc (mg/L)	23	<0.01 - 0.18	0.03	19	1:6	d) 1:7
Hydrogen Sulphide (mg/L)	24	<0.02 - 2.00	0.002	20	1:1000	b) 1:9
Cyanide (mg/L)	19	<0.001 - 0.045	0.005	1	1:9	e) 1:20

N = Number of samples

PWQO = Provincial Water Quality Objective

* = Calculated on the basis of conductivity, a conservative parameter

-- = Not available

a) = KC - at about 6km from point of discharge to Jackfish Bay

b) = APFW = at 150m from the breakwall outlet

c) = GLFPTB = at 9.5 km from point of discharge to Kaministiquia River

d) = APFP - at 600m from point of discharge to Thunder Bay Inner Harbour

e) = JR - at diffuser

TABLE 4: Summary of Resin and Fatty Acids in Final Mill Effluents

COMPOUND	N	CONCENTRATION RANGE (ug/L)	N ABOVE DETECTION	LC ₅₀ * (ug/L)	N ABOVE LC ₅₀
<u>Fatty Acids:</u>					
Oleic	25	ND - 1,244	15	24,000	0
Linoleic	25	ND - 4,801	14	9,000	0
<u>Resin Acids:</u>					
Pimaric	25	ND - 1,795	19	800	1
Sandaracopimaric	25	ND - 3,183	19	900	2
Isopimaric	25	ND - 5,224	20	700	4
Abietic	25	ND - 15,810	22	1,100	10
Dehydroabietic	25	ND - 1,187	19	1,600	0

N = Number of samples

* = Concentration lethal to 50% of rainbow trout, (Tomlinson, 1980)

ND = Not detected

TABLE 5:

Comparison of Trace Contaminant Compounds Identified in some of the Pulp and Paper Mill Effluents Examined in Ontario with Published Lists of Trace Contaminants of Concern

COMPOUNDS IDENTIFIED	(a)	(b)	(c)	(d)	(e)	(f)
	USEPA	MOE	GLWQA #1 #2	P & P	CPAR	FOX RIVER
Abietic acid ✓		X		X	X	X
Acetone					X	
Acetophenone ✓						
✓ Acetosyringone		X			X	
✓ Acetovanillon		X			X	
Aldrin	X		X	X		X
✓ Alicyclic hydrocarbons						
✓ Aliphatic acids		X				
✓ Aliphatic alcohols						
✓ Aliphatic aldehydes						
✓ Aliphatic amide						
✓ Aliphatic diols						
✓ Aliphatic ethers						
✓ Aliphatic hydrocarbons						
✓ Aliphatic ketones						
✓ Aliphatic nitrile						
✓ Alkyl benzenes						
✓ Alkyl naphthalenes						
Aluminum						
✓ Arachidic acid		X			X	
Arsenic	X	X		X		X
Benzaldehyde					X	
✓ Benzaldehyde derivative		X				
Benzene	X	X	X	X	X	X
✓ Benzenemethanol						
✓ Benzenepropanoic acid						
✓ Benzenepropanol						
Benzenethanol						
Benzoic acid		X	X			
α-BHC	X	X		X		
β-BHC	X	X		X		
✓ γ-BHC	X	X	X	X		
✓ Bicyclo(3,3,1)nonane						

TABLE 5: Cont'd

COMPOUNDS IDENTIFIED	USEPA	MOE	GLWQA #1 #2	P & P	CPAR	FOX RIVER
✓Bicyclo(3,3,1)nonanol						
✓Bicyclo(4,1,0)heptan-2-one						
✓Bicyclo(5,1,0)octane						
✓1,4-Bis(ethoxymethyl)cyclohexane						
✓Bis(2-ethylhexyl)phthalate	X	X		X		X
✓Borneol (+ isomer)					X	
Butanal						
Butanol*					X	
✓n-Butanol						
✓t-Butanol						
✓2-Butoxyethanol						
✓2-t-Butyl-3-cresol		X				
Cadmium	X	X	X	X		X
Camphene (+ isomers)					X	
✓Capric acid		X			X	
Camphor (+ isomer)						
Carbon disulphide		X	X			
Carbontetrachloride	X	X		X	X	X
γ-Chlordane	X		X	X		X
Chloro-alkyne						
(2-Chloro-2-butenyl)-benzene						
4-Chloro-2-methylpyrimidine						
4-Chloro-3-methylphenol		X				
Chlorodibromomethane	X	X		X		
Chloroform	X	X	X	X	X	X
Chromium	X	X	X			X
Cobalt						
Copper	X	X	X	X		X
o-Cresol		X	X		X	
Cyanide	X	X		X		X
Cyclohexanol derivative						
Cyclohexene carboxylic acid						
Cyclohexenol derivative						
Cyclohexenyl-ethanone						

TABLE 5: Cont'd

COMPOUNDS IDENTIFIED	USEPA	MOE	GLWQA #1 #2	P & P	CPAR	FOX RIVER
pp-DDE	X			X		X
Decahydro-1,1,7-trimethyl-4-methylene-1H-cycloprop- (e)azulene						
Decahydro-5(hydroxy-3-methyl-3-pentenyl)-dimethyl- methylene-1-naphthalenemethanol						
Decahydro-methyl-1-methylene-propenyl-naphthalene 2-(Decahydro-trimethyl-2-methylene-1-naphthalenyl) methyl-2,5-cyclohexadiene-1,4-dione						
Decahydrotetramethylnaphtho-(2,1-B)-furan-2(1H)-one						
Decahydrotrimethyl-4-methylene-1H-cycloprop(e)azulene						
Decahydrotrimethyl-9-methylene-1,4-methanoazulene						
Dehydroabiatic acid		(X)		X	X	X
Di-n-butylphthalate	X	X	X	X		X
Dibenzothiophene						
Dichloroacetone						
Dichlorobromomethane	X	X		X		
Dichloroguaiacol		X			X	
Dichloromethoxybenzaldehyde		X				
Dichloromethoxyphenol		X			X	
Dichlorophenol	X1	X				
Dieldrin	X		X	X		X
Diethylphthalate	X	(X)		X	X	X
Dihydromethyl-indene						
Dihydronaphthalenes						
Dihydropentyl-furanone						
Dihydro-phenanthrylamine						
2,3-Dihydro-2-(4-hydroxy-3-methoxyphenyl)-5-3-hydroxy- 1-propenyl-7-methoxy-benzofuran-methanol?		X				
Dihydro-3,4-bis-(4-hydroxy-3-methoxyphenyl) methyl- 2(3H)furanone?		X				
9,10-Dihydro-3-nitro-2-phenanthrylamine						
4-(2,3-Dihydro-7-methoxy-3-methyl-5-(1-propenyl)- 2-benzofuranyl)-2-methoxyphenol		X				

TABLE 5: Cont'd

COMPOUNDS IDENTIFIED	USEPA	MOE	GLWQA #1 #2	P & P	CPAR	FOX RIVER
3A/7A-Dihydro-7A-methyl-5(4H)-indanone						
N-(9-10-Dihydro-2-phenanthryl) acetamide						
3,4-Dihydroxy-3-methoxypropiophenone		X				
Dimethoxyphenol		X				
Dimethoxypropanol						
1,2-Dimethoxy-4(2-propenyl)-benzene						
Dimethoxybenzoic acid						
(2,2-Dimethoxyethyl) benzene						
Dimethoxypropyl benzenes						
6,6-Dimethyl-bicyclo(3,1,1)hept-2-ene-2-methanol						
Dimethyl disulphide					X	
1-(1,1-Dimethylethoxy)-6-methylcyclohexene						
(Dimethylethyl) formamide						
Dimethylhexadiene (+ isomers)						
Dimethylnaphthalene						
Dimethylphenol	X1	X				
Dimethylstyrene (+ isomers)						
Dimethylsulphide					X	
Dimethyltetrasulphide						
Dimethyltrisulphide						
2,7-Dimethyl-3(2H)-benzofuranone						
1-(1,4 Dimethyl-3-cyclohexenyl) ethanone						
4-(1,5-Dimethyl-3-oxohexyl)-1-cyclohexene carboxylic acid-methyl ester						
4-Dimethylaminobenzaldehyde						
Dimethylphthalate	X	X		X		
8,13-Epoxy-labd-14-ene						
Ester (from natural waxes)						
Ethanol					X	
α -Ethenyl-decahydro-tetramethyl-methylene- 1-naphthalene propanol?						

TABLE 5: Cont'd

COMPOUNDS IDENTIFIED	USEPA	MOE	GLWQA #1 #2	P & P	CPAR	FOX RIVER
1-Ethenyl-1-methyl-2,4-bis-isopropenyl-cyclohexane						
α-Ethenyl-decahydro-2-hydroxy-pentamethyl- 1-naphthalene-propanol (+ isomer)						
7-Ethenyl-dodecahydro-tetramethyl-phenanthrene						
5-Ethenyl-tetrahydro-2-furanmethanol						
5-Ethenyl-trimethylfuranmethanol						
3-Ethenyl-dodecahydro-pentamethyl-1H-naphtho(2,1-B) pyran						
Ethoxybenzaldehyde	X	X	X		X	X
Ethylbenzene		X				
Ethylbenzenediol						
3-Ethyl-dodecahydro-pentamethyl-naphtho-pyran-one						
3-Ethyl-dodecahydro-pentamethyl-8H-naphtho(1,2-B) pyran-8-one						
Ethyl ester?						
Ethylphenol		X				
p-Ethylresorcinol		X				
Eugenol		X			X	
Fluoranthene	X	X		X		X
Furanylethanone						
1(2-Furanyl)ethanone		X	X		X	
Furfural		X			X	
Guaiacol (+ isomers)		X				
Hexachlorobenzene	X	X		X		
Hexachlorocyclopentadiene	X	X		X		
Hexahydro-tetramethyl-methano-naphthalene						
Hexanal						
Hexane						
Hexanol*						
Hexathiepane						
Homovanillic acid		X			X	
Hydrogen sulphide			X			
Hydroxybenzaldehyde		X			X1	

TABLE 5: Cont'd

COMPOUNDS IDENTIFIED	USEPA	MOE	GLWQA #1 #2	P & P	CPAR	FOX RIVER
Hydroxybenzeneacetic acid		X				
Hydroxycyclohexanemethanol						
Hydroxycyclohexanone						
Hydroxymethoxybenzaldehydes		X				
Hydroxymethoxyethanone						
Hydroxyphenylbutanone		X				
1-(4-Hydroxy-3-methoxyphenyl)-2-propanone derivative						
4-Hydroxy-3-methyl-2-(2-propenyl)-2-cyclopenten-1-one						
Hydroxybenzothiazole						
Iron						
Isoborneol (+ isomer)						
Isobutanal						
Isomaltol?						
3-Isopentyl-dihydro-2,5-furandione						
Isophorone	X	X		X		X
Isopimaric acid		X		X	X	X
Isopropanol						
p-Isopropylbenzaldehyde						
4-Isopropylcyclohexanol						
2-Isopropylcyclohexanol						
2-Isopropyl-3-cresol		X				
7-Isopropylidene-bicyclo(4,1,0)heptane						
Lauric acid		X				
Lead	X	X		X		X
Levopimaric acid		X				
Limonene					X	
Linoleic acid		X		X	X	X
Linolenic acid		X		X	X	X
Manganese						
Mercury	X	X	X	X		X
Methoxypropenylphenol		X				
3-Methoxy-2-cyclopenten-1-one						
1-Methoxy-4-propenyl-benzene						
2-Methoxy-4-propyl-phenol		X				

TABLE 5: Cont'd

COMPOUNDS IDENTIFIED	USEPA	MOE	GLWQA #1 #2	P & P	CPAR	FOX RIVER
2-Methoxybenzenepropanol derivative						
2-Methoxypyridine						
Methyl acetate						
Methylbenzylalcohol						
Methylbutanal*						
Methylcyclopentanone						
Methylcyclopentenone						
Methyl-trimethylbenzoate						
Methyl-3-(phenylmethyl)benzoate						
Methyl esters*						
Methylethylbenzoic acid						
Methyl-ethyl ketone						
N-Methylformamide						
Methylfuran*					X1	
Methylindene						
Methyl-isobutyl ketone						
Methyl-isopropyl ketone						
Methylphenols		X				
Methylpyrrole*						
Methylthiophene*						
Methyl-(propenyl)-cyclohexanol						
3-Methyl-1,2-cyclopentanediol						
4-Methyl-1-isopropyl-3-cyclohexen-1-ol						
2-Methyl-1-methylene-3-propenyl-cyclopentane						
4-Methyl-1-propyl-3-cyclohexen-1-ol						
13-Methyl-13-vinyl-podocarp-7-en-3-one						
5-Methyl-2-(isopropenyl)-cyclohexanol (+ derivatives)						
6-Methyl-2-methylene-6(4-methyl-3-pentenyl)bicyclo- (3,3,1)heptane						
1-Methyl-4-(5-methyl-1-methylene-4-hexenyl)-cyclohexene						
1-Methyl-4-isopropenyl-cyclohexene						
2-Methyl-4-isopropenyl-2-cyclohexenone						
1-Methyl-4-isopropyl-cyclohexene						
1-Methyl-4-propyl-cyclohexene						

TABLE 5: Cont'd

COMPOUNDS IDENTIFIED	USEPA	MOE	GLWQA #1 #2	P & P	CPAR	FOX RIVER
2-Methyl-5-isopropenyl-2-cyclohexen-1-ol acetate						
2-Methyl-5-isopropyl-bicyclo(3,1,0)hexan-2-ol						
5-Methyl-5-phenyl-2-hexanone						
2-Methyl-5-propyl-1,3-cyclohexadiene						
2-Methyl-cyclopentane-1,3-dione						
Methyl-isopropenyl-benzene						
Methyl-isopropenyl-cyclohexanol						
Methylenechloride	X	X		X		
4-Methylene-1-isopropyl-bicyclo(3,1,0)hexan-3-ol						
4-Methylene-1-isopropyl-bicyclo(3,1,0)hexane						
Molybdenum						
Myristic acid		X			X	
Naphthalene	X	X	X	X		X
Naphthalene-methanol derivatives						
Naphthalene-one derivative						
Naphthalenepropanol derivative						
Naphthofuran-one derivative						
Neoabietic acid		X			X	
Nickel	X	X		X		X
4-Nitrophenol	X	X	X	X		X
N-Nitrosodiphenylamine	X	X		X		
Octahydro-methyl-2(1H)-naphthalenone						
Octahydro-hydroxy-trimethylnaphthalenone acetate						
Octahydro-tetramethyl-naphthalenemethanol						
Octahydrodimethyl-isopropyl-naphthalenol						
Octahydronaphthalenone derivative						
Octahydro-tetramethylmethanoazulene						
Oleic acid		X		X	X	X
Palmitic acid		X			X	X
Pentachloroacetone						
Pentachlorophenol	X	X	X	X	X	X
Pentanone*						
Pentene (+ isomer)		X				
Phthalic acid						
Phenanthrene carboxyaldehydes						

TABLE 5: Cont'd

COMPOUNDS IDENTIFIED	USEPA	MOE	GLWQA #1 #2	P & P	CPAR	FOX RIVER
Phenol (+ unidentified phenol derivatives)	X	X	X	X	X	X
Phenylbenzamine		X				
n-Phenylbenzamine						
Phenylbutanone						
Phenyl-ethanediol						
Phenylpropanol						
Phenylpropanone						
3-Phenyl-2-propenal						
4-Phenyl-3-buten-2-one						
2-(Phenylmethylene)-cyclohexanone						
Pimaric acid		(X)		X	X	X
α-Pinene					X	
Polychlorinated biphenyls (PCB's)	X	X	X	X		X
Polypropyleneglycol derivatives						
Propanol*					X	
n-Propanol						
Propenylphenol		X				
Propiovanillon		X				
7-Propylidene-bicyclo(4,1,0)heptane		X				
Resacetophenone + isomer		X				
Resin alcohol						
Resin aldehyde						
Salicylic acid		X				
Sandaracopimaric acid		X			X	
Silicone compound						
Stearic acid					X	X
Steroids		X				
Stigmastadieneone						
Stigmastadienol						
Stigmastenol						
Stigmastenone						
Styrene		(X)	X			
Sulphur						
Syringaldehyde		X				

TABLE 5: Cont'd

COMPOUNDS IDENTIFIED	USEPA	MOE	GLWQA #1 #2	P & P	CPAR	FOX RIVER
Terpin hydrate					X	
α-Terpineol (+ isomers)						
Tetrachloroacetone						
Tetrachloroethylene	X	(X)		X		X
Tetrachloroguaiacol		X		X	X	X
2,3,4,5-Tetrachlorophenol		(X)			X	
2,3,5,6-Tetrachlorophenol		X			X	
Tetrahydro-hydroxy-dimethylbenzofuranone derivative						
Tetrahydro-hydroxy-dimethyl-isobenzofuranone						
Tetrahydro-isopropyl-pentamethylnaphthalene						
Tetrahydro-methyl-naphthalene						
Tetrahydrofuran						
Tetrahydrohexamethyl-s-indacene-1,7-dione						
Tetrahydrohydroxy-4(4-hydroxy-3-methoxy-phenyl) 7-methoxy-naphthofuran-1(3H)one						
Thiapentane						
Thiazolopyrimidine					X	
Thiophene						
Thiophenecarboxyaldehyde						
Toluene	X	X	X	X	X	X
Tributylphosphate						
1,1,1-Trichloroethane	X	(X)		X	X	X
Trichloroethylene	X	(X)		X		X
Trichloroguaiacol		X		X1	X	X1
2,3,4-Trichlorophenol		(X)	X		X	
2,4,5-Trichlorophenol		X	X		X	X
2,4,6-Trichlorophenol	X	X	X	X	X	X
Trimethoxybenzene						
(1,2,2-Trimethoxyethyl)-benzene						
1,3,3-Trimethyl-bicyclo(2,2,1)heptan-2-ol						
3,7,7-Trimethyl-bicyclo(4,1,0)heptane						
1,3,3-Trimethyl-bicyclo(3,1,1)heptan-2-one						
1,7,7-Trimethyl-bicyclo(2,2,1)heptan-2-one?						
2,6,6-Trimethyl-bicyclo(3,1,1)heptan-3-one						

TABLE 5: Cont'd

COMPOUNDS IDENTIFIED	USEPA	MOE	GLWQA #1 #2	P & P	CPAR	FOX RIVER
3,7,7-Trimethyl-bicyclo(4,1,0)hept-2-ene						
Trimethylcyclopentanone						
Trimethylcyclopentenone						
Trimethylphenol		X				
Trimethylquinolines						
1,3,3-Trimethyl-2-oxabicyclo(2,2,2)octane						
4,11,11-Trimethyl-8-methylene-bicyclo(7,2,0)undec-4-ene						
Triterpanes						
1,2,4-Trithiolane						
Vanillic acid		X			X	
Vanillin		X				
Veratrole						
m-Xylene		X	X	X		X
o- or p-Xylene		X	X	X		X
Zinc	X	X		X		X

- a) - United States Environmental Protection Agency (USEPA); (Keith and Telliard 1979).
b) - Ontario Ministry of the Environment (MOE); (MOE 1982).
c) - Great Lakes Water Quality Agreement (GLWQA); (IJC 1978).
d) - (USEPA 1981).
e) - Committee on Pollution Abatement Research (CPAR) - List of compounds compiled specifically for this program, which were identified in pulp and paper mill process streams and published in a number of CPAR Project Reports.
f) - (Sullivan and Delfino 1982).
BHC - Hexachlorocyclohexane
* - Isomer unknown
? - Tentative identification
1 - Isomer specified

Table 6: Compounds Detected in Some of the Pulp and Paper Mill Effluents Examined in Ontario
which were Identified by Chemical Formula Only

C6 H12		C11 H14 O2	
C6 H14		C11 H16	(Tetrahydronaphthalenes)
C7 H4 O2 C14	(Phenol derivative)	C12 H16	
C7 H10 O2		C12 H16	(Tetrahydronaphthalenes)
C7 H16		C13 H18	(Tetrahydronaphthalenes)
C8 H8 O3		C15 H24	
C8 H18		C15 H24	(Naphthalene derivatives)
C9 H8 O		C15 H26 O	
C9 H8 O2			
C9 H10 O4		C18 H22	
C9 H12			
C9 H14		C20 H22 O6	
C10 H12 O2	(Phenol derivative)	C20 H28 O	
C10 H12 O3		C20 H28 O	(Phenanthrene carboxaldehyde)
C10 H14		C20 H30 O	
C10 H14 O		C20 H30 O2	
C10 H14 O2		C20 H32	
C10 H14 O2	(Phenol derivative)	C20 H34 O	(Naphthalene derivative)
C10 H16		C20 H34 O2	
C10 H16 O		C21 H30 O2	(Phenanthrene derivative)
C10 H18		C21 H32 O2	(Cyclohexane carboxylic acid derivative)
C10 H18 O			
C10 H20 O		C22 H42 O4	(Hexanedioic acid esters)
C10 H22 O3			
C10 H26 O			

TABLE 7: Classification and Possible Sources of Trace Contaminants
Found in Some of the Pulp and Paper Mill Effluents Examined in Ontario

1. Terpenes & Associated Compounds

Bicyclo(3,3,1)nonane
 Bicyclo(3,3,1)nonanol
 Bicyclo(4,1,0)heptan-2-one
 Bicyclo(5,1,0)octane
 1,4-Bis(ethoxymethyl)cyclohexane
 Borneol (+ isomer)
 Camphene (+ isomers)
 Camphor (+ isomer)
 Cyclohexanol derivative
 Cyclohexene carboxylic acid
 Cyclohexenol derivative
 Cyclohexenyl-ethanone
 Decahydro-1,1,7-trimethyl-4-methylene-1H-cycloprop-(e)azulene
 Decahydro-5(hydroxy-3-methyl-3-pentenyl)-dimethyl-methylene-1-naphthalenemethanol
 Decahydro-methyl-1-methylene-propenyl-naphthalene
 2-(Decahydro-trimethyl-2-methylene-1-naphthalenyl)methyl-2,5-cyclohexadiene-1,4-dione
 Decahydrotetramethylnaphtho-(2,1-B)-furan-2(1H)-one
 Decahydrotrimethyl-4-methylene-1H-cycloprop(e)azulene
 Decahydrotrimethyl-9-methylene-1,4-methanoazulene
 6,6-Dimethyl-bicyclo(3,1,1)hept-2-ene-2-methanol
 1-(1,1-Dimethylethoxy)-6-methylcyclohexene
 1-(1,4 Dimethyl-3-cyclohexenyl) ethanone
 4-(1,5-Dimethyl-3-oxohexyl)-1-cyclohexene carboxylic acid-methyl ester
 8,13-Epoxy-labd-14-ene
 α -Ethenyl-decahydro-2-hydroxy-pentamethyl-1-naphthalene-propanol (+ isomer)
 α -Ethenyl-decahydro-tetramethyl-methylene-1-naphthalene propanol?
 7-Ethenyl-dodecahydro-tetramethyl-phenanthrene
 1-Ethenyl-1-methyl-2,4-bis-isopropenyl-cyclohexane
 3-Ethenyl-dodecahydro-pentamethyl-1H-naphtho(2,1-B)pyran
 5-Ethenyl-trimethylfuranmethanol
 3-Ethyl-dodecahydro-pentamethyl-naphtho-pyran-one
 3-Ethyl-dodecahydro-pentamethyl-8H-naphtho(1,2-B)pyran-8-one
 Hexahydro-tetramethyl-methano-naphthalene

Table 7: (Cont'd)

1. Terpenes & Associated Compounds (cont'd)

Hydroxycyclohexanemethanol
 Hydroxycyclohexanone
 4-Hydroxy-3-methyl-2-(2-propenyl)-2-cyclopenten-1-one
 Isoborneol (+ isomer)
 4-Isopropylcyclohexanol
 2-Isopropylcyclohexanol
 7-Isopropylidene-bicyclo(4,1,0)heptane
 Limonene
 3-Methoxy-2-cyclopenten-1-one
 1-Methoxy-4-propenyl-benzene
 Methylcyclopentanone
 Methylcyclopentenone
 Methyl-(propenyl)-cyclohexanol
 4-Methyl-1-isopropyl-3-cyclohexen-1-ol
 2-Methyl-1-methylene-3-propenyl-cyclopentane
 4-Methyl-1-propyl-3-cyclohexen-1-ol
 13-Methyl-13-vinyl-podocarp-7-en-3-one
 5-Methyl-2-(isopropenyl)-cyclohexanol (+ derivatives)
 6-Methyl-2-methylene-6(4-methyl-3-pentenyl)bicyclo-(3,3,1)heptane
 1-Methyl-4-(5-methyl-1-methylene-4-hexenyl)-cyclohexene
 1-Methyl-4-isopropenyl-cyclohexene
 2-Methyl-4-isopropenyl-2-cyclohexenone
 1-Methyl-4-isopropyl-cyclohexene
 1-Methyl-4-propyl-cyclohexene
 2-Methyl-5-isopropenyl-2-cyclohexen-1-ol acetate
 2-Methyl-5-isopropyl-bicyclo(3,1,0)hexan-2-ol
 2-Methyl-5-propyl-1,3-cyclohexadiene
 2-Methyl-cyclopentane-1,3-dione
 Methyl-isopropenyl-benzene
 Methyl-isopropenyl-cyclohexanol
 4-Methylene-1-isopropyl-bicyclo(3,1,0)hexan-3-ol
 4-Methylene-1-isopropyl-bicyclo(3,1,0)hexane
 Naphthalene-methanol derivatives
 Naphthalene-one derivative
 Naphthalenepropanol derivative
 Naphthofuran-one derivative
 Octahydro-methyl-2(1H)-naphthalenone
 Octahydro-hydroxy-trimethylnaphthalenone acetate

Table 7: (Cont'd)

1. Terpenes & Associated Compounds (Cont'd)

Octahydro-tetramethyl-naphthalenemethanol
 Octahydrodimethyl-isopropyl-naphthalenol
 Octahydronaphthalenone derivative
 Octahydrotetramethylmethanoazulene
 α-Pinene
 7-Propylidene-bicyclo(4,1,0)heptane
 Terpin hydrate
 α-Terpineol (+ isomers)
 Tetrahydro-isopropyl-pentamethylnaphthalene
 1,3,3-Trimethyl-bicyclo(2,2,1)heptan-2-ol
 3,7,7-Trimethyl-bicyclo(4,1,0)heptane
 1,3,3-Trimethyl-bicyclo(3,1,1)heptan-2-one
 1,7,7-Trimethyl-bicyclo(2,2,1)heptan-2-one?
 2,6,6-Trimethyl-bicyclo(3,1,1)heptan-3-one
 3,7,7-Trimethyl-bicyclo(4,1,0)hept-2-ene
 Trimethylcyclopentanone
 Trimethylcyclopentenone
 1,3,3-Trimethyl-2-oxabicyclo(2,2,2)octane
 4,11,11-Trimethyl-8-methylene-bicyclo(7,2,0)undec-4-ene
 Triterpanes

2. Products of Chlorination

(2-Chloro-2-butenyl)-benzene
 4-Chloro-2-methylpyrimidine
 4-Chloro-3-methylphenol
 Chloro-alkyne
 Chlorodibromomethane
 Chloroform
 Dichloroacetone
 Dichlorobromomethane
 Dichloroguaiacol
 Dichloromethoxybenzaldehyde
 Dichloromethoxyphenol
 Dichlorophenol
 Hexachlorobenzene
 Hexachlorocyclopentadiene
 Pentachloroacetone
 Pentachlorophenol

2. Products of Chlorination (Cont'd)

Tetrachloroacetone
 Tetrachloroguaiacol
 2,3,4,5-Tetrachlorophenol
 2,3,5,6-Tetrachlorophenol
 Trichloroguaiacol
 2,3,4-Trichlorophenol
 2,4,5-Trichlorophenol
 2,4,6-Trichlorophenol

3. Industrial Solvents and Additives

Acetone
 Benzene
 Bis(2-ethylhexyl)phthalate
 Butanal
 Butanol*
 n-Butanol
 t-Butanol
 2-Butoxyethanol
 Carbontetrachloride
 Chloroform
 Di-n-butylphthalate
 Diethylphthalate
 (Dimethylethyl) formamide
 Ethanol
 Ethylbenzene
 Isophorone
 Isopropanol
 Methyl acetate
 Methyl-ethyl ketone
 N-Methylformamide
 Methyl-isobutyl ketone
 Methyl-isopropyl ketone
 Methylenechloride
 4-Nitrophenol
 N-Nitrosodiphenylamine
 Phenylbenzamine
 n-Phenylbenzamine

Table 7: (Cont'd)

3. Industrial Solvents and Additives (Cont'd)

Polypropyleneglycol derivatives
Propanol*
n-Propanol
Silicone compound
Tetrachloroethylene
Tetrahydrofuran
Toluene
Tributylphosphate
1,1,1-Trichloroethane
Trichloroethylene
m-Xylene
o- or p-Xylene

4. Lignin Degradation Products and Natural Products

Acetophenone
Acetosyringone
Acetovanillon
Alkyl benzenes
Benzaldehyde
Benzaldehyde derivative
Benzenemethanol
Benzenepropanoic acid
Benzenepropanol
Benzeneethanol
Benzoic acid
2-t-Butyl-3-cresol
o-Cresol
Dihdropentyl-furanone
2,3-Dihydro-2-(4-hydroxy-3-methoxyphenyl)-5-3-hydroxy-1-propenyl-7-methoxy-benzofuran-methanol?
Dihydro-3,4-bis-(4-hydroxy-3-methoxyphenyl) methyl-2(3H)furanone?
4-(2,3-Dihydro-7-methoxy-3-methyl-5-(1-propenyl)-2-benzofuranyl)-2-methoxyphenol
3,4-Dihydroxy-3-methoxypropiofenone
Dimethoxyphenol
Dimethoxypropanol
1,2-Dimethoxy-4(2-propenyl)-benzene
Dimethoxybenzoic acid

Table 7: (Cont'd)

4. Lignin Degradation Products and Natural Products (Cont'd)

(2,2-Dimethoxyethyl) benzene
 Dimethoxypropyl benzenes
 Dimethylphenol
 2,7-Dimethyl-3(2H)-benzofuranone
 5-Ethenyl-tetrahydro-2-furanmethanol
 Ethoxybenzaldehyde
 Ethylbenzenediol
 Ethylphenol
 p-Ethylresorcinol
 Eugenol
 Furanylethanone
 1(2-Furanyl)ethanone
 Furfural
 Guaiacol (+ isomers)
 Hexanal
 Homovanillic acid
 Hydroxygenzaldehyde
 Hydroxybenzeneacetic acid
 Hydroxymethoxybenzaldehydes
 Hydroxymethoxyethanone
 Hydroxyphenylbutanone
 1-(4-Hydroxy-3-methoxyphenyl)-2-propanone derivative
 Isobutanal
 Isomaltol?
 3-Isopentyl-dihydro-2,5-furandione
 p-Isopropylbenzaldehyde
 2-Isopropyl-3-cresol
 Methoxypropenylphenol
 2-Methoxy-4-propyl-phenol
 2-Methoxybenzenepropanol derivative
 Methylbenzylalcohol
 Methylbutanal*
 Methyl-trimethylbenzoate
 Methyl-3-(phenylmethyl)benzoate
 Methyl-ethylbenzoic acid
 Methylfuran*

Methylphenols
 3-Methyl-1,2-cyclopenthanediol
 5-Methyl-5-phenyl-2-hexanone
 Pentanone*
 Phthalic acid
 Phenol (+ unidentified phenol derivatives)
 Phenylbutanone
 Phenyl-ethanediol
 Phenylpropanol
 Phenylpropanone
 3-Phenyl-2-propenal
 4-Phenyl-3-buten-2-one
 2-(Phenylmethylene)-cyclohexanone
 Propenylphenol
 Propiovanillon
 Resacetophenone + isomer
 Salicylic acid
 Steroids
 Stigmastadieneone
 Stigmastadienol
 Stigmastenol
 Stigmastenone
 Syringaldehyde
 Tetrahydro-hydroxy-dimethylbenzofuranone derivative
 Tetrahydro-hydroxy-dimethyl-isobenzofuranone
 Tetrahydrohydroxy-4(4-hydroxy-3-methoxy-phenyl)7-methoxy-naphthofuran-1(3H)one
 Trimethoxybenzene
 (1,2,2-Trimethoxyethyl)-benzene
 Trimethylphenol
 Trimethylquinolines
 Vanillic acid
 Vanillin
 Veratrole

Table 7: (Cont'd)

5. Resin Acids and Associated Compounds

Abietic acid
Dehydroabietic acid
Isopimaric acid
Levopimaric acid
Neoabietic acid
Pimaric acid
Resin alcohol
Resin aldehyde
Sandaracopimaric acid

6. Fatty Acids

Aliphatic acids
Arachidic acid
Capric acid
Lauric acid
Linoleic acid
Linolenic acid
Myristic acid
Oleic acid
Palmitic acid
Stearic acid

7. Fatty Alcohols

Aliphatic alcohols
Aliphatic diols
Hexanol*

8. Hydrocarbons

Alicyclic hydrocarbons
Aliphatic hydrocarbons
Dimethylhexadiene (+ isomers)
Hexane
Pentene (+ isomer)

9. Pesticides

Aldrin
 α -BHC
 β -BHC
 γ -BHC
 γ -Chlordane
pp-DDE
Dieldrin
Hexachlorobenzene
Pentachlorophenol

10. Metals and Inorganics

Aluminum
Arsenic
Cadmium
Chromium
Cobalt
Copper
Cyanide
Iron
Lead
Manganese
Mercury
Molybdenum
Nickel
Zinc

11. Products of Sulphite Process and Sulphur Cycle Intermediates

Carbon disulphide
Dimethyl disulphide
Dimethylsulphide
Dimethyltetrasulphide
Dimethyltrisulphide
Hexathiepane
Hydrogen sulphide
Sulphur
Thiapentane
1,2,4-Trithiolane


Table 7: (Cont'd)

12. Miscellaneous Organic Compounds

Aliphatic aldehydes
 Aliphatic amide
 Aliphatic ethers
 Aliphatic ketones
 Aliphatic nitrile
 Alkyl naphthalenes
 Dibenzothiophene
 Dihydromethyl-indene
 Dihydronaphthalenes
 Dihydro-phenanthrylamine
 9,10-Dihydro-3-nitro-2-phenanthrylamine
 3A/7A-Dihydro-7A-methyl-5(4H)-indanone
 N-(9-10-Dihydro-2-phenanthryl) acetamide
 Dimethylnaphthalene
 Dimethylstyrene (+ isomers)
 4-Dimethylaminobenzaldehyde
 Dimethylphthalate
 Ester (from natural waxes)
 Ethyl ester?
 Fluoranthene
 Hydroxybenzothiazole
 2-Methoxypyridine
 Methyl esters*
 Methylindene
 Methylpyrrole*

Methylthiophene*
 Naphthalene
 Pnenanthrene carboxyaldehydes
 Polychlorinated biphenyls (PCB's)
 Styrene
 Tetrahydro-methyl-naphthalene
 Tetrahydrohexamethyl-s-indacene-1,7-dione
 Thiazolopyrimidine
 Thiophene
 Thiophenecarboxyaldehyde

* - Isomer unknown
 ? - Tentative identification of compound
 BHC - Hexachlorocyclohexane

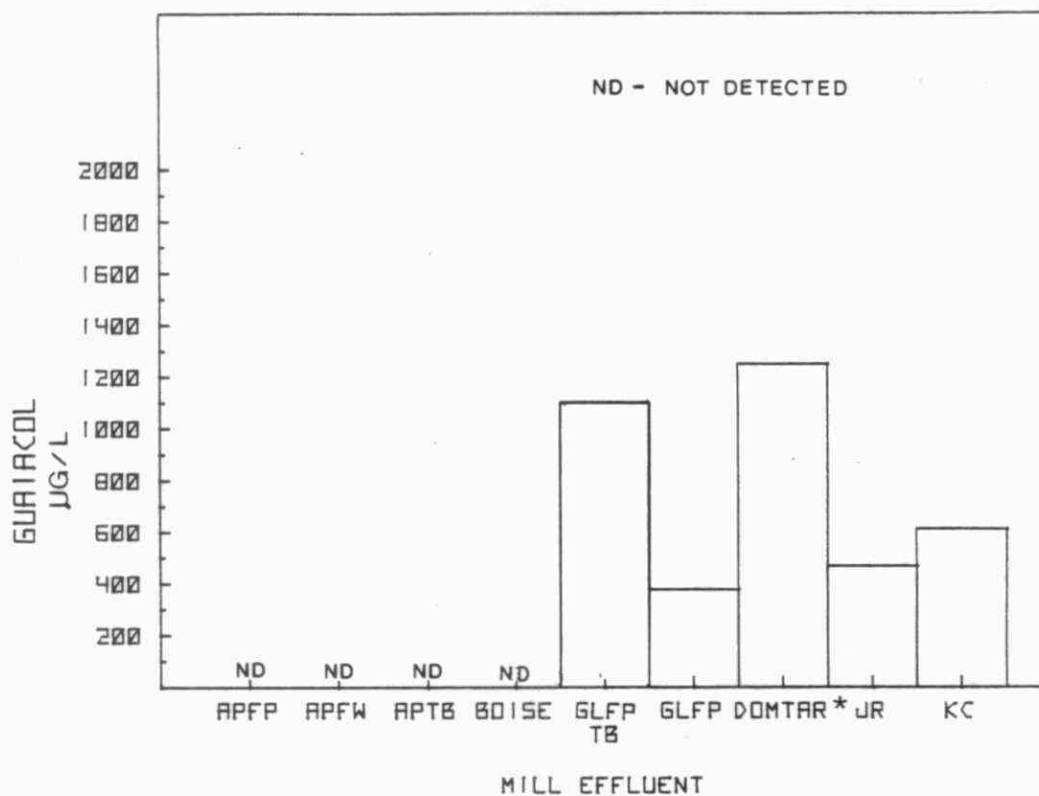

* NOTE: Mill effluent samples from Domtar Packaging also contained effluent from the Red Rock Water Pollution Control Plant

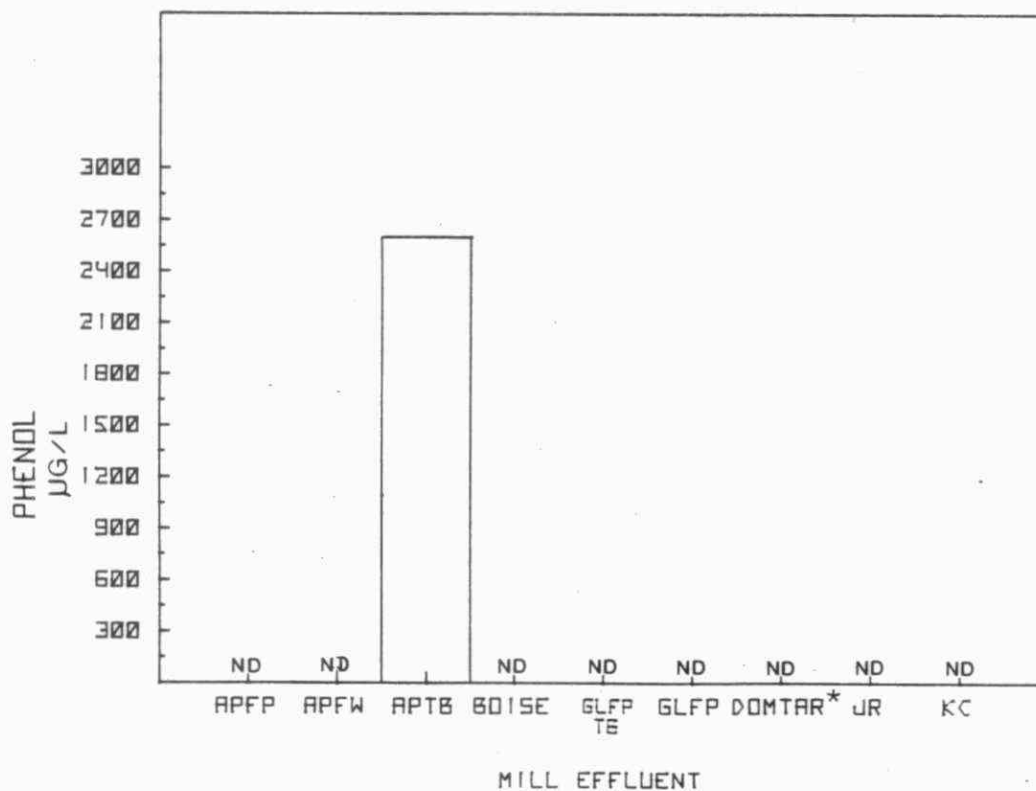


Figure 1 - Concentration of Guaiacol & Phenol in Final Mill Effluents

* NOTE: Mill effluent samples from Domtar Packaging also contained effluent from the Red Rock Water Pollution Control Plant

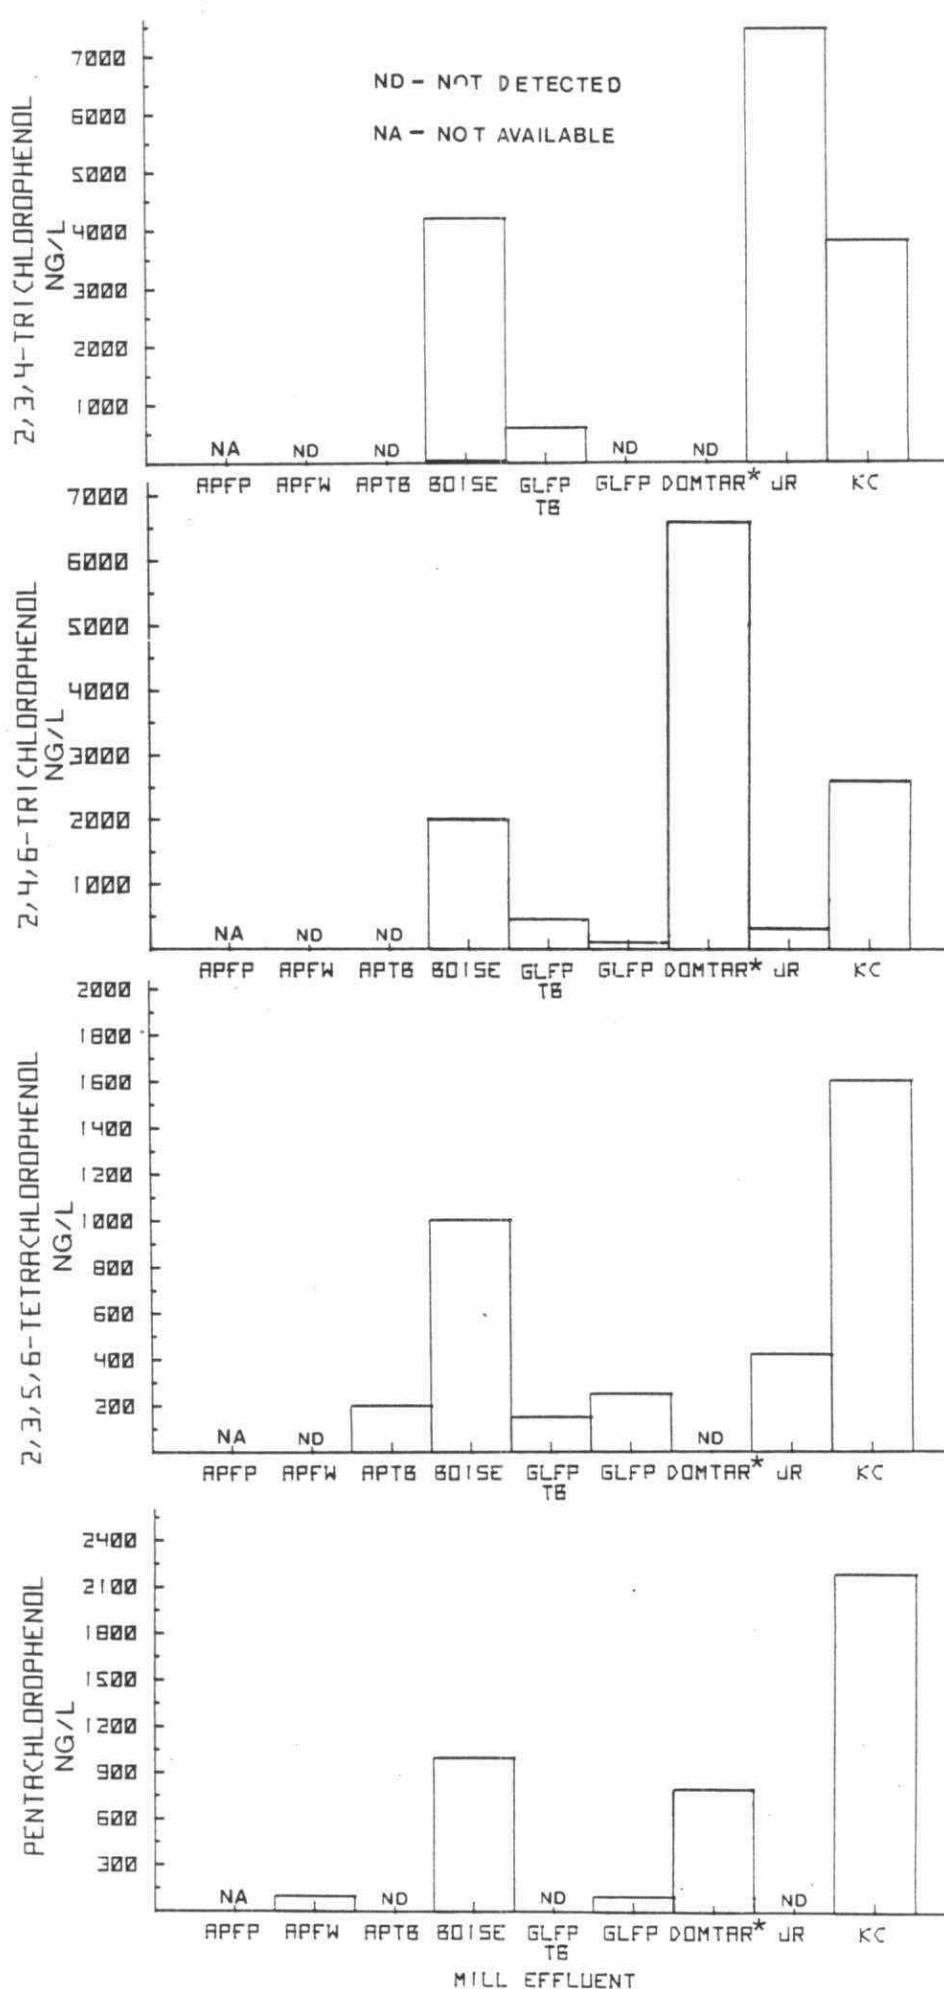


Figure 2 - Concentration of Chlorophenols in Final Mill Effluents

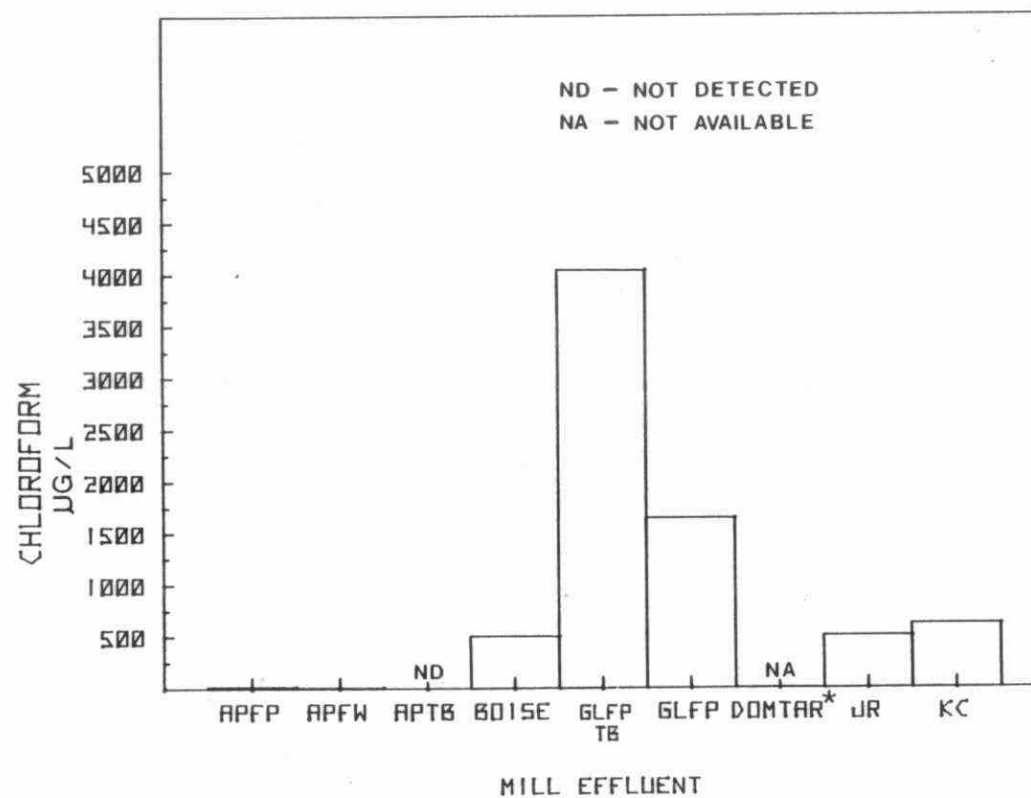


Figure 3 - Concentration of Chloroform in Final Mill Effluents

* NOTE: Mill effluent samples from Domtar Packaging also contained effluent from the Red Rock Water Pollution Control Plant

REFERENCES

- American Conference of Governmental Industrial Hygienists (ACGIH). (1984). TLVs^(R), Threshold Limit Values for Chemical Substances in the Work Environment Adopted by ACGIH for 1984-85. ACGIH, ISBN: 0-936712-54-6.
- B. C. Research. (1979). Biological Characteristics of Pulp Mill Effluent (Part 1). CPAR Project Report 678-1. Environmental Protection Service, Department of the Environment, Ottawa, Ontario.
- Craig, G., Flood, K., Lee, J. and Thomson, M. (1983). Protocol to Determine the Acute Lethality of Liquid Effluents to Fish. Toxicity Unit, Water Resources Branch, Ontario Ministry of Environment, Toronto, Ontario.
- Douglas, G. R. and Nestmann, E. R. (1980). Mutagenic Activity in Pulp Mill Effluents. In: Jully, R. L. et al., ed. Water Chlorination. Environmental Impact and Health Effects, pp. 865-880. Ann Arbor Publishers.
- Flood, K., Hollinger, D., Thomson, M., Wager, W. and Banas, W. (1986). Jackfish Bay: Acute Lethality and Chlorophenol Concentration in Fish Exposed to a Bleached Kraft Mill Effluent (BKME) Plume. Ontario Ministry of the Environment, Toronto, Ontario.
- International Joint Commission (IJC). (1978). Great Lakes Water Quality Agreement. International Joint Commission, Windsor, Ontario.
- International Joint Commission (IJC). (1980). Report of the Aquatic Ecosystem Objectives Committee to the Great Lakes Science Advisory Board, Windsor, Ontario.
- Keith, L. H. and Telliard, W. A. (1979). Priority Pollutants I - A Perspective View. Environmental Science and Technology, 13: 416-423.

McKee, P.M. Scroggins, R.P. and Casson, D.M., IEC Beak Consultants Ltd.
(1984). Provincial Water Quality Objectives: Scientific Criteria
Document for Standard Development No. 2-84 Chlorinated Phenols in the
Aquatic Environment. Prepared for: Water Resources Branch, Ministry of
the Environment, Toronto, Ontario.

Ontario Ministry of the Environment (MOE). (1978). Water Management,
Goals, Policies, Objectives and Implementation Procedures of the
Ministry of the Environment, Water Resources Branch, Toronto, Ontario.

Ontario Ministry of the Environment (MOE). (1982). Chemicals for Further
Evaluation. In: Hazardous Contaminants Program, Chemical
Identification. ISBN 0-7743-7529-9. Ontario Ministry of the
Environment, Toronto, Ontario.

Ontario Ministry of the Environment (MOE). (1983). Handbook of Analytical
Methods for Environmental Samples. Laboratory Services and Applied
Research Branch, Toronto, Ontario.

Shumway, D. L. and Palensky, J. R. (1973). Impairment of the Flavour of
Fish by Water Pollutants. EPA-R3-73-010. U.S. Environmental
Protection Agency, Washington, D.C.

Sigman, C. C., Helmes, C.T., Fay, J.R., Lundquist, P.L. and
Perry, L.R. (1984). A Study of Chemicals in the Wood and
Associated Industries for the Selection of Candidates for Carcinogen
Bioassay. I. Naturally-Occurring Wood Chemicals. J. Environ.
Sci. Health, A19(5): 533-577.

Sullivan, J. R. and Delfino, J.J. (1982). A Select Inventory of
Chemicals Used in Wisconsin's Lower Fox River Basin. WIS-SG-82-238.
University of Wisconsin Sea Grant Institute, Madison, Wisconsin.

Tomlinson, G.H. (1980). Toxicity to Fish Helps Identify Individual Process
Streams. Pulp and Paper Canada, 81(12): 91-102.

U.S. Department of Health and Human Services (USDHHS). (1981). Second Annual Report on Carcinogens, prepared by National Toxicology Program for DHHS, Public Health Service, Washington, D.C.

USEPA. (1981). Appendix III. Toxic and Non-conventional Pollutants Under Investigation in the United States Screening Program.
In: Pulp and Paper Point Sources Task Force of the Water Quality Programs Committee, ed. The Response of the Pulp and Paper Industry in the Great Lakes Basin to Pollution Abatement Programs, pp.59-62. International Joint Commission, Windsor, Ontario.

USEPA. (1982). Pulp, Paper and Paperboard and the Builders' Paper and Board Mills Point Source Categories Effluent Limitations Guidelines, Pretreatment Standards, and New Source Performance Standards. Federal Register, 47(223), Nov. 18, 1982, pp. 52006-52064.

APPENDIX A

APPENDIX A

SAMPLE COLLECTION

	<u>PAGE</u>
1. Discrete Samples for the Toronto Lab	46
2. Composite Samples for the Toronto Lab	47
3. Composite Samples for the Thunder Bay Lab	48
4. Discrete Samples for the Thunder Bay Lab	48
5. Discrete Samples for the Mobile Toxicity Lab, Thunder Bay ..	49

SAMPLE COLLECTION

At the start of the program both grab and composite samples were collected. Effluent was collected in plastic buckets for samples designated for metal analyses and stainless steel or glass containers were used for the remainder of the samples. Effluents were then transferred to individual sample bottles and treated with preservative as required. Composite samples were collected by an Isco sampler in plastic-lined 45 gallon drums.

During the course of the program in order to reduce contamination, minimize sample variability and facilitate sampling, the collection of composite samples was discontinued. Only grab samples were collected, in designated sample bottles, by dipping the sample bottle directly into the effluent stream using a "glug-glug" or bacteriological sampling pole. The samples were collected and treated as described below.

1. Discrete* Samples for the Toronto Lab

- i) Fill one, 1 L bottle and add 3 NaOH pellets; label "Cyanide" (CN).
- ii) Fill one 1 L glass bottle; adjust pH to 10-11 with 5% sodium bicarbonate or one NaOH pellet; check pH with pH sticks, then add 2N zinc acetate (approximately 2 mL are needed) drop by drop, until a white precipitate forms; label "Sulphides".
- iii) Fill up to the label only, one 150 mL sodium thiosulphate treated, glass Bacti bottle; label "Sulphate Reducers"; store at 4°C and ship to the Lab on the same day.
- iv) Fill to the top a 150 mL glass bottle (with foil-lined cap); label "Volatile Organohalides".
- v) Fill to the top a 1 L solvent-rinsed glass, PCB bottle (with foil-lined cap); label "GC/MS - Grab Sample" and ship refrigerated (4°C).

*Note: These samples are to be collected only once per day during the last sampling session.

2. Composite Samples for the Toronto Lab

Use a composite "Isco" sampler or composite samples directly in designated sample bottles by adding specified volumes of effluent to each bottle, at intervals, over a period of time, until the whole bottle is filled. Label the bottle as a "composite" sample and maintain at 4°C storage throughout the whole sampling process.

- i) Fill to the top two, 1 L solvent-rinsed glass, PCB bottles (with foil-lined caps); label "GC/MS - Composite sample" and ship at 4°C.
- * ii) Fill up to the line only, a 1 L solvent-rinsed glass, PCB bottle (with foil-lined cap); label "PCB-OC Scan".
- * iii) Fill up to the line only, a 1 L solvent-rinsed, PCB bottle (with teflon-lined cap); add approximately 2 mL of phosphoric acid/1 L of sample to bring pH to 2.0; label the bottle "Chlorophenol Scan".
- * NOTE: Collect two, 1 L bottles of control water (i.e. raw water from intake pipe at the mill) per batch of samples submitted for PCB-OC and chlorophenol scans. Sampling requirements are the same as described in ii) and iii).
- iv) Fill up to the label only, two, 1 L glass bottles (with teflon or foil caps); adjust to pH 2 with phosphoric acid (approximately 2 mL/1 L); label one bottle "Phenolics Speciated", and the other "Resin, Aromatic and Fatty Acids Scan".
- v) Fill up to the label, a 150 mL glass bottle (with foil-lined cap); label "Tannins".
- vi) Fill one, 150 mL plain, glass Bacti bottle (with a polyseal or foil cap); label "Dissolved Organic Carbon" and "Sulphate".

- vii) Fill up to the label only, one, 150 ml preservative-rinsed, glass, special "phenolics" bottle (with new cap); shake well; label "Total Phenolics" store upright at 4°C and ship same day.

3. Composite Samples for the Thunder Bay Lab

- i) Fill a 1 L glass bottle marked "Total Suspended Solids (TSS) and Total Dissolved Solids (TDS)".
- ii) Fill a 1 L glass bottle marked "Chemical Oxygen Demand (COD)", "Conductivity", "Colour Apparent", "Turbidity" and "BOD₅", "Total Phosphorus (TP)", "Total Kjeldahl Nitrogen (TKN)", "Chloride", "Sodium (Na)" and "pH".
- iii) Fill a 150 mL glass bottle (with polyseal cap) marked "Total Mercury"; preserve with nitric acid and potassium dichromate or potassium permanganate.
- iv) Fill a 500 mL acid-washed plastic Nalgene bottle (with plastic cap) and preserve with 20 drops of concentrated nitric acid; label "Metals + As".

4. Discrete Samples for the Thunder Bay Lab

- i) Fill up to the line only, two, 150 mL sodium thiosulphate treated Bacti bottles; label one bottle "Total and Fecal Coliforms" and the other "Heterotrophs and Pseudomonas".
- ii) Fill a 150 mL glass bottle marked "Ammonia (NH₃)"; and store at 4°C.

5. Discrete Samples for the Mobile Toxicity Lab, Thunder Bay

Collect 15 to 25 gallons of effluent for fish toxicity testing in 5 gallon pails lined with food-grade resin polyethylene bags.

PLEASE NOTE:

It is important that samples requiring refrigeration be shipped in coolers containing ice packs or ice cubes stored in plastic bags. Samples designated for the Toronto lab should be shipped out by air on the same day as collected. Request airlines to refrigerate samples on arrival in Toronto and to deliver them to the MOE lab as soon as possible.

APPENDIX B

APPENDIX B

CHARACTERIZATION OF PULP AND PAPER MILL EFFLUENTS IN ONTARIO

		<u>PAGE</u>
Table 1	Physical, Chemical and Biological Characterization of Abitibi Price Fine Papers, Port Arthur Division, Effluents	60
Table 2	Physical, Chemical and Biological Characterization of Abitibi Price Inc., Fort William Division, Effluents	61
Table 3	Physical, Chemical and Biological Characterization of Abitibi Price Inc., Thunder Bay Division, Effluents and Mill Intake Water	62
Table 4	Physical, Chemical and Biological Characterization of Boise Cascade Canada Limited, Fort Frances, Effluents	63
Table 5	Physical, Chemical and Biological Characterization of Domtar Packaging/Kraft Paper and Board Division Red Rock Mill, Effluents and Mill Intake Water	64
Table 6	Physical, Chemical and Biological Characterization of Great Lakes Forest Products Limited, Dryden, Effluent	65
Table 7	Physical, Chemical and Biological Characterization of Great Lakes Forest Products Limited, Thunder Bay, Effluent	66

Appendix B (cont'd)

	<u>PAGE</u>
Table 8 Physical, Chemical and Biological Characterization of James River Marathon Ltd., (Formerly: American Can Canada Inc.), Effluents	67
Table 9 Physical, Chemical and Biological Characterization of Kimberly-Clark of Canada Limited, Terrace Bay, Effluents and Mill Intake Water	68
Table 10 Bacterial Counts in Abitibi Price Fine Papers, Port Arthur Division, Effluents	69
Table 11 Bacterial Counts in Abitibi Price Inc., Fort William Division, Effluents	70
Table 12 Bacterial Counts in Abitibi Price Inc., Thunder Bay Division, Effluents and Mill Intake Water	71
Table 13 Bacterial Counts in Boise Cascade Canada Limited, Fort Frances, Effluents	72
Table 14 Bacterial Counts in Domtar Packaging/Kraft Paper and Board Division, Red Rock Mill, Effluents and Mill Intake Water	73
Table 15 Bacterial Counts in Great Lakes Forest Products Limited, Dryden, Effluents	74
Table 16 Bacterial Counts in Great Lakes Forest Products Limited, Thunder Bay, Effluent	75

Appendix B (cont'd)

	<u>PAGE</u>
Table 17 Bacterial Counts in James River Marathon Ltd., (Formerly: American Can Canada Ltd.), Marathon, Effluents	76
Table 18 Bacterial Counts in Kimberly-Clark of Canada Limited, Terrace Bay, Effluent	77
Table 19 Inorganic Trace Contaminants in Abitibi Price Fine Papers, Port Arthur Division, Effluents	78
Table 20 Inorganic Trace Contaminants in Abitibi Price Inc., Fort William Division, Effluents	79
Table 21 Inorganic Trace Contaminants in Abitibi Price Inc., Thunder Bay Division, Effluents and Mill Intake Water	80
Table 22 Inorganic Trace Contaminants in Boise Cascade Canada Limited, Fort Frances, Effluents	81
Table 23 Inorganic Trace Contaminants in Domtar Packaging/ Kraft Paper and Board Division Red Rock Mill, Effluents and Mill Intake Water	82
Table 24 Inorganic Trace Contaminants in Great Lakes Forest Products Limited, Dryden, Effluent	83
Table 25 Inorganic Trace Contaminants in Great Lakes Forest Products Limited, Thunder Bay, Effluent	84

APPENDIX B (cont'd)

	<u>PAGE</u>
Table 26 Inorganic Trace Contaminants in James River Marathon Ltd., (Formerly: American Can Canada Inc., Effluents	85
Table 27 Inorganic Trace Contaminants in Kimberly-Clark of Canada Limited, Terrace Bay, Effluents and Mill Intake Water	86
Table 28 Fatty, Aromatic and Resin Acids in Abitibi Price Fine Papers, Port Arthur Division, Effluents	87
Table 29 Fatty, Aromatic and Resin Acids in Abitibi Price Inc., Fort William Division, Effluents	88
Table 30 Fatty, Aromatic and Resin Acids in Abitibi Price Inc., Thunder Bay Division, Effluents and Mill Intake Water	89
Table 31 Fatty, Aromatic and Resin Acids in Boise Cascade Canada Limited, Fort Frances, Effluents	90
Table 32 Fatty, Aromatic and Resin Acids in Domtar Packaging/ Kraft Paper and Board Division Red Rock Mill, Effluents and Mill Intake Water.....	91
Table 33 Fatty, Aromatic and Resin Acids in Great Lakes Forest Products Limited, Dryden, Effluent	92
Table 34 Fatty, Aromatic and Resin Acids in Great Lakes Forest Products Limited, Thunder Bay, Effluent	93

APPENDIX B (cont'd)

	<u>PAGE</u>
Table 35 Fatty, Aromatic and Resin Acids in James River Marathon Ltd., (Formerly: American Can Canada Inc.), Effluents	94
Table 36 Fatty, Aromatic and Resin Acids in Kimberly-Clark of Canada Ltd., Terrace Bay, Effluents and Mill Intake Water	95
Table 37 Specific Phenolic Compounds in Abitibi Price Fine Papers, Port Arthur Division, Effluents	96
Table 38 Specific Phenolic Compounds in Abitibi Price Inc., Fort William Division, Effluents	97
Table 39 Specific Phenolic Compounds in Abitibi Price Inc., Thunder Bay Division, Effluents and Mill Intake Water	98
Table 40 Specific Phenolic Compounds in Boise Cascade Canada Limited, Fort Frances, Effluents	99
Table 41 Specific Phenolic Compounds in Domtar Packaging/Kraft Paper and Board Division Red Rock Mill, Effluents and Mill Intake Water	100
Table 42 Specific Phenolic Compounds in Great Lakes Forest Products Limited, Dryden, Effluent	101
Table 43 Specific Phenolic Compounds in Great Lakes Forest Products Limited, Thunder Bay, Effluent	102

APPENDIX B (cont'd)

	<u>PAGE</u>
Table 44 Specific Phenolic Compounds in James River Marathon Ltd., (Formerly: American Can Canada Inc.), Effluents	103
Table 45 Specific Phenolic Compounds in Kimberly-Clark of Canada Limited, Terrace Bay, Effluent	104
Table 46 Chlorophenol Concentrations in Abitibi Price Fine Papers, Port Arthur Division, Effluents and Mill Intake Water	105
Table 47 Chlorophenol Concentrations in Abitibi Price Inc., Fort William Division, Effluents and Mill Intake Water	106
Table 48 Chlorophenol Concentrations in Abitibi Price Inc., Thunder Bay Division, Effluents and Mill Intake Water	107
Table 49 Chlorophenol Concentrations in Boise Cascade Canada Limited, Fort Frances, Effluents and Mill Intake Water	108
Table 50 Chlorophenol Concentrations in Domtar Packaging/Kraft Paper, and Board Division Red Rock Mill, Effluents and Mill Intake Water	109
Table 51 Chlorophenol Concentrations in Great Lakes Forest Products Limited, Dryden, Effluent and Mill Intake Water	110

APPENDIX B (cont'd)

	<u>PAGE</u>
Table 52 Chlorophenol Concentrations in Great Lakes Forest Products Limited, Thunder Bay, Effluent and Mill Intake Water	111
Table 53 Chlorophenol Concentrations in James River Marathon Ltd., (Formerly: American Can Canada Inc.) Marathon, Effluents and Mill Intake Water	112
Table 54 Chlorophenol Concentrations in Kimberly-Clark of Canada Limited, Terrace Bay, Effluents and Mill Intake Water	113
Table 55 Organohalides in Abitibi Price Fine Papers, Port Arthur Division, Effluents	114
Table 56 Organohalides in Abitibi Price Inc., Fort William Division, Effluents	115
Table 57 Organohalides in Abitibi Price Inc., Thunder Bay Division, Effluents and Mill Intake Water	116
Table 58 Organohalides in Boise Cascade Canada Limited, Fort Frances, Effluents	117
Table 59 Organohalides in Domtar Packaging/Kraft Paper and Board Division Red Rock Mill, Effluents	118
Table 60 Organohalides in Great Lakes Forest Products Limited, Dryden, Effluent	119
Table 61 Organohalides in Great Lakes Forest Products Limited, Thunder Bay, Effluent	120

APPENDIX B (cont'd)

	<u>PAGE</u>
Table 62 Organohalides in James River Marathon Ltd., (Formerly: American Can Canada Inc.), Effluents	121
Table 63 Organohalides in Kimberly-Clark of Canada Limited, Terrace Bay, Effluent	122
Table 64 Polychlorinated Biphenyls (PCB's) and Organochlorine Pesticides in Abitibi Price Fine Papers, Port Arthur Division, Effluents and Mill Intake Water	123
Table 65 Polychlorinated Biphenyls (PCB's) and Organochlorine Pesticides in Abitibi Price Inc., Fort William Division, Effluents and Mill Intake Water	124
Table 66 Polychlorinated Biphenyls (PCB's) and Organochlorine Pesticides in Abitibi Price Inc., Thunder Bay Division, Effluents and Mill Intake Water	125
Table 67 Polychlorinated Biphenyls (PCB's) and Organochlorine Pesticides in Boise Cascade Canada Limited, Fort Frances, Effluents and Mill Intake Water	126
Table 68 Polychlorinated Biphenyls (PCB's) and Organochlorine Pesticides in Domtar Packaging/Kraft Paper and Board Division Red Rock Mill, Effluents and Mill Intake Water	127
Table 69 Polychlorinated Biphenyls (PCB's) and Organochlorine Pesticides in Great Lakes Forest Products Limited, Dryden, Effluent and Mill Intake Water	128

APPENDIX B (cont'd)

	<u>PAGE</u>
Table 70 Polychlorinated Biphenyls (PCB's) and Organochlorine Pesticides in Great Lakes Forest Products Limited, Thunder Bay, Effluent and Mill Intake Water	129
Table 71 Polychlorinated Biphenyls (PCB's) and Organochlorine Pesticides in James River Marathon Ltd., (Formerly: American Can Canada Inc.), Effluents and Mill Intake Water	130
Table 72 Polychlorinated Biphenyls (PCB's) and Organochlorine Pesticides in Kimberly-Clark of Canada Limited, Terrace Bay, Effluent and Mill Intake Water	131

TABLE:1 PHYSICAL, CHEMICAL AND BIOLOGICAL CHARACTERIZATION OF
ABITIBI PRICE FINE PAPERS, PORT ARTHUR DIVISION, EFFLUENTS.

PHYSICAL, CHEMICAL AND BIOLOGICAL CHARACTERIZATION																			
DATE SAMPLED/ SAMPLE DESCRIPTION	D O C	T A N N I S	S U L P H A T E	R E P R E S E N T I O N S	B O D	T O S T A L I D S	S U S P E N S I O N S	D I S S O L V E D	C O D	C O L O U R	C O N D U C T I V I T Y	T U R B I D I T Y	T P	T K N	C H L O R I D E	S O D I U M	P H	A M M O N I A	(1) L C 5 0
JULY 7, 1982: GROUNDWOOD EFFLUENT	17.0	5	6.4	1.2	--	--	--	--	--	--	--	--	--	--	--	--	--	--	100
PAPER MILL EFFLUENT	78.0	5	191.0	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	NL
AUGUST 4, 1982: FINAL EFFLUENT	18.2	4	20.5	<1.0	55	280	25	255	80	39	315	33	0.09	1.6	6.8	13	7.0	0.02	--
ALL CONCENTRATIONS	MG/L	MG/L	MG/L	UG/L	MG/L	MG/L	MG/L	MG/L	MG/L	HZ	US/CM	FTU	MG/L	MG/L	MG/L	MG/L	SU	MG/L	%

-- -NOT AVAILABLE
HZ -HAZEN UNITS
US/CM -MICROSIEMENS/CM
FTU -FORMAZIN TURBIDITY UNITS
SU -STANDARD UNITS
NL -NON LETHAL
DOC -DISSOLVED ORGANIC CARBON
BOD -BIOLOGICAL OXYGEN DEMAND
COD -CHEMICAL OXYGEN DEMAND
TP -TOTAL PHOSPHORUS
TKN -TOTAL KJELDAHL NITROGEN
(1) -FISH BIOASSAY-% CONCENTRATION LETHAL
TO 50% OF FISH IN 96 HOURS.
< -LESS THAN

TABLE:2 PHYSICAL, CHEMICAL AND BIOLOGICAL CHARACTERIZATION OF
ABITIBI PRICE INC., FORT WILLIAM DIVISION, EFFLUENTS.

PHYSICAL,CHEMICAL AND BIOLOGICAL CHARACTERIZATION																			
DATE SAMPLED/ SAMPLE DESCRIPTION	D O C	T A N N I O N S	S U L P H A T E S	R E P R E S E N T A T I O N S	B O D	T O S L I D S	S U P H O S P H O R U S	D I S S O L V E D	C O D	C O L O R	C O N D U C T I V I T Y	T U R B I D I T Y	T P	T K N	C H L O R I D E	S O D I U M	P H	A M M O N I A	(1) L C 5 0
JULY 21,1982: COMBINED FINAL EFFLUENT*	300	250	183	300	360	1420	70	1350	1490	600	880	100	0.50	2.6	36	200	5.7	0.06	75
FINAL EFFLUENT**	284	200	162	212	290	1290	25	1265	960	397	875	100	1.30	5.3	31	200	6.0	0.04	NL
WOODROOM EFFLUENT	505	400	222	600	580	1760	130	1630	2204	1264	890	130	1.40	5.8	35	190	5.3	0.16	14
SCMP EFFLUENT	644	400	313	660	670	2980	245	2735	2910	707	1690	220	0.40	3.3	36	400	5.7	0.10	17
ALL CONCENTRATIONS	MG/L	MG/L	MG/L	UG/L	MG/L	MG/L	MG/L	MG/L	MG/L	HZ	US/CM	FTU	MG/L	MG/L	MG/L	MG/L	SU	MG/L	%

-- -NOT AVAILABLE
* -NO.1 & NO.2 LAGOON EFFLUENTS AND WOODROOM EFFLUENT
** -NO.1 & NO.2 LAGOON EFFLUENTS
SCMP -SEMI CHEMICAL MECHANICAL PULPING
HZ -HAZEN UNITS
US/CM -MICROSIEMENS/CM
FTU -FORMAZIN TURBIDITY UNITS
S'J -STANDARD UNITS
NL -NON LETHAL
DOC -DISSOLVED ORGANIC CARBON
BOD -BIOLOGICAL OXYGEN DEMAND
COD -CHEMICAL OXYGEN DEMAND
TP -TOTAL PHOSPHORUS
TKN -TOTAL KJELDAHL NITROGEN
(1) -FISH BIOASSAY-% CONCENTRATION LETHAL
TO 50% OF FISH IN 96 HOURS.

- 62 -

BOD -BIOLOGICAL OXYGEN DEMAND
COD -CHEMICAL OXYGEN DEMAND
TP -TOTAL PHOSPHORUS
TKN -TOTAL KJELDAHL NITROGEN
(1) -FISH BIOASSAY-% CONCENTRATION LETHAL
TO 50% OF FISH IN 96 HOURS.
≤ -LESS THAN

TABLE:4 PHYSICAL, CHEMICAL AND BIOLOGICAL CHARACTERIZATION OF
BOISE CASCADE CANADA LIMITED, FORT FRANCES, EFFLUENTS.

PHYSICAL,CHEMICAL AND BIOLOGICAL CHARACTERIZATION																				
DATE SAMPLED/ SAMPLE DESCRIPTION	D O C	T A N N I O S	S U L P H A T E	R E P R E S E N T I O N S	B O D	T O T A L	S S	S S	S S	C O D	C O L O R	C O N D U C T I V I T Y	T U R B I D I T Y	T P	T K N	C H L O R I D E	S O D I U M	P H	A M M O N I A	(1) L C 5 0
JULY 13,1982: FINAL EFFLUENT SECONDARY LAGOON INFLUENT SECONDARY LAGOON EFFLUENT	180 230 245	150 200 200	128 76 168	380 1500 660	120 310 80	1630 1690 2640	100 65 75	1530 1625 2565	850 1040 1010	2075 2117 3980	1930 1860 3520	8.6 2.7 0.9	1.3 1.6 1.9	4.3 4.5 7.0	445 197 905	340 380 660	6.6 10.4 6.9	0.06 0.50 0.14	81 57 >80	
ALL CONCENTRATIONS	MG/L	MG/L	MG/L	UG/L	MG/L	MG/L	MG/L	MG/L	MG/L	HZ	US/CM	FTU	MG/L	MG/L	MG/L	MG/L	SU	MG/L	%	

HZ -HAZEN UNITS
 US/CM -MICROSIEMENS/CM
 FTU -FORMAZIN TURBIDITY UNITS
 SU -STANDARD UNITS
 > -GREATER THAN
 DOC -DISSOLVED ORGANIC CARBON
 BOD -BIOLOGICAL OXYGEN DEMAND
 COD -CHEMICAL OXYGEN DEMAND
 TP -TOTAL PHOSPHORUS
 TKN -TOTAL KJELDAHL NITROGEN
 (1) -FISH BIOASSAY-% CONCENTRATION LETHAL
 TO 50% OF FISH IN 96 HOURS.
 (2) -SPLIT SAMPLE

TABLE:5 PHYSICAL, CHEMICAL AND BIOLOGICAL CHARACTERIZATION OF DOMTAR PACKAGING/KRAFT PAPER AND BOARD DIVISION RED ROCK MILL, EFFLUENTS AND MILL INTAKE WATER.

PHYSICAL,CHEMICAL AND BIOLOGICAL CHARACTERIZATION																				
DATE SAMPLED/ SAMPLE DESCRIPTION	D O C	T A N N I S	S U L P H A T E S	R E P R E S E N T A T I O N S	B O D	T O T A L D I S S O L V E D O R G A N I C C A R B O N	S U P H O R E P H O S P H O R U S	D I S S O L V E D O R G A N I C C A R B O N	C O L O R I M E T E R	C O U N T I N G P O W E R	T U R B I D I T Y	T E M P E R A T U R E	T O T A L P H O S P H O R U S	C H L O R O P H Y L A C H L O R O P H Y L	S U L F A T E S	P H	A M M O N I A	(1) L C 5 0		
JUNE 14,1982: FINAL EFFLUENT*	--	50	--	1520	100	580	80	500	480	400	625	27	0.30	2.1	32.0	115	7.0	0.34	--	
JULY 5,1982: WOODROOM EFFLUENT	680	400	66.6	1800	1000	5000	1690	3210	3780	2722	1523	35	3.70	16.0	15.0	17	3.7	0.08	3.3	
ALUM UNTREATED	540	500	1140	600	1200	3650	2220	1430	5480	2824	294	36	3.40	17.0	14.0	17	5.4	0.12	3.9	
JULY 17,1983: FINAL EFFLUENT*	55	50	154	3350	130	780	65	715	460	434	745	51	0.36	2.0	89.0	120	7.0	0.82	84.	
MILL INTAKE WATER	4	0	2.7	<0.4	0.4	120	3	117	3	13	131	2	0.01	0.3	1.4	2	7.8	0.34	NL	
JULY 18,1983: FINAL EFFLUENT*	86	50	141	2980	110	630	80	550	429	289	620	55	0.29	2.0	58.0	100	6.8	0.25	80(2) >100(3)	
MILL INTAKE WATER	4	0	3.0	<0.2	0.7	100	1	99	8	15	124	3	0.01	0.2	1.3	2	7.9	0.01	NL	
JULY 19,1983: FINAL EFFLUENT*	41	50	116	3020	106	470	70	400	349	227	424	49	0.25	1.9	16.0	70	6.8	0.33	>100	
MILL INTAKE WATER	3	0	3.1	<0.4	0.7	85	3	82	14	11	117	3	0.01	0.2	1.3	1	7.7	0.01	NL	
JULY 20,1983: FINAL EFFLUENT*	57	60	114	2360	120	530	90	440	413	347	454	48	0.25	1.6	18.0	80	7.1	0.15	78	
MILL INTAKE WATER	4	1	3.1	0.8	0.9	110	6	104	6	15	119	2	0.01	0.2	1.3	2	7.7	0.01	NL	
JULY 21,1983: FINAL EFFLUENT*	75	60	140	3040	128	680	70	610	420	389	665	48	0.41	2.2	71.0	110	7.0	0.03	90	
MILL INTAKE WATER	4	1	3.1	<0.6	0.7	85	2	83	1	14	127	2	0.01	0.2	1.4	2	7.8	0.02	NL	
ALL CONCENTRATIONS	MG/L	MG/L	MG/L	UG/L	MG/L	MG/L	MG/L	MG/L	MG/L	HZ	US/CM	FTU	MG/L	MG/L	MG/L	MG/L	SU	MG/L	%	

-- -NOT AVAILABLE
HZ -HAZEN UNITS
US/CM -MICROSIEMENS/CM
FTU -FORMAZIN TURBIDITY UNITS
SU -STANDARD UNITS
NL -NON LETHAL
DOC -DISSOLVED ORGANIC CARBON
BOD -BIOLOGICAL OXYGEN DEMAND
COD -CHEMICAL OXYGEN DEMAND

TP -TOTAL PHOSPHORUS
TKN -TOTAL KJELDAHL NITROGEN
(1) -FISH BIOASSAY-% CONCENTRATION LETHAL
TO 50% OF FISH IN 96 HOURS.
(2) -GRAB SAMPLE
(3) -24-HOUR COMPOSITE SAMPLE
< -LESS THAN
> -GREATER THAN

* NOTE: Mill effluent samples from Domtar Packaging also
effluent from the Red Rock Water Pollution Control Plant

TABLE:6 PHYSICAL, CHEMICAL AND BIOLOGICAL CHARACTERIZATION OF
GREAT LAKES FOREST PRODUCTS LIMITED, DRYDEN, EFFLUENT.

PHYSICAL, CHEMICAL AND BIOLOGICAL CHARACTERIZATION																			
DATE SAMPLED/ SAMPLE DESCRIPTION	D O C	T A N N I S	S U L P H A T E	R E P A H C E I O V L C S	B O D	T O S T O A L D S	S U P E N S I D I D S	D I S S O L V E D S	C O D	C O L O R	C O N D U C T I V I T Y	T U R B I D I T Y	T P	T K N	C H L O R I D E	S O D I U M	P H	A M M O N I A	(1) L C 5 0
AUGUST 23, 1982: FINAL EFFLUENT	100	50	--	--	60	1060	55	1005	390	1120	1310	21	0.28	1.3	229	220	6.5	0.05	NL
ALL CONCENTRATIONS	MG/L	MG/L	MG/L	UG/L	MG/L	MG/L	MG/L	MG/L	MG/L	HZ	US/CM	FTU	MG/L	MG/L	MG/L	MG/L	SU	MG/L	%

-- -NOT AVAILABLE
HZ -HAZEN UNITS
US/CM -MICROSIEMENS
FTU -FORMAZIN TURBIDITY UNITS
SU -STANDARD UNITS
NL -NON LETHAL
DOC -DISSOLVED ORGANIC CARBON
BOD -BIOLOGICAL OXYGEN DEMAND
COD -CHEMICAL OXYGEN DEMAND
TP -TOTAL PHOSPHORUS
TKN -TOTAL KJELDAHL NITROGEN
(1) -FISH BIOASSAY-% CONCENTRATION LETHAL
TO 50% OF FISH IN 96 HOURS.

TABLE:7 PHYSICAL, CHEMICAL AND BIOLOGICAL CHARACTERIZATION OF
GREAT LAKES FOREST PRODUCTS LIMITED, THUNDER BAY, EFFLUENT.

PHYSICAL,CHEMICAL AND BIOLOGICAL CHARACTERIZATION																			
DATE SAMPLED/ SAMPLE DESCRIPTION	D O C	T A N N I S	S U L P H A T E	R E P R E S E N T A T I O N S	B O D	T O S T A L I D S	S P E N S I D E L I D S	D I S S O L V E D I D S	C O D	C O L O U R	C O N D U C T I V I T Y	T U R B I D I T Y	T P	T K N	C H L O R I D E	S O D I U M	P H	A M M O N I A	(1) L C 5 0
JUNE 8,1982: FINAL EFFLUENT	60	400	162	2400	400	2440	110	2330	2160	1600	1750	11	0.78	2.9	309	373	6.3	0.05	26
ALL CONCENTRATIONS	MG/L	MG/L	MG/L	UG/L	MG/L	MG/L	MG/L	MG/L	MG/L	HZ	US/CM	FTU	MG/L	MG/L	MG/L	MG/L	SU	MG/L	%

HZ -HAZEN UNITS
US/CM -MICROSIEMENS/CM
FTU -FORMAZIN TURBIDITY UNITS
SU -STANDARD UNITS
DOC -DISSOLVED ORGANIC CARBON
BOD -BIOLOGICAL OXYGEN DEMAND
COD -CHEMICAL OXYGEN DEMAND
TP -TOTAL PHOSPHORUS
TKN -TOTAL KJELDAHL NITROGEN
(1) -FISH BIOASSAY-% CONCENTRATION LETHAL
TO 50% OF FISH IN 96 HOURS.
(2) -SPLIT SAMPLE

TABLE:8 PHYSICAL, CHEMICAL AND BIOLOGICAL CHARACTERIZATION OF JAMES RIVER MARATHON LTD.,
(FORMERLY: AMERICAN CAN CANADA INC.), EFFLUENTS.

PHYSICAL, CHEMICAL AND BIOLOGICAL CHARACTERIZATION																			
DATE SAMPLED/ SAMPLE DESCRIPTION	D O C	T A N I N S	S U L P H A T E	R E P A H C E T N I O V L E I C S	B O D	T O S T O A L I D S	S U S P E N S I O L S D O S	D I S S O L V E L D S	C O D	C O L O U R	C O N D U C T I V I T Y	T U R B I D I T Y	T P	T K N	C H L O R I D E	S O D I U M	P H	A M M O N I A	(1) L C 5 0
JUNE 22, 1982: FINAL EFFLUENT	127	30	158	120	280	2140	230	1910	1200	2424	2450	1.7	0.410	1.80	469	630	9.8	0.15	87
MAIN MILL EFFLUENT	365	400	172	6400	140	1460	225	1235	780	--	1590	--	0.280	2.90	255	370	10.3	0.07	--
ACIDIC SEWER EFFLUENT	233	50	180	116	300	2080	11	2069	940	--	11900	--	2.400	1.10	1814	320	1.8	0.19	--
ALKALINE SEWER EFFLUENT	245	100	142	3400	70	1140	70	1070	370	--	1540	--	0.043	0.28	308	356	9.8	0.02	--
AUGUST 16, 1982: FINAL EFFLUENT	185	100	--	2600	240	1410	30	1380	770	1306	1910	25.0	0.320	1.90	443	370	3.9	1.70	<20
ALL CONCENTRATIONS	MG/L	MG/L	MG/L	UG/L	MG/L	MG/L	MG/L	MG/L	MG/L	HZ	US/CM	FTU	MG/L	MG/L	MG/L	MG/L	SU	MG/L	%

- -NOT AVAILABLE
HZ -HAZEN UNITS
US/CM -MICROSIEMENS/CM
FTU -FORMAZIN TURBIDITY UNITS
SU -STANDARD UNITS
< -LESS THAN
DOC -DISSOLVED ORGANIC CARBON
BOD -BIOLOGICAL OXYGEN DEMAND
COD -CHEMICAL OXYGEN DEMAND
TP -TOTAL PHOSPHORUS
TKN -TOTAL KJELDAHL NITROGEN
(1) -FISH BIOASSAY-% CONCENTRATION LETHAL
TO 50% OF FISH IN 96 HOURS.
(2) -SPLIT SAMPLE

TABLE:9 PHYSICAL, CHEMICAL AND BIOLOGICAL CHARACTERIZATION OF
KIMBERLY-CLARK OF CANADA LIMITED, TERRACE BAY, EFFLUENTS AND MILL INTAKE WATER.

PHYSICAL, CHEMICAL AND BIOLOGICAL CHARACTERIZATION																			
DATE SAMPLED/ SAMPLE DESCRIPTION	D O C	T A N N S	S U L P H A T E	R E P A H C E I O V L C S	B O D	T O S A L I D S	S U S P E N S I O L S	D I S S O L V E D S	C O D	C O U R	C O N D U C T I V I T Y	T U R B I D I T Y	T P	T K N	C H L O R I D E	S O D I U M	P H	A M M O N I A	(1) L C 5 0
AUGUST 10, 1982: FINAL EFFLUENT	285	150	--	3400	280	1730	30	1700	970	1913	2430	4.2	0.43	2.50	548	430	3.5	1.60	25
JULY 10, 1983: FINAL EFFLUENT	260	--	85.0	2000	240	1550	30	1520	898	--	1820	--	0.08	2.10	461	340	4.5	0.90	18
MILL INTAKE WATER	2	--	4.0	0.4	0.3	65	1	64	8	--	99	--	0.01	.13	1.6	1.6	7.7	<.01	--
JULY 11, 1983: FINAL EFFLUENT	338	--	102.0	2460	540	1750	30	1720	1545	--	2470	--	0.38	2.80	631	370	3.0	2.1	8(2) 14(3)
MILL INTAKE WATER	10	--	4.0	0.4	0.8	70	1	69	5	--	99	--	0.01	.18	1.6	1.6	7.7	<.01	--
JULY 12, 1983: FINAL EFFLUENT	177	--	141.0	260	140	1520	25	1495	694	--	1840	--	0.51	1.00	440	350	4.5	0.2	26
MILL INTAKE WATER	2	--	4.5	<0.2	0.8	55	1	54	7	--	99	--	0.01	.16	1.5	1.4	7.7	<.01	--
JULY 13, 1983: FINAL EFFLUENT	273	--	99.0	2180	235	1650	30	1620	985	--	1960	--	0.53	2.50	346	360	4.1	1.6	19
MILL INTAKE WATER	2	--	6.0	0.2	0.6	75	1	74	18	--	99	--	0.01	.22	1.6	1.8	7.7	<.01	--
JULY 14, 1983: FINAL EFFLUENT	--	--	114.0	--	245	1460	30	1430	976	--	1630	--	0.41	3.00	381	320	5.5	1.0	42
MILL INTAKE WATER	2	--	4.5	<0.2	0.5	90	1	89	2	--	101	--	0.01	.16	2.0	2.2	7.8	<.01	--
ALL CONCENTRATIONS	MG/L	MG/L	MG/L	UG/L	MG/L	MG/L	MG/L	MG/L	MG/L	HZ	US/CM	FTU	MG/L	MG/L	MG/L	MG/L	SU	MG/L	%

- -NOT AVAILABLE
HZ -HAZEN UNITS
US/CM -MICROSIEMENS/CM
FTU -FORMAZIN TURBIDITY UNITS
SU -STANDARD UNITS
DOC -DISSOLVED ORGANIC CARBON
BOD -BIOLOGICAL OXYGEN DEMAND
COD -CHEMICAL OXYGEN DEMAND
TP -TOTAL PHOSPHORUS
TKN -TOTAL KJELDAHL NITROGEN
(1) -FISH BIOASSAY-% CONCENTRATION LETHAL
TO 50% OF FISH IN 96 HOURS.
(2) -GRAB SAMPLE
(3) -24-HOUR COMPOSITE SAMPLE
< -LESS THAN

TABLE:10 BACTERIAL COUNTS IN ABITIBI PRICE FINE PAPERS,
PORT ARTHUR DIVISION, EFFLUENTS.

BACTERIA (COUNTS PER 100 ML)							
DATE SAMPLED/ SAMPLE DESCRIPTION	T O C T O A L L I F O R M S	F E C C O A L L I F O R M S	F E S C T A R L E P T O C O C I	(1) H E T E R O T R O P H S	P S A E E U R D U O G M I O N N O A S S A	E S C H E R I C C H O I L A I	S U R L E P D H U A C T E R S
JULY 7,1982: GROUNDWOOD EFFLUENT	<100	<100	6800	240000	<100	<100	300
PAPER MILL EFFLUENT	5800	<100	<100	9900	<100	<100	--
AUGUST 4,1982: FINAL EFFLUENT	A 20000	<100	<100	1400000	<10	<100	92

-- -NOT AVAILABLE
(1) -COUNTS PER 1 ML
A -APPROXIMATELY
< -LESS THAN

TABLE:11 BACTERIAL COUNTS IN ABITIBI PRICE INC.,
FORT WILLIAM DIVISION, EFFLUENTS.

		BACTERIA (COUNTS PER 100 ML)						
DATE SAMPLED/ SAMPLE DESCRIPTION		(1)						
		T O C A L I F O R M S	F E C O L I F O R M S	F E S T A R E P T O C O C C I	H E T E R O T R O P H S	P S A E E U R D U O G M I O N O A 'S S A	E S C H E R I C C H O I L A I	S U R L E P D H U A C T E R S
JULY 21,1982:								
COMBINED FINAL EFFLUENT*		3500000	A 50000	2800	4200000	--	A 20000	<3000
FINAL EFFLUENT**		820000	26000	1800	6000000	--	A 50000	<3000
WOODROOM EFFLUENT		15000000	A 40000	6700	5500000	--	A 40000	>1100000
SCMP EFFLUENT		43000	A 4000	3000	29000	--	A 2000	240000

-- -NOT AVAILABLE

(1) -COUNTS PER 1 ML

* -NO.1 & NO.2 LAGOON EFFLUENTS AND WOODROOM EFFLUENT

** -NO.1 & NO.2 LAGOON EFFLUENTS

SCMP-SEMI CHEMICAL MECHANICAL PULPING

A -APPROXIMATELY

< -LESS THAN

> -GREATER THAN

TABLE:12 BACTERIAL COUNTS IN ABITIBI PRICE INC.,
THUNDER BAY DIVISION, EFFLUENTS AND MILL INTAKE WATER.

		BACTERIA (COUNTS PER 100 ML)						
DATE SAMPLED/ SAMPLE DESCRIPTION		(1)						
		T O C A L I F O R M S	F E C O A L I F O R M S	F E S T A R L E P T O C O C I	H E T E R O T R O P H S	P S A E E U R D O G M I O N O A S S A	E S C H E R I C C H O I L A I	S U R L E P D H U A C T E R S
JUNE 3,1982: FINAL EFFLUENT		--	--	--	--	--	--	24000
JUNE 16,1982: FINAL EFFLUENT		5100	<10	160	6700000	A 30	<10	43000
JULY 21,1982: FINAL EFFLUENT		A620000	A 200	1400	--	--	<100	240000
MILL INTAKE WATER		370	84	172	--	--	--	<300
JULY 22,1982: FINAL EFFLUENT		460000	A 300	3800	--	--	--	240000
MILL INTAKE WATER		A 700	<4	4	--	--	--	150
JULY 23,1982: FINAL EFFLUENT		260000	A 50	4700	--	A 200	--	150000
MILL INTAKE WATER		A 200	<4	12	--	<2	--	23

-- -NOT AVAILABLE
(1) -COUNTS PER 1 ML
A -APPROXIMATELY
< -LESS THAN

TABLE:13 BACTERIAL COUNTS IN BOISE CASCADE CANADA LIMITED,
FORT FRANCES, EFFLUENTS.

DATE SAMPLED/ SAMPLE DESCRIPTION	BACTERIA (COUNTS PER 100 ML)						
	T O C T O T A L I F O R M S	F E C O L I F O R M S	F E S T C T A R E L P T O C C I	(1) H E T E R O T R O P H S	P S A E E U R D U O G M I O N O A S S A	E S C H E R I C C H O I L A I	S U R L E P D H U A C T E R S
JULY 13, 1982:							
FINAL EFFLUENT	2500000	3300000	810000	60000000	A 100	<100000	>11000
SECONDARY LAGOON INFLUENT	25000	27000	8900	37000	A 100	<1000	240
SECONDARY LAGOON EFFLUENT	5200000	4600000	720000	110000000	<100	<100000	>11000
--	-NOT AVAILABLE						
(1)	-COUNTS PER 1 ML						
A	-APPROXIMATELY						
<	-LESS THAN						
>	-GREATER THAN						

TABLE:14 BACTERIAL COUNTS IN DOMTAR PACKAGING/KRAFT PAPER AND BOARD DIVISION,
RED ROCK MILL, EFFLUENTS AND MILL INTAKE WATER.

DATE SAMPLED/ SAMPLE DESCRIPTION	BACTERIA (COUNTS PER 100 ML)						
	T O C A L I F O R M S	F E C O A L I F O R M S	F E S C T A R L E P T O C O C I	(1) H E T E R O T R O P H S	P S A E E U R D U O G M I O N O A S S A	E S C H E R I C C H O I L A I	S U R L E P D H U A C T E R S
JUNE 14,1982: FINAL EFFLUENT*	12000000	A 100	A 900	15000000	A 40	A 100	2400000
JULY 5,1982: WOODROOM EFFLUENT:							
ALUM UNTREATED	240000	A 8000	<1000	32000000	A 6000	<1000	1500000
ALUM TREATED	A 6000	<1000	<1000	2000000	<1000	<1000	43000
JULY 17,1983: FINAL EFFLUENT *	A 100000	<10000	<1000	22000000	<100	<1000	460000
MILL INTAKE WATER	A 520	8	<4	2350	<2	--	430
JULY 18,1983: FINAL EFFLUENT *	A 300000	A 2000	A 700	13500000	<100	A 200	>1100000
MILL INTAKE WATER	A 480	<4	<4	3800	<2	--	43
JULY 19,1983: FINAL EFFLUENT *	A 90000	A 1300	<100	8500000	<100	A 400	1100000
MILL INTAKE WATER	100	<4	<4	A 1500	<2	--	92
JULY 20,1983: FINAL EFFLUENT *	A 370000	A 4000	A 100	3300000	A 100	A 100	93000
MILL INTAKE WATER	220	<4	4	A 2500	<2	8	93
JULY 21,1983: FINAL EFFLUENT *	A 400000	A 2000	<100	26500000	<100	<1000	1100000
MILL INTAKE WATER	570	16	4	3000	2	--	39

-- -NOT AVAILABLE

(1) -COUNTS PER 1 ML

A -APPROXIMATELY

< -LESS THAN

> -GREATER THAN

* NOTE: Mill effluent samples from Domtar Packaging also contained
effluent from the Red Rock Water Pollution Control Plant

TABLE:15 BACTERIAL COUNTS IN GREAT LAKES FOREST PRODUCTS LIMITED,
DRYDEN, EFFLUENT.

BACTERIA (COUNTS PER 100 ML)							
DATE SAMPLED/ SAMPLE DESCRIPTION	T O C T A L F O R M S	F E C O L I F O R M S	F E S T A R E P T O C O C I	(1)		E S C H E R I C C H O I L A I	S U R L E P D H U A C T E R S
				H E T E R O T R O P H S	P S E E U R D U O G M I N O A S S A		
AUGUST 23, 1982: FINAL EFFLUENT	69000000	<10000	2500	--	<100	<10000	93000

-- -NOT AVAILABLE
(-COUNTS PER 1 ML
< -LESS THAN

TABLE:16 BACTERIAL COUNTS IN GREAT LAKES FOREST PRODUCTS LIMITED,
THUNDER BAY, EFFLUENT.

BACTERIA (COUNTS PER 100 ML)							
DATE SAMPLED/ SAMPLE DESCRIPTION	T O C T O A L L I F O R M S	F E C C O A L L I F O R M S	F E S C T A R L E P T O C O C I	(1) H E T E R O T R O P H S	P S A E E U R D U O G M I O N N O A S S A	E S C H E R I C C H O I L A I	S U R L E P D H U A C T E R S
JUNE 8,1982: FINAL EFFLUENT	44000000	3600000	A 200	6600000	<100	--	23000

-- -NOT AV (BLE
(1) -COUNTS PER 1 ML
A -APPROXIMATELY
< -LESS THAN

TABLE:17 BACTERIAL COUNTS IN JAMES RIVER MARATHON LTD.,
(FORMERLY: AMERICAN CAN CANADA LTD.), MARATHON, EFFLUENTS.

DATE SAMPLED/ SAMPLE DESCRIPTION	BACTERIA (COUNTS PER 100 ML)						
	T O C T O A L I F O R M S	F E C C O L A L I F O R M S	F E S C T A R L E P T O C O C C I	(1) H E T E R O T R O P H S	P S A E E U R D U O G M I O N O A S S A	E S C H E R I C C H O I L A I	S U R L E P D H U A C T E R S
JUNE 22,1982:							
FINAL EFFLUENT	<100	<10	A 50	1100	<10	<10	<300
MAIN MILL EFFLUENT	<10	<10	140	485	<10	<10	<300
ACIDIC SEWER EFFLUENT	<10	<10	<10	<10	<10	<10	<300
ALKALINE SEWER EFFLUENT	<100	<10	<10	<10	<10	<10	<300
AUGUST 16,1982:							
FINAL EFFLUENT	<10	<10	<10	<10	<10	<10	4

-- NOT AVAILABLE
(1) -COUNTS PER 1 ML
A -APPROXIMATELY
< -LESS THAN

TABLE:18 BACTERIAL COUNTS IN KIMBERLY-CLARK OF CANADA LIMITED,
TERRACE BAY, EFFLUENT.

BACTERIA (COUNTS PER 100 ML)							
DATE SAMPLED/ SAMPLE DESCRIPTION	T O C T O A L L I F O R M S	F E C C O A L L I F O R M S	F E S C T A R L E P T O C O C C I	(1) H E T E R O T R O P H S	P S A E E U R D U O G M I O N N O A S S A	E S C H E R I C C H O I L A I	S U R L E P D H U A C T E R S
AUGUST 10,1982: FINAL EFFLUENT	<100	<100	<100	<100	<100	<100	390
-- -NOT AVAILABLE	(1) -COUNTS PER 1 ML						
< -LESS THAN							

TABLE:19 INORGANIC TRACE CONTAMINANTS IN ABITIBI PRICE FINE PAPERS,
PORT ARTHUR DIVISION, EFFLUENTS.

CONCENTRATIONS OF INORGANIC TRACE CONTAMINANTS (MG/L = PPM)															
DATE SAMPLED/ SAMPLE DESCRIPTION	(1) M E R C U R Y	A L U M I N U M	A R S E N I C	C A D M I U M	C O B A L T	C H R O M I U M	C O P P E R	I R O N	M A N G A N E S E	M O L Y B D E N U M	N I C K E L	L E A D	Z I N C	H Y D R O P H E N E	C Y A N I D E
JULY 7,1982:															
GROUNDWOOD EFFLUENT	--	--	--	--	--	--	--	--	--	--	--	--	--	<0.02	<0.005
PAPER MILL EFFLUENT	--	--	--	--	--	--	--	--	--	--	--	--	--	<0.02	<0.005
AUGUST 4,1982:															
FINAL EFFLUENT	<0.05	0.57	<0.001	<0.005	<0.02	0.02	0.018	0.33	0.089	<0.05	<0.02	<0.03	0.18	<0.02	<0.005

-- -NOT AVAILABLE

(1) -CONCENTRATIONS IN UG/L = PPB

< -LESS THAN

TABLE:20 INORGANIC TRACE CONTAMINANTS IN ABITIBI PRICE INC.,
FORT WILLIAM DIVISION, EFFLUENTS.

CONCENTRATIONS OF INORGANIC TRACE CONTAMINANTS (MG/L = PPM)															
DATE SAMPLED/ SAMPLE DESCRIPTION	(1) M E R C U R Y	A L U M I N U M	A R S E N I C	C A D M I U M	C O B A L T	C H R O M I U M	C O P P E R	I R O N	M A N G A N E S E	M O L Y B D E N U M	N I C K E L	L E A D	Z I N C	H Y D R O P H E N I D E	C Y A N I D E
JULY 21,1982:															
COMBINED FINAL EFFLUENT*	<0.05	2.0	0.001	0.005	<0.02	0.04	0.03	4.3	0.67	<0.02	<0.02	<0.03	0.08	2.00	<0.005
FINAL EFFLUENT*	<0.05	2.0	<0.001	0.005	<0.02	0.03	0.02	1.8	0.41	<0.02	<0.02	<0.03	0.06	0.19	<0.005
WOODROOM EFFLUENT	<0.05	2.2	0.002	0.007	<0.02	0.08	0.03	7.7	1.20	0.02	<0.02	<0.03	0.11	7.50	<0.005
SCMP EFFLUENT	0.16	3.6	<0.001	<0.005	<0.02	0.06	0.09	1.7	0.56	0.02	<0.02	0.03	2.10	<0.02	<0.005

(1) -CONCENTRATIONS IN UG/L = PPB

* -NO.1 & NO.2 LAGOON EFFLUENTS AND WOODROOM EFFLUENT

** -NO.1 & NO.2 LAGOON EFFLUENTS

SCMP-SEMI CHEMICAL MECHANICAL PULPING

< -LESS THAN

TABLE:21 INORGANIC TRACE CONTAMINANTS IN ABITIBI PRICE INC.,
THUNDER BAY DIVISION, EFFLUENTS AND MILL INTAKE WATER.

CONCENTRATIONS OF INORGANIC TRACE CONTAMINANTS (MG/L = PPM)															
DATE SAMPLED/ SAMPLE DESCRIPTION	(1) M E R C U R Y	A L U M I N U M	A R S E N I C	C A D M I U M	C O B A L T	C H R O M I U M	C O P P E R	I R O N	M A N G A N E S E	M O L Y B D E N U M	N I C K E L	L E A D	Z I N C	H Y D R O P H E I N D E	C Y A N I D E
JUNE 3,1982: FINAL EFFLUENT	0.07	1.10	0.001	<0.0050	<0.020	0.080	<0.010	0.95	0.500	--	<0.020	<0.030	0.080	<0.02	<0.005
JUNE 16,1982: FINAL EFFLUENT	--	--	--	--	--	--	--	--	--	--	--	--	--	0.12	--
JULY 21,1982: FINAL EFFLUENT	0.88	0.65	0.005	<0.0002	0.002	0.004	0.011	--	--	--	0.004	0.007	0.046	0.02	<0.005
MILL INTAKE WATER	<0.05	0.12	<0.001	<0.0002	<0.001	<0.001	0.005	--	--	--	<0.001	<0.003	0.006	<0.01	<0.005
JULY 22,1982: FINAL EFFLUENT	<0.05	0.65	0.006	0.0004	0.003	0.002	0.013	--	--	--	0.005	0.006	0.050	0.03	<0.005
MILL INTAKE WATER	<0.05	0.06	<0.001	<0.0002	<0.001	<0.001	0.003	--	--	--	<0.001	<0.003	0.008	<0.01	<0.005
JULY 23,1982: FINAL EFFLUENT	<0.05	--	0.002	--	--	--	--	--	--	--	--	--	--	0.03	<0.005
MILL INTAKE WATER	<0.05	0.04	<0.001	<0.0002	<0.001	<0.001	0.004	--	--	--	<0.001	<0.003	0.007	<0.01	<0.005

-- -NOT AVAILABLE

(1) -CONCENTRATIONS IN UG/L = PPB

< -LESS THAN

TABLE:22 INORGANIC TRACE CONTAMINANTS IN BOISE CASCADE CANADA LIMITED,
FORT FRANCES, EFFLUENTS.

CONCENTRATIONS OF INORGANIC TRACE CONTAMINANTS (MG/L = PPM)															
DATE SAMPLED/ SAMPLE DESCRIPTION	(1) M E R C U R Y	A L U M I N U M	A R S E N I C	C A D M I U M	C O B A L T	C H R O M I U M	C O P P E R	I R O N	M A N G A N E S E	M O L Y B D E N U M	N I C K E L	L E A D	Z I N C	H Y D R O P H E N O L	C Y A N I D E
JULY 13,1982:															
FINAL EFFLUENT	<0.05	0.55	<0.001	<0.005	<0.02	0.05	0.01	2.0	0.51	<0.02	<0.02	<0.03	0.09	0.81	<0.005
SECONDARY LAGOON INFLUENT	<0.05	0.40	<0.001	<0.005	<0.02	0.06	0.01	2.5	0.56	<0.02	<0.02	<0.03	0.12	9.00	<0.005
SECONDARY LAGOON EFFLUENT	<0.05	0.70	<0.001	<0.005	<0.02	0.07	0.10	2.5	0.71	<0.02	<0.02	<0.03	0.11	--	<0.005

-- -NOT AVAILABLE

(1) -CONCENTRATIONS IN UG/L = PPB

< -LESS THAN

TABLE:23 INORGANIC TRACE CONTAMINANTS IN DOMTAR PACKAGING/KRAFT PAPER
AND BOARD DIVISION RED ROCK MILL, EFFLUENTS AND MILL INTAKE WATER.

CONCENTRATIONS OF INORGANIC TRACE CONTAMINANTS (MG/L = PPM)															
DATE SAMPLED/ SAMPLE DESCRIPTION	(1) M E R C U R Y	A L U M I N U M	A R S E N I C	C A D M I U M	C O B A L T	C H R O M I U M	C O P P E R	I R O N	M A N G A N E S E	M O L Y B D E N U M	N I C K E L	L E A D	Z I N C	H Y D R O P H E I N D E	C Y A N I D E
JUNE 14,1982: FINAL EFFLUENT *	0.39	4.0	<0.001	<0.0050	<0.02	0.030	<0.020	0.63	0.27	--	<0.020	0.060	.050	<0.02	<0.005
JULY 5,1982: WOODROOM EFFLUENT	0.35	170.0	0.005	<0.0050	<0.02	0.230	0.050	34.00	1.60	0.03	<0.020	0.030	.320	0.61	<0.005
ALUM UNTREATED	0.16	4.9	0.006	<0.0050	<0.02	0.230	0.040	19.00	1.80	0.03	<0.020	0.070	.310	0.55	<0.005
ALUM TREATED															
JULY 17,1983: FINAL EFFLUENT *	<0.05	4.4	0.001	0.0003	.001	0.100	0.015	0.53	--	--	0.003	<0.003	.033	.012	<0.001
MILL INTAKE WATER	<0.05	0.1	0.001	<0.0002	<.001	0.006	0.004	0.29	--	--	<0.001	<0.003	.009	<.001	<0.001
JULY 18,1983: FINAL EFFLUENT *	<0.05	3.8	<.001	0.0003	.001	0.006	0.011	0.46	--	--	0.003	<0.003	.028	.019	<0.001
MILL INTAKE WATER	<0.05	0.2	<.001	<0.0002	<.001	<0.001	0.007	0.16	--	--	0.001	<0.003	.012	<.001	<0.001
JULY 19,1983: FINAL EFFLUENT *	<0.05	3.4	.001	<0.0002	.001	0.006	0.015	0.42	--	--	0.001	<0.003	.025	.007	<0.001
MILL INTAKE WATER	<0.05	0.1	<.001	<0.0002	<.001	0.001	0.004	0.16	--	--	<0.001	<0.003	.009	<.001	<0.001
JULY 20,1983: FINAL EFFLUENT *	<0.05	3.8	<.001	0.0004	.001	0.006	0.015	0.56	--	--	0.003	<0.003	.027	.082	<0.001
MILL INTAKE WATER	<0.05	0.1	<.001	<0.0002	<.001	<0.001	0.006	0.14	--	--	0.001	<0.003	.011	<.001	<0.001
JULY 21,1983: FINAL EFFLUENT *	<0.05	3.8	--	0.0004	.001	0.006	0.016	0.47	--	--	0.003	<0.003	.037	.091	<0.001
MILL INTAKE WATER	<0.05	0.1	--	<0.0002	<.001	<0.001	0.002	0.16	--	--	<0.001	<0.003	.008	<.001	<0.001

ND -NOT DETECTED

-- -NOT AVAILABLE

(1) -CONCENTRATIONS IN UG/L = PPB

< -LESS THAN

* NOTE: Mill effluent samples from Domtar Packaging also contained
effluent from the Red Rock Water Pollution Control Plant

TABLE:24 INORGANIC TRACE CONTAMINANTS IN GREAT LAKES FOREST PRODUCTS LIMITED, DRYDEN, EFFLUENT.

CONCENTRATIONS OF INORGANIC TRACE CONTAMINANTS (MG/L = PPM)															
DATE SAMPLED/ SAMPLE DESCRIPTION	(1) M E R C U R Y	A L U M I N U M	A R S E N I C	C A D M I U M	C O B A L T	C H R O M I U M	C O P P E R	I R O N	M A N G A N E S E	M O L Y B D E N U M	N I C K E L	L E A D	Z I N C	H Y D R O P H E N I D E	C Y A N I D E
AUGUST 23,1982: FINAL EFFLUENT	<0.05	1.4	<0.001	<0.005	<0.02	0.21	0.01	2.4	0.30	<0.05	0.05	<0.03	0.06	0.10	<0.005

(1) -CONCENTRATIONS IN UG/L = PPB

< -LESS THAN

TABLE:25 INORGANIC TRACE CONTAMINANTS IN GREAT LAKES FOREST PRODUCTS LIMITED, THUNDER BAY, EFFLUENT.

CONCENTRATIONS OF INORGANIC TRACE CONTAMINANTS (MG/L = PPM)															
DATE SAMPLED/ SAMPLE DESCRIPTION	(1) M E R C U R Y	A L U M I N U M	A R S E N I C	C A D M I U M	C O B A L T	C H R O M I U M	C O P P E R	I R O N	M A N G A N E S E	M O L Y B D E N U M	N I C K E L	L E A D	Z I N C	H Y D R O P H E N I D E	C Y A N I D E
JUNE 8,1982: FINAL EFFLUENT	0.27	13.0	<0.001	<0.005	<0.02	0.10	0.03	2.5	0.09	--	<0.02	<0.03	0.13	--	<0.005

-- -NOT AVAILABLE

(1) -CONCENTRATIONS IN UG/L = PPB

< -LESS THAN

TABLE:26 INORGANIC TRACE CONTAMINANTS IN JAMES RIVER MARATHON LTD.,
(FORMERLY: AMERICAN CAN CANADA INC.), EFFLUENTS.

CONCENTRATIONS OF INORGANIC TRACE CONTAMINANTS (MG/L = PPM)															
DATE SAMPLED/ SAMPLE DESCRIPTION	(1) M E R C U R Y	A L U M I N U M	A R S E N I C	C A D M I U M	C O B A L T	C H R O M I U M	C O P P E R	I R O N	M A N G A N E S E	M O L Y B D E N U M	N I C K E L	L E A D	Z I N C	H Y D R O P H E N I C	C Y A N I D E
JUNE 22,1982: FINAL EFFLUENT	0.15	0.45	<0.001	<0.005	<0.02	0.13	0.02	2.7	0.62	0.03	0.02	<0.03	0.16	0.46	0.045
MAIN MILL EFFLUENT	--	--	--	--	--	--	--	--	--	--	--	--	--	211.00	0.008
ACIDIC SEWER EFFLUENT	--	--	--	--	--	--	--	--	--	--	--	--	--	0.44	--
ALKALINE SEWER EFFLUENT	--	--	--	--	--	--	--	--	--	--	--	--	--	10.00	0.040
AUGUST 16,1982: FINAL EFFLUENT	0.20	0.23	<0.001	<0.005	<0.02	0.07	0.01	1.4	0.35	--	<0.02	<0.03	0.07	0.06	<0.005

-- -NOT AVAILABLE

(1) -CONCENTRATIONS IN UG/L = PPB

< -LESS THAN

TABLE:27 INORGANIC TRACE CONTAMINANTS IN KIMBERLY-CLARK OF CANADA LIMITED, TERRACE BAY, EFFLUENTS AND MILL INTAKE WATER.

CONCENTRATIONS OF INORGANIC TRACE CONTAMINANTS (MG/L = PPM)															
DATE SAMPLED/ SAMPLE DESCRIPTION	(1) M E R C U R Y	A L U M I N U M	A R S E N I C	C A D M I U M	C O B A L T	C H R O M I U M	C O P P E R	I R O N	M A N G A N E S E	M O L Y B D E N U M	N I C K E L	L E A D	Z I N C	H Y D R O P H E I N D E	C Y A N I D E
AUGUST 10,1982: FINAL EFFLUENT	<0.05	0.39	<0.001	<0.0050	<0.02	0.060	0.010	2.10	0.47	<0.05	0.03	<0.030	0.070	0.03	<0.005
JULY 10,1983: FINAL EFFLUENT	<0.05	0.43	--	<0.0050	--	<0.020	0.020	0.64	--	--	--	<0.030	<0.010	0.013	--
MILL INTAKE WATER	<0.05	<0.01	--	0.0010	--	0.002	0.003	0.04	--	--	--	0.003	0.005	<0.001	--
JULY 11,1983: FINAL EFFLUENT	0.19	0.62	--	0.0050	--	<0.020	<0.010	0.82	--	--	--	<0.030	0.055	0.017	--
MILL INTAKE WATER	0.07	0.03	--	0.0005	--	0.002	0.003	0.04	--	--	--	<0.003	0.004	<0.001	--
JULY 12,1983: FINAL EFFLUENT	<0.05	0.76	--	<0.0050	--	<0.020	<0.010	0.94	--	--	--	<0.030	0.075	0.002	--
MILL INTAKE WATER	<0.05	0.02	--	0.0005	--	<0.002	0.004	0.05	--	--	--	<0.003	0.003	<0.001	--
JULY 13,1983: FINAL EFFLUENT	0.12	0.66	--	0.0050	--	<0.020	<0.010	0.64	--	--	--	<0.030	0.075	0.004	--
MILL INTAKE WATER	0.06	0.02	--	0.0015	--	<0.002	0.011	0.04	--	--	--	0.006	0.004	<0.001	--
JULY 14,1983: FINAL EFFLUENT	0.05	0.66	--	0.0050	--	0.030	<0.010	0.62	--	--	--	<0.030	0.065	0.009	--
MILL INTAKE WATER	<0.05	0.02	--	<0.0015	--	0.003	0.004	0.05	--	--	--	<0.003	0.004	<0.001	--

ND -NOT DETECTED

-- -NOT AVAILABLE

(1) -CONCENTRATIONS IN UG/L = PPB

< -LESS THAN

TABLE:28 FATTY, AROMATIC AND RESIN ACIDS IN ABITIBI PRICE FINE PAPERS,
PORT ARTHUR DIVISION, EFFLUENTS.

CONCENTRATIONS (UG/L = PPB) OF FATTY, AROMATIC AND RESIN ACIDS																			
	FATTY ACIDS									AROMATIC ACIDS			RESIN ACIDS						
DATE SAMPLED/ SAMPLE DESCRIPTION	C A P R I C	L A U R I C	M Y R I S T I C	P A L M I T I C	S T E A R I C	O L E I C	L I N O L E I C	L I N O L E N I C	A R A C H I D I C	B E N Z O I C	S A L I C Y L I C	P H T H A L I C	P I M A R I C	S A N D P A I R M A A C R O I - C	L E V O P I M A R I C	I S O P I M A R I C	N E O A B I E T I C	A B I E T I C	D E A H B Y I D E R T O I - C
JULY 7,1982: GROUNDWOOD EFFLUENT	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	698	ND	ND	1403	ND	606	86
PAPER MILL EFFLUENT	ND	ND	ND	291	421	70	239	ND	ND	ND	ND	ND	59	ND	149	ND	ND	736	ND
AUGUST 4,1982: FINAL EFFLUENT	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
DETECTION LIMIT	10	10	10	10	10	10	10	10	10	10	10	10	40	40	40	40	40	40	40
ND -NOT DETECTED																			

TABLE:29 FATTY, AROMATIC AND RESIN ACIDS IN ABITIBI PRICE INC.,
FORT WILLIAM DIVISION, EFFLUENTS.

CONCENTRATIONS (UG/L = PPB) OF FATTY, AROMATIC AND RESIN ACIDS																			
DATE SAMPLED/ SAMPLE DESCRIPTION	FATTY ACIDS									AROMATIC ACIDS			RESIN ACIDS						
	C A P R I C	L A U R I C	M Y R I S T I C	P A L M I T I C	S T E A R I C	O L E I C	L I N O L E I C	L I N O L E N I C	A R A C H I D I C	B E N Z O I C	S A L I C Y L I C	P H T H A L I C	P I M A R I C	S A N D P A I R M A A C R O I C	L E V O P I M A R I C	I S O P I M A R I C	N E O A B I E T I C	A B I E T I C	D E H B Y D E R T O I C
JULY 21,1982: COMBINED FINAL EFFLUENT*	ND	ND	ND	318	ND	1244	4801	1080	ND	ND	ND	ND	1795	3183	2612	5224	23239	15810	1187
FINAL EFFLUENT**	ND	ND	ND	ND	172	213	1176	220	ND	ND	ND	ND	110	585	411	600	2052	2372	545
WOODROOM EFFLUENT	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	110	195	114	ND	ND	290	ND
SCMP EFFLUENT	ND	ND	ND	214	129	1524	7058	1588	ND	ND	ND	ND	770	3640	2742	4640	23040	15301	1309
DETECTION LIMITS	10	10	10	10	10	10	10	10	10	10	10	10	40	40	40	40	40	40	40

ND -NOT DETECTED

* -NO.1 & NO.2 LAGOON EFFLUENTS AND WOODROOM EFFLUENT

** -NO.1 & NO.2 LAGOON EFFLUENTS

SCMP-SEMI CHEMICAL MECHANICAL PULPING

TABLE:30 FATTY, AROMATIC AND RESIN ACIDS IN ABITIBI PRICE INC.,
THUNDER BAY DIVISION, EFFLUENTS AND MILL INTAKE WATER.

CONCENTRATIONS (UG/L = PPB) OF FATTY, AROMATIC AND RESIN ACIDS																			
	FATTY ACIDS									AROMATIC ACIDS			RESIN ACIDS						
DATE SAMPLED/ SAMPLE DESCRIPTION	C A P R I C	L A U R I C	M Y R I S T I C	P A L M I T I C	S T E A R I C	O L E I C	L I N O L E I C	L I N O L E I C	A R A C H I C	B E N Z O I C	S A L I C Y L I C	P H T H A L I C	P I M A R I C	S A N D P A I R M C -C	L E V O P I M A R I C	I S O P I M A R I C	N E O P A B I E T I C	D E A H B Y D E R T O I -C	
JUNE 3,1982: FINAL EFFLUENT	ND	ND	ND	84	ND	229	646	ND	ND	ND	ND	ND	65	199	355	483	332	3606	488
JUNE 16,1982: FINAL EFFLUENT	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	233	88
JULY 21,1982: FINAL EFFLUENT	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
MILL INTAKE WATER	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
JULY 22,1982: FINAL EFFLUENT	ND	ND	ND	134	ND	297	1310	236	ND	ND	ND	ND	758	747	998	1701	8066	5509	459
JULY 23,1982: FINAL EFFLUENT	ND	ND	ND	108	ND	254	1102	212	ND	ND	ND	ND	611	1227	ND	1377	7062	4357	323
DETECTION LIMIT	10	10	10	10	10	10	10	10	10	10	10	10	40	40	40	40	40	40	40

ND -NOT DETECTED

TABLE:31 FATTY, AROMATIC AND RESIN ACIDS IN BOISE CASCADE CANADA LIMITED
FORT FRANCES, EFFLUENTS.

CONCENTRATIONS (UG/L = PPB) OF FATTY, AROMATIC AND RESIN ACIDS																			
DATE SAMPLED/ SAMPLE DESCRIPTION	FATTY ACIDS									AROMATIC ACIDS			RESIN ACIDS						
	C A P R I C	L A U R I C	M Y R I S T I C	P A L M I T I C	S T E A R I C	O L E I C	L I N O L E I C	L I N O L E N I C	A R A C H I D I C	B E N Z O I C	S A L I C Y L I C	P H T H A L I C	P I M A R I C	S A N D P A I R M A A C R O I - C	L E V O P I M A R I C	I S O P I M A R I C	N E O A B I E T I C	A B I E T I C	D E A H B Y I D E R T O I - C
JULY 13,1982: FINAL EFFLUENT	ND	ND	ND	116	ND	273	3219	204	ND	ND	ND	ND	273	388	545	875	2766	2698	289
SECONDARY LAGOON INFLUENT	ND	ND	ND	61	77	226	898	ND	ND	ND	ND	ND	342	525	581	622	2054	2645	282
SECONDARY LAGOON EFFLUENT	ND	ND	101	56	ND	122	ND	ND	ND	ND	ND	ND	252	298	472	ND	ND	779	104
DETECTION LIMIT	10	10	10	10	10	10	10	10	10	10	10	10	40	40	40	40	40	40	40
ND -NOT DETECTED																			

TABLE:32 FATTY, AROMATIC AND RESIN ACIDS IN DOMTAR PACKAGING/KRAFT
PAPER AND BOARD DIVISION RED ROCK MILL, EFFLUENTS AND MILL INTAKE WATER.

CONCENTRATIONS (UG/L = PPB) OF FATTY, AROMATIC AND RESIN ACIDS																				
		FATTY ACIDS								AROMATIC ACIDS			RESIN ACIDS							
DATE SAMPLED/ SAMPLE DESCRIPTION	C A P R I C	L A U R I C	M Y R I S T I C	P A L M I T I C	S T E A R I C	O L E F I C	L I N O L E I C	L I N O L E N I C	A R A C H I D I C	B E N Z O I C	S A L I C Y L I C	P H T H A L I C	P I M A R I C	S A N D P A I R M C O I -C	L E V O P I M A R I C	I S O P H T H A R I C	N E O P H T H A R I C	A B I E T I C	D E A H B Y D E R T O I -C	
JUNE 14,1982: FINAL EFFLUENT*	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	130	154	ND	136	ND	92	ND
JULY 5,1982: WOODROOM EFFLUENT:																				
ALUM UNTREATED	ND	ND	ND	ND	ND	542	2356	140	ND	452	ND	ND		ND	1238	1166	2128	5470	7522	909
ALUM TREATED	ND	ND	ND	ND	ND	868	3472	187	ND	664	ND	ND		349	1650	1666	2619	9846	15044	1111
JULY 17,1983: FINAL EFFLUENT*	2	8	5	48	14	64	137	2	4	85	22	ND		93	43	74	130	ND	392	273
MILL INTAKE WATER	2	ND	1	5	3	2	3	ND	ND	11	ND	ND		5	ND	ND	2	2	ND	2
JULY 18,1983: FINAL EFFLUENT*	ND	ND	7	28	16	63	75	2	13	ND	39	ND		199	135	187	361	ND	1800	563
MILL INTAKE WATER	ND	ND	ND	3	ND	ND	ND	ND	ND	ND	ND	ND		ND	ND	ND	ND	ND	ND	ND
JULY 19,1983: FINAL EFFLUENT*	6	ND	6	17	11	37	ND	4	12	ND	48	ND		147	101	135	257	ND	1210	476
MILL INTAKE WATER	2	ND	ND	3	ND	ND	ND	ND	ND	ND	ND	ND		5	ND	ND	ND	ND	ND	ND
JULY 20,1983: FINAL EFFLUENT*	7	2	9	106	25	ND	ND	34	16	3	50	16		156	106	61	282	ND	1020	681
MILL INTAKE WATER	ND	ND	1	12	13	ND	ND	ND	ND	ND	ND	ND		1	ND	ND	ND	ND	ND	1
JULY 21,1983: FINAL EFFLUENT*	7	12	11	89	18	ND	6	17	ND	5	42	ND		161	91	ND	332	ND	189	657
MILL INTAKE WATER	ND	ND	ND	1	ND	ND	ND	ND	ND	ND	ND	ND		ND	ND	ND	ND	2	2	ND
DETECTION LIMIT (1982)	10	10	10	10	10	10	10	10	10	10	10	10		40	40	40	40	40	40	40
DETECTION LIMIT (1983)	1	1	1	1	2	2	4	2	3	2	2	2		1	1	1	1	1	1	1
ND -NOT DETECTED																				

* NOTE: Mill effluent samples from Domtar Packaging also contained
effluent from the Red Rock Water Pollution Control Plant

TABLE:33 FATTY, AROMATIC AND RESIN ACIDS IN GREAT LAKES FOREST PRODUCTS, LIMITED, DRYDEN, EFFLUENT.

CONCENTRATIONS (UG/L = PPB) OF FATTY, AROMATIC AND RESIN ACIDS																			
	FATTY ACIDS									AROMATIC ACIDS			RESIN ACIDS						
DATE SAMPLED/ SAMPLE DESCRIPTION	C A P R I C	L A U R I C	M Y R I S T I C	P A L M I T I C	S T E A R I C	O L E I C	L I N O L E I C	L I N O L E N I C	A R A C H I D I C	B E N Z O I C	S A L I C Y L I C	P H T H A L I C	P I M A R I C	S A N D P A I R M A A C R O I C	L E V O P I M A R I C	I S O P I M A R I C	N E O P A B I E T I C	A B I E T I C	D E A H B Y I D E R T O I C
AUGUST 23,1982: FINAL EFFLUENT	ND	ND	ND	ND	ND	33	ND	24	ND	ND	ND	ND	118	315	197	301	142	1354	137
DETECTION LIMIT	10	10	10	10	10	10	10	10	10	10	10	10	40	40	40	40	40	40	40
ND -NOT DETECTED																			

TABLE:34 FATTY, AROMATIC AND RESIN ACIDS IN GREAT LAKES FOREST PRODUCTS LIMITED, THUNDER BAY, EFFLUENT.

CONCENTRATIONS (UG/L = PPB) OF FATTY, AROMATIC AND RESIN ACIDS																				
		FATTY ACIDS									AROMATIC ACIDS			RESIN ACIDS						
DATE SAMPLED/ SAMPLE DESCRIPTION	C A P R I C	L A U R I C	M Y R I S T I C	P A L M I T I C	S T E A R I C	O L E I C	L I N O L E I C	L I N O L E I C	A R A C H I C	B E N Z O I C	S A L I C Y L I C	P H T H A L I C	P I M A R I C	S A N D P A I R M A A C R O I C	L E V O P I M A R I C	I S O P I M A R I C	N E O P A B I E T I C	A B I E T I C	D E A H B Y I D E R T O I C	
JUNE 8,1982: FINAL EFFLUENT	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	103	83	ND	ND	232	ND
DETECTION LIMIT	10	10	10	10	10	10	10	10	10	10	10	10	10	40	40	40	40	40	40	40
ND -NOT DETECTED																				

TABLE:35 FATTY, AROMATIC AND RESIN ACIDS IN JAMES RIVER MARATHON LTD.,
(FORMERLY: AMERICAN CAN CANADA INC.), EFFLUENTS.

CONCENTRATIONS (UG/L = PPB) OF FATTY, AROMATIC AND RESIN ACIDS																			
	FATTY ACIDS									AROMATIC ACIDS			RESIN ACIDS						
DATE SAMPLED/ SAMPLE DESCRIPTION	C A P R I C	L A U R I C	M Y R I S T I C	P A L M I T I C	S T E A R I C	O L E F I C	L I N O L E I C	L I N O L E I C	A R A C H I D I C	B E N Z O I C	S A L I C I C	P H T H A L I C	P I M A R I C	S A N D P A I R M C -C	L E V O P I M A R I C	I S O P I M A R I C	N E O A B I T I C	A B I T I C	D E A H B Y I D E R T O I C
JUNE 22,1982: FINAL EFFLUENT	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	131	ND	ND	123	ND	48	ND
MAIN MILL EFFLUENT	ND	ND	ND	ND	ND	1406	3333	ND	ND	ND	ND	ND	419	ND	960	393	656	5740	485
ACIDIC SEWER EFFLUENT	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
ALKALINE SEWER EFFLUENT	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	175	154	ND	ND	ND	241	ND
AUGUST 16,1982: FINAL EFFLUENT	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	200	ND	823	145
DETECTION LIMIT	10	10	10	10	10	10	10	10	10	10	10	10	40	40	40	40	40	40	40
ND -NOT DETECTED																			

TABLE:36 FATTY, AROMATIC AND RESIN ACIDS IN KIMBERLY-CLARK OF CANADA LTD.,
TERRACE BAY, EFFLUENTS AND MILL INTAKE WATER.

CONCENTRATIONS (UG/L = PPB) OF FATTY, AROMATIC AND RESIN ACIDS																			
DATE SAMPLED/ SAMPLE DESCRIPTION	FATTY ACIDS									AROMATIC ACIDS			RESIN ACIDS						
	C A P R I C	L A U R I C	M Y R I S T I C	P A L M I T I C	S T E A R I C	O L E F I C	L I N O L E N I C	L I N O L E N I C	A R A C H I D I C	B E N Z O I C	S A L I C Y L I C	P H T H A L I C	P I M A R I C	S A N D P A I R M A A C R O I -C	L E V O P I M A R R I C	I S O P I M A R R I C	N E O P A B I E T I C	A B I E T I C	D E A H B Y I D E R T O I -C
AUGUST 10,1982: FINAL EFFLUENT	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
JULY 10,1983: FINAL EFFLUENT	6	2	3	80	10	66	222	2	ND	232	37	23	231	133	ND	274	ND	805	550
MILL INTAKE WATER	ND	ND	ND	4	ND	ND	4	ND	ND	3	ND	ND	5	ND	ND	1	ND	ND	2
JULY 11,1983: FINAL EFFLUENT	--	51	22	64	6	51	168	ND	6	--	--	ND	197	275	125	365	ND	1300	523
MILL INTAKE WATER	ND	ND	ND	1	ND	ND	ND	ND	ND	6	ND	ND	5	5	ND	ND	2	ND	1
JULY 12,1983: FINAL EFFLUENT	5	4	10	89	24	53	398	5	8	301	8	23	120	61	305	102	ND	404	236
MILL INTAKE WATER	ND	ND	ND	3	2	ND	6	ND	ND	16	ND	ND	6	ND	ND	1	1	ND	1
JULY 13,1983: FINAL EFFLUENT	7	9	20	122	28	52	485	7	17	234	25	23	170	133	560	194	ND	756	333
MILL INTAKE WATER	ND	ND	ND	3	ND	ND	ND	ND	ND	17	ND	ND	5	ND	ND	ND	ND	ND	4
JULY 14,1983: FINAL EFFLUENT	5	22	4	18	10	8	60	ND	ND	266	28	ND	292	106	227	384	ND	278	760
MILL INTAKE WATER	ND	ND	1	4	ND	ND	ND	ND	ND	4	ND	ND	ND	ND	ND	ND	ND	ND	ND
DETECTION LIMIT(1982)	10	10	10	10	10	10	10	10	10	10	10	10	40	40	40	40	40	40	40
DETECTION LIMIT(1983)	1	1	1	1	2	2	4	2	3	2	2	2	1	1	1	1	1	1	1
ND -NOT DETECTED																			

ND -NOT DETECTED

TABLE:37 SPECIFIC PHENOLIC COMPOUNDS IN ABITIBI PRICE FINE PAPERS,
PORT ARTHUR DIVISION, EFFLUENTS.

CONCENTRATIONS (UG/L = PPB) OF SPECIFIC PHENOLIC COMPOUNDS																			
DATE SAMPLED/ SAMPLE DESCRIPTION	P H E N O L	V A N I L I N	H O M O V A N I L A L C I I C D	G U A I A C O L	S Y R I N G A L D E H Y D E	A C E T O V A N I L O N	V A N I L A L C I I C D	A C E T O S Y R I N G O N E	2 , 5 - X Y L E N O L	P - C R E O L	M - P - C H C L R O E S - L	2 - C P	4 - C P	2 - D C P	2 , 4 - T C P	2 , 4 - T C P	2 , 3 , 4 - T C P	2 , 4 - T C P	P C P
JULY 7,1982: GROUNDWOOD EFFLUENT	40	5	21	12	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
PAPER MILL EFFLUENT	17	5	ND	17	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
AUGUST 4,1982: FINAL EFFLUENT	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
DETECTION LIMIT	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5
ND -NOT DETECTED CP -CHLOROPHENOL DCP -DICHLOROPHENOL TCP -TRICHLOROPHENOL TTCP-TETRACHLOROPHENOL PCP -PENTACHLOROPHENOL																			

TABLE:38 SPECIFIC PHENOLIC COMPOUNDS IN ABITIBI PRICE INC.,
FORT WILLIAM DIVISION, EFFLUENTS.

CONCENTRATIONS (UG/L = PPB) OF SPECIFIC PHENOLIC COMPOUNDS																			
DATE SAMPLED/ SAMPLE DESCRIPTION	P H E N O L	V A N I L I N	H O M O V A N I L A I I C D	G U A I A C O L	S Y R I N G A L D E H Y D R O N	A C E T O V A N I L O N	V A N I L A I I C D	A C E T O S Y R I N G O N	2 , 5 - X Y E N O L	P - C R E O L	M - P - C - H C L R O E O O - L	2 , 4 - C P	2 , 4 - C P	2 , 4 - C P	2 , 4 - C P	2 , 4 - C P	2 , 4 - C P	2 , 4 - C P	2 , 4 - C P
JULY 21,1982: COMBINED FINAL EFFLUENT*	ND	302	ND	ND	ND	94	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
FINAL EFFLUENT**	ND	288	ND	ND	ND	58	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
WOODROOM EFFLUENT	ND	162	540	576	ND	171	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
SCMP EFFLUENT	ND	178	ND	ND	ND	130	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
DETECTION LIMIT	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5

ND -NOT DETECTED

* -NO.1 & NO.2 LAGOON EFFLUENTS AND WOODROOM EFFLUENT

** -NO.1 & NO.2 LAGOON EFFLUENTS

SCMP-SEMI CHEMICAL MECHANICAL PULPING

CP -CHLOROPHENOL

DCP -DICHLOROPHENOL

TCP -TRICHLOROPHENOL

TTCP-TETRACHLOROPHENOL

PCP -PENTACHLOROPHENOL

TABLE:39 SPECIFIC PHENOLIC COMPOUNDS IN ABITIBI PRICE INC.,
THUNDER BAY DIVISION, EFFLUENTS AND MILL INTAKE WATER.

CONCENTRATIONS (UG/L = PPB) OF SPECIFIC PHENOLIC COMPOUNDS																			
DATE SAMPLED/ SAMPLE DESCRIPTION	P H E N O L	V A N I L I N	H O M O V A N I L A C D	G U A I A C O L	S Y R I N G A L D E H Y D E	A C E T O V A N I L O N	V A N I L A C D	A C E T O S Y R I N G O N E	2 , 5 - X Y L E N O L	P - C R E S O L	M - P C - H C R O E O O - L	2 - C P	4 - C P	2 , 4 - D C P	2 , 4 - T C P	2 , 4 - T C P	2 , 3 , 4 - T T C P	2 , 4 - T T C P	P C P
JUNE 3,1982: FINAL EFFLUENT	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--
JUNE 16,1982: FINAL EFFLUENT	ND	122	90	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
JULY 21,1982: FINAL EFFLUENT	2600	140	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
MILL INTAKE WATER	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
JULY 22,1982: FINAL EFFLUENT	2400	130	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
JULY 23,1982: FINAL EFFLUENT	50	35	ND	140	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
DETECTION LIMIT	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5
ND -NOT DETECTED -- -NOT AVAILABLE CP -CHLOROPHENOL DCP -DICHLOROPHENOL TCP -TRICHLOROPHENOL TTCP-TETRACHLOROPHENOL PCP -PENTACHLOROPHENOL																			

ND -NOT DETECTED
-- -NOT AVAILABLE
CP -CHLOROPHENOL
DCP -DICHLOROPHENOL
TCP -TRICHLOROPHENOL
TTCP-TETRACHLOROPHENOL
PCP -PENTACHLOROPHENOL

TABLE:40 SPECIFIC PHENOLIC COMPOUNDS IN BOISE CASCADE CANADA LIMITED,
FORT FRANCES, EFFLUENTS.

CONCENTRATIONS (UG/L = PPB) OF SPECIFIC PHENOLIC COMPOUNDS																			
DATE SAMPLED/ SAMPLE DESCRIPTION	P H E N O L	V A N I L I N	H O M O V A N I L A L C D	G U A I A C O L	S Y R I N G A L D E H Y D R O N	A C E T O V A N I L O N	V A N I L A L C D	A C E T O S Y R I N G O N	2 , 5 - X Y L E N O L	P - C H C R E O O L	M - P - C H C R O O L	2 4 - C P	4 - C P	2 , 4 5 - T C P	2 , 4 5 - T C P	2 , 3 4 5 - T C P	2 , 3 4 5 - T C P	2 , 3 4 5 - T C P	2 , 3 4 5 - T C P
JULY 13,1982: FINAL EFFLUENT	ND	ND	ND	27	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
SECONDARY LAGOON INFLUENT	ND	880	ND	1310	ND	173	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
SECONDARY LAGOON EFFLUENT	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
DETECTION LIMIT	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5

ND -NOT DETECTED
 CP -CHLOROPHENOL
 DCP -DICHLOROPHENOL
 TCP -TRICHLOROPHENOL
 TTCP-TETRACHLOROPHENOL
 PCP -PENTACHLOROPHENOL

TABLE:41 SPECIFIC PHENOLIC COMPOUNDS IN DOMTAR PACKAGING/KRAFT PAPER
AND BOARD DIVISION RED ROCK MILL, EFFLUENTS AND MILL INTAKE WATER.

		CONCENTRATIONS (UG/L = PPB) OF SPECIFIC PHENOLIC COMPOUNDS																	
DATE SAMPLED/ SAMPLE DESCRIPTION	P H E N O L	V A N I L I N	H O M O V A N I L A I C D	G U A I A C O L	S Y R I N G A L D E H Y D E	A C E T O V A N I L O N	V A N I L A I C D	A C E T O S Y R I N G O N E	2 , 5 - X Y L E N O L	P - C R E S O L	M - P - C H C R O O - L	2 - C P	4 - C P	2 - D C P	2 - T C P	2 - T C P	2 - T C P	2 - T C P	2 - T C P
JUNE 14,1982: FINAL EFFLUENT *	ND	216	180	1250	ND	64	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
JULY 5,1982: WOODROOM EFFLUENT	13000	400	ND	2600	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
ALUM UNTREATED	17000	600	ND	2800	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
JULY 17,1983: FINAL EFFLUENT *	ND	13	ND	207	ND	6	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
MILL INTAKE WATER	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
JULY 18,1983: FINAL EFFLUENT *	ND	44	ND	1100	ND	33	ND	14	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
MILL INTAKE WATER	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
JULY 19,1983: FINAL EFFLUENT *	ND	29	ND	945	ND	38	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
MILL INTAKE WATER	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
JULY 20,1983: FINAL EFFLUENT *	ND	43	ND	540	ND	75	ND	19	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
MILL INTAKE WATER	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
JULY 21,1983: FINAL EFFLUENT *	ND	43	ND	1120	ND	52	ND	17	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
MILL INTAKE WATER	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
DETECTION LIMIT	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5

ND -NOT DETECTED
-- -NOT AVAILABLE
CP -CHLOROPHENOL
DCP -DICHLOROPHENOL
P -TRICHLOROPHENOL
TCP-TETRACHLOROPHENOL
PCP -PENTACHLOROPHENOL

* NOTE: Mill effluent samples from Domtar Packaging also contained effluent from the Red Rock Water Pollution Control Plant

TABLE:42 SPECIFIC PHENOLIC COMPOUNDS IN GREAT LAKES FOREST PRODUCTS LIMITED,
 DRYDEN, EFFLUENT.

CONCENTRATIONS (UG/L = PPB) OF SPECIFIC PHENOLIC COMPOUNDS																			
DATE SAMPLED/ SAMPLE DESCRIPTION	P H E N O L	V A N I L I N	H O M O V A N I L A L C D	G U A I A C O L	S Y R I N G A L D E H Y D E	A C E T O V A N I L O N	V A N I L A L C D	A C E T O S Y R I N G O N E	2 , 5 - X Y L E N O L	P - C R E O L	M - P C - H C L R O O - L	2 - C P	4 - C P	2 , 4 - D C P	2 , 4 - T C P	2 , 4 - T C P	2 , 3 , 4 , 5 - T C P	2 , 4 , 5 - T C P	P C P
AUGUST 23,1982: FINAL EFFLUENT	ND	72	ND	378	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
DETECTION LIMIT	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5

ND -NOT DETECTED
 CP -CHLOROPHENOL
 DCP -DICHLOROPHENOL
 TCP -TRICHLOROPHENOL
 TTCP-TETRACHLOROPHENOL
 PCP -PENTACHLOROPHENOL

TABLE:43 SPECIFIC PHENOLIC COMPOUNDS IN GREAT LAKES FOREST PRODUCTS LIMITED,
THUNDER BAY, EFFLUENT.

CONCENTRATIONS (UG/L = PPB) OF SPECIFIC PHENOLIC COMPOUNDS																			
DATE SAMPLED/ SAMPLE DESCRIPTION	P H E N O L	V A N I L I N	H O M O V A N I L A L C I I C D	G U A I A C O L	S Y R I N G A L D E H Y D E	A C E T O V A N I L L O N	V A N I L A L C I I C D	A C E T O S Y R I N G O N E	2 , 5 - X Y L E N O L	P - C R E S O L	M - P - C H C R O O - L	2 , 4 - C P	4 - C P	2 , 4 - C P	2 , 4 - C P	2 , 4 - C P	2 , 3 , 4 - T T C P	2 , 4 - T T C P	P C P
JUNE 8,1982: FINAL EFFLUENT	ND	162	ND	1098	ND	288	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
DETECTION LIMIT	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5

ND -NOT DETECTED
CP -CHLOROPHENOL
DCP -DICHLOROPHENOL
TCP -TRICHLOROPHENOL
TTCP-TETRACHLOROPHENOL
PCP -PENTACHLOROPHENOL

TABLE:44 SPECIFIC PHENOLIC COMPOUNDS IN JAMES RIVER MARATHON LTD.,
(FORMERLY: AMERICAN CAN CANADA INC.), EFFLUENTS.

		CONCENTRATIONS (UG/L = PPB) OF SPECIFIC PHENOLIC COMPOUNDS																
DATE SAMPLED/ SAMPLE DESCRIPTION	P H E N O L	V A N I L N	H O M O V A N I L A C D	G U A I A C O L	S Y R I N G A L D E H Y D O N	A C E T O V A N I L O N	V A N I L A C D	A C E T O S Y R I N G O N E	2 , 5 - X Y L N O L	P - C R E S O L	M - P - C H C L R O O - L	2 - C P	4 - C P	2 , 4 - D C P	2 , 4 - T C P	2 , 4 - T C P	2 , 3 , 4 , 5 - T C P	P C P
JUNE 22,1982:																		
FINAL EFFLUENT	ND	ND	ND	11	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
MAIN MILL EFFLUENT	ND	1656	ND	9450	ND	900	720	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
ACIDIC SEWER EFFLUENT	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
ALKALINE SEWER EFFLUENT	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--
AUGUST 16,1982:																		
FINAL EFFLUENT	ND	144	ND	468	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
DETECTION LIMIT	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5

ND -NOT DETECTED
-- -NOT AVAILABLE
CP -CHLOROPHENOL
DCP -DICHLOROPHENOL
TCP -TRICHLOROPHENOL
TTCP-TETRACHLOROPHENOL
PCP -PENTACHLOROPHENOL

TABLE:45 SPECIFIC PHENOLIC COMPOUNDS IN KIMBERLY-CLARK OF CANADA LIMITED,
TERRACE BAY, EFFLUENT.

CONCENTRATIONS (UG/L = PPB) OF SPECIFIC PHENOLIC COMPOUNDS																			
DATE SAMPLED/ SAMPLE DESCRIPTION	P H E N O L	V A N I L I N	H O M O V A N I L A C D	G U A I A C O L	S Y R I N G A L D E H Y D E	A C E T O V A N I L O N	V A N I L A C D	A C E T O S Y R I N G O N E	2 , 5 - X Y L E N O L	P - C R E O L	M - P - C H C R O O L	2 - C P	4 - C P	2 , 4 - D C P	2 , 4 - T C P	2 , 4 - T C P	2 , 3 , 4 , 5 - T C P	2 , 4 , 5 - T C P	P C P
AUGUST 10,1982: FINAL EFFLUENT	ND	216	270	612	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
DETECTION LIMIT	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5
ND -NOT DETECTED CP -CHLOROPHENOL DCP -DICHLOROPHENOL TCP -TRICHLOROPHENOL TTCP-TETRACHLOROPHENOL PCP -PENTACHLOROPHENOL																			

TABLE:46 CHLOROPHENOL CONCENTRATIONS IN ABITIBI PRICE FINE PAPERS,
PORT ARTHUR DIVISION, EFFLUENTS AND MILL INTAKE WATER.

CONCENTRATIONS (NG/L = PPT) OF CHLOROPHENOLS						
				2	2	
				,	,	
				3	3	
	2	2	2	,	,	
	,	,	,	4	5	
	3	4	4	,	,	
	,	,	,	5	6	
	4	5	6	-	-	
DATE SAMPLED/	-	-	-	T	T	
SAMPLE DESCRIPTION	T	T	T	T	T	P
	C	C	C	C	C	C
	P	P	P	P	P	P
JULY 7, 1982:						
GROUNDWOOD EFFLUENT	ND	ND	ND	ND	ND	300
PAPER MILL EFFLUENT	ND	ND	ND	ND	ND	250
MILL INTAKE WATER	ND	ND	ND	ND	ND	ND
AUGUST 4, 1982:						
FINAL EFFLUENT	--	--	--	--	--	--
MILL INTAKE WATER	ND	ND	ND	ND	ND	ND
DETECTION LIMIT	100	50	50	50	50	50
ND -NOT DETECTED -- -NOT AVAILABLE TCP-TRICHLOROPHENOL TTCP-TETRACHLOROPHENOL PCP-PENTACHLOROPHENOL						

TABLE:47 CHLOROPHENOL CONCENTRATIONS IN ABITIBI PRICE INC.,
FORT WILLIAM DIVISION, EFFLUENTS AND MILL INTAKE WATER.

CONCENTRATIONS (NG/L = PPT) OF CHLOROPHENOLS						
DATE SAMPLED/ SAMPLE DESCRIPTION				2	2	
				,	,	
				3	3	
	2	2	2	,	,	
	,	,	,	4	5	
	3	4	4	,	,	
	,	,	,	5	6	
	4	5	6	-	-	
	-	-	-	T	T	
	T	T	T	T	T	P
	C	C	C	C	C	C
	P	P	P	P	P	P
JULY 21,1982:						
COMBINED FINAL						
EFFLUENT*	ND	ND	ND	ND	ND	100
FINAL EFFLUENT**	ND	ND	150	ND	ND	100
WOODROOM EFFLUENT	350	100	ND	ND	ND	200
SCMP EFFLUENT	ND	ND	ND	ND	ND	400
MILL INTAKE WATER	ND	ND	ND	ND	ND	ND
DETECTION LIMIT	100	50	50	50	50	50
ND -NOT DETECTED * -NO.1 & NO.2 LAGOON EFFLUENTS & WOODROOM EFFLUENT ** -NO.1 & NO.2 LAGOON EFFLUENTS SCMP-SEMI CHEMICAL MECHANICAL PULPING TCP-TRICHLOROPHENOL TTCP-TETRACHLOROPHENOL PCP-PENTACHLOROPHENOL						

TABLE:48 CHLOROPHENOL CONCENTRATIONS IN ABITIBI PRICE INC.,
THUNDER BAY DIVISION, EFFLUENTS AND MILL INTAKE WATER.

CONCENTRATIONS (NG/L = PPT) OF CHLOROPHENOLS						
DATE SAMPLED/ SAMPLE DESCRIPTION	2	2	2	2	2	P
				3	3	
	2	2	2	4	5	P
				4	5	
	3	4	4	5	6	P
				5	6	
	4	5	6	-	-	P
				T	T	
	T	T	T	T	T	P
				C	C	
	C	C	C	P	P	P
				P	P	
JUNE 3,1982:						
FINAL EFFLUENT	--	--	--	--	--	--
MILL INTAKE WATER	ND	ND	ND	ND	ND	ND
JUNE 16,1982:						
FINAL EFFLUENT	ND	ND	ND	ND	ND	ND
MILL INTAKE WATER	ND	ND	250	ND	ND	ND
JULY 21,1982:						
FINAL EFFLUENT	ND	ND	ND	ND	200	ND
MILL INTAKE WATER	--	--	--	--	--	--
JULY 22,1982:						
FINAL EFFLUENT	ND	ND	ND	ND	ND	ND
JULY 23,1982:						
FINAL EFFLUENT	ND	ND	ND	ND	ND	100
DETECTION LIMIT	100	50	50	50	50	50

ND -NOT DETECTED
-- -NOT AVAILABLE
TCP-TRICHLOROPHENOL
TTCP-TETRACHLOROPHENOL
PCP-PENTACHLOROPHENOL

TABLE:49 CHLOROPHENOL CONCENTRATIONS IN BOISE CASCADE CANADA LIMITED,
FORT FRANCES, EFFLUENTS AND MILL INTAKE WATER.

CONCENTRATIONS (NG/L = PPT) OF CHLOROPHENOLS						
DATE SAMPLED/ SAMPLE DESCRIPTION	2	2	2	2	2	
	3	4	4	4	5	
	5	6	6	6	6	
	-	-	-	-	-	
	T	T	T	T	T	P
	C	C	C	C	C	C
	P	P	P	P	P	P
JULY 13, 1982:						
FINAL EFFLUENT	4200	ND	2000	ND	1000	1000
SECONDARY LAGOON INFLUENT	2200	ND	2000	ND	1400	1000
SECONDARY LAGOON EFFLUENT	5100	ND	1000	ND	1500	1100
MILL INTAKE WATER	ND	ND	ND	ND	ND	ND
DETECTION LIMIT	100	50	50	50	50	50
ND -NOT DETECTED TCP-TRICHLOROPHENOL TTCP-TETRACHLOROPHENOL PCP-PENTACHLOROPHENOL						

TABLE:50 CHLOROPHENOL CONCENTRATIONS IN DOMTAR PACKAGING/KRAFT PAPER,
AND BOARD DIVISION RED ROCK MILL, EFFLUENTS AND MILL INTAKE WATER.

CONCENTRATIONS (NG/L = PPT) OF CHLOROPHENOLS						
DATE SAMPLED/ SAMPLE DESCRIPTION				2	2	
				,	,	
	2	2	2	3	3	
	,	,	,	4	5	
	3	4	4	,	,	
	,	,	,	5	6	
	4	5	6	-	-	
	-	-	-	T	T	
	T	T	T	T	T	P
	C	C	C	C	C	C
	P	P	P	P	P	P
JUNE 14,1982:						
FINAL EFFLUENT *	ND	ND	2100	ND	ND	100
MILL INTAKE WATER	ND	ND	ND	ND	ND	ND
JULY 5,1982:						
WOODROOM EFFLUENT:						
ALUM UNTREATED	ND	ND	ND	ND	ND	250
ALUM TREATED	ND	ND	ND	ND	ND	100
MILL INTAKE WATER	ND	ND	ND	ND	ND	ND
JULY 17,1983:						
FINAL EFFLUENT *	ND	ND	6600	ND	ND	760
MILL INTAKE WATER	ND	ND	5100	ND	ND	ND
JULY 18,1983:						
FINAL EFFLUENT *	ND	ND	1250	ND	ND	ND
MILL INTAKE WATER	ND	ND	ND	ND	ND	ND
JULY 19,1983:						
FINAL EFFLUENT *	ND	ND	200	ND	ND	ND
MILL INTAKE WATER	ND	ND	ND	ND	ND	ND
JULY 20,1983:						
FINAL EFFLUENT *	ND	ND	300	ND	ND	ND
MILL INTAKE WATER	ND	ND	ND	ND	ND	ND
JULY 21,1983:						
FINAL EFFLUENT *	ND	ND	1300	ND	ND	ND
MILL INTAKE WATER	ND	ND	ND	ND	ND	ND
DETECTION LIMIT	100	50	50	50	50	50

ND -NOT DETECTED
TCP-TRICHLOROPHENOL
TTCP-TETRACHLOROPHENOL
PCP-PENTACHLOROPHENOL

* NOTE: Mill effluent samples from Domtar Packaging also contained
effluent from the Red Rock Water Pollution Control Plant

TABLE:52 CHLOROPHENOL CONCENTRATIONS IN GREAT LAKES FOREST PRODUCTS LIMITED,
THUNDER BAY, EFFLUENT AND MILL INTAKE WATER.

CONCENTRATIONS (NG/L = PPT) OF CHLOROPHENOLS						
DATE SAMPLED/ SAMPLE DESCRIPTION				2	2	
	2	2	2	3	3	
	3	4	4	4	5	
	4	5	6	5	6	
	-	-	-	-	-	
	T	T	T	T	T	P
	C	C	C	C	C	C
	P	P	P	P	P	P
JULY 8,1982:						
FINAL EFFLUENT	600	ND	450	ND	150	ND
MILL INTAKE WATER	ND	ND	ND	ND	ND	ND
DETECTION LIMIT	100	50	50	50	50	50

ND -NOT DETECTED
TCP-TRICHLOROPHENOL
TTCP-TETRACHLOROPHENOL
PCP-PENTACHLOROPHENOL

TABLE:53 CHLOROPHENOL CONCENTRATIONS IN JAMES RIVER MARATHON LTD.,
(FORMERLY: AMERICAN CAN CANADA INC.) MARATHON, EFFLUENTS AND MILL INTAKE WATER.

CONCENTRATIONS (NG/L = PPT) OF CHLOROPHENOLS						
DATE SAMPLED/ SAMPLE DESCRIPTION				2	2	
	2	2	2	3	3	
	3	4	4	4	5	
	4	5	6	5	6	
	-	-	-	-	-	
	T	T	T	T	T	P
	C	C	C	C	C	C
	P	P	P	P	P	P
JUNE 22,1982:						
FINAL EFFLUENT	3800	ND	3200	ND	800	350
MAIN MILL EFFLUENT	ND	ND	ND	ND	ND	ND
ACIDIC SEWER						
EFFLUENT	12400	ND	15300	ND	4600	ND
ALKALINE SEWER						
EFFLUENT	ND	ND	ND	ND	ND	ND
MILL INTAKE WATER	ND	ND	ND	ND	ND	ND
AUGUST 16,1982:						
FINAL EFFLUENT	7450	ND	320	ND	420	ND
MILL INTAKE WATER	ND	ND	ND	ND	ND	ND
DETECTION LIMIT	100	50	50	50	50	50

ND -NOT DETECTED
TCP-TRICHLOROPHENOL
TTCP-TETRACHLOROPHENOL
PCP-PENTACHLOROPHENOL

TABLE:54 CHLOROPHENOL CONCENTRATIONS IN KIMBERLY-CLARK OF CANADA LIMITED,
TERRACE BAY, EFFLUENTS AND MILL INTAKE WATER.

CONCENTRATIONS (NG/L = PPT) OF CHLOROPHENOLS						
DATE SAMPLED/ SAMPLE DESCRIPTION	2	2	2	2	2	P
				3	3	
	2	2	2	4	5	P
				4	5	
	3	4	4	5	6	P
				5	6	
	4	5	6	-	-	P
				T	T	
	T	T	T	T	T	P
				C	C	
	C	C	C	P	P	P
				P	P	
AUGUST 10,1982:						
FINAL EFFLUENT	3800	ND	2600	ND	1600	2200
MILL INTAKE WATER	ND	ND	ND	ND	ND	ND
JULY 10,1983:						
FINAL EFFLUENT	ND	50	11600	ND	ND	870
MILL INTAKE WATER	ND	ND	ND	ND	ND	ND
JULY 11,1983:						
FINAL EFFLUENT	ND	ND	16200	200	ND	2250
MILL INTAKE WATER	ND	ND	ND	ND	ND	ND
JULY 12,1983:						
FINAL EFFLUENT	ND	ND	7800	ND	ND	820
MILL INTAKE WATER	ND	ND	ND	ND	ND	ND
JULY 13,1983:						
FINAL EFFLUENT	--	--	--	--	--	--
MILL INTAKE WATER	--	--	--	--	--	--
JULY 14,1983:						
FINAL EFFLUENT	ND	ND	11000	ND	ND	1100
MILL INTAKE WATER	ND	ND	ND	ND	ND	ND
DETECTION LIMIT	100	50	50	50	50	50

ND -NOT DETECTED
TCP-TRICHLOROPHENOL
TTCP-TETRACHLOROPHENOL
PCP-PENTACHLOROPHENOL

TABLE:55 ORGANOHALIDES IN ABITIBI PRICE FINE PAPERS,
PORT ARTHUR DIVISION, EFFLUENTS.

CONCENTRATIONS (UG/L = PPB) OF ORGANOHALIDES						
DATE SAMPLED/ SAMPLE DESCRIPTION	CHLOROFORM	CATABORACHLORIDE	TRICHTHLYOLREONE	DIBROMOOLTHANE	CHLOROBROMOMETHANE	TETRAETHYLOREONE
JULY 7,1982: GROUNDWOOD EFFLUENT	ND	ND	ND	ND	ND	ND
PAPER MILL EFFLUENT	ND	ND	ND	ND	ND	ND
AUGUST 4,1982: FINAL EFFLUENT	20	ND	ND	ND	ND	ND
DETECTION LIMIT	1.0	0.1	2.0	0.5	1.0	0.5
ND -NOT DETECTED						

TABLE:56 ORGANOHALIDES IN ABITIBI PRICE INC.,
FORT WILLIAM DIVISION, EFFLUENTS.

CONCENTRATIONS (UG/L = PPB) OF ORGANOHALIDES						
DATE SAMPLED/ SAMPLE DESCRIPTION	CHLOROFORM	CATREBTORNA CHLOROFORM E	TRIETHYL OL RE -E	DIBCHOLM OO RM OE -T H A N E	CHLID OBR OOR -M O M E T H A N E	TE TR AE CT HH LY OL RE ON -E
JULY 21,1982:						
COMBINED FINAL EFFLUENT*	11	ND	ND	ND	ND	ND
FINAL EFFLUENT**	13	ND	ND	ND	ND	ND
WOODROOM EFFLUENT	9	ND	ND	ND	ND	ND
SCMP EFFLUENT	19	ND	ND	ND	ND	ND
DETECTION LIMIT	1.0	0.1	2.0	0.5	1.0	0.5

ND -NOT DETECTED
* -NO.1 & NO.2 LAGOON EFFLUENTS & WOODROOM EFFLUENT
** -NO.1 & NO.2 LAGOON EFFLUENTS
SCMP-SEMI CHEMICAL MECHANICAL PULPING

TABLE:57 ORGANOHALIDES IN ABITIBI PRICE INC.,
THUNDER BAY DIVISION, EFFLUENTS AND MILL INTAKE WATER.

CONCENTRATIONS (UG/L = PPB) OF ORGANOHALIDES						
DATE SAMPLED/ SAMPLE DESCRIPTION	CHLOROFORM	CATREBTORANACHLORIDE	TRIETHYLOLREONE	DIBCHROMOLMOETHANENE	CHDLIOBRROOMOMETHANENE	TETRAETHYLOLREONE
JUNE 3,1982: FINAL EFFLUENT	ND	ND	ND	ND	ND	ND
JUNE 16,1982: FINAL EFFLUENT	ND	ND	ND	ND	ND	ND
JULY 21,1982: FINAL EFFLUENT	ND	ND	ND	ND	ND	ND
MILL INTAKE WATER	ND	ND	ND	ND	ND	ND
JULY 22,1982: FINAL EFFLUENT	ND	ND	ND	ND	ND	ND
JULY 23,1982: FINAL EFFLUENT	ND	ND	ND	ND	ND	ND
DETECTION LIMIT	1.0	0.1	2.0	0.5	1.0	0.5
ND -NOT DETECTED						

TABLE:58 ORGANOHALIDES IN BOISE CASCADE CANADA LIMITED,
FORT FRANCES, EFFLUENTS.

CONCENTRATIONS (UG/L = PPB) OF ORGANOHALIDES						
DATE SAMPLED/ SAMPLE DESCRIPTION	CHLOROFORM	CATREBTORNA CHLORIDE	TRIETHYL OL REONE	DI B CR HO LM OO RM OE - T H A N E	CHD LI OB RR OO - M O M E T H A N E	TE TR AE CT HH LY OL RE ON - E
JULY 13,1982: FINAL EFFLUENT	500	ND	ND	ND	ND	ND
SECONDARY LAGOON INFLUENT	ND	ND	ND	ND	ND	ND
SECONDARY LAGOON EFFLUENT	ND	ND	ND	ND	ND	ND
DETECTION LIMIT	1.0	0.1	2.0	0.5	1.0	0.5
ND -NOT DETECTED						

TABLE:59 ORGANOHALIDES IN DOMTAR PACKAGING/KRAFT PAPER AND BOARD
DIVISION RED ROCK MILL, EFFLUENTS.

CONCENTRATIONS (UG/L = PPB) OF ORGANOHALIDES						
DATE SAMPLED/ SAMPLE DESCRIPTION	CHLOROFORM	CATREBORNA CHLORIDE	TRIECTHLY OLREONE	DICRHOOLM OETHANE	CHLOROBROMO METHANE	TETRAETHYLO REONE
JUNE 14,1982: FINAL EFFLUENT*	--	--	--	--	--	--
JULY 5,1982: WOODROOM EFFLUENT:						
ALUM UNTREATED	ND	ND	ND	ND	ND	ND
ALUM TREATED	ND	ND	ND	ND	ND	ND
DETECTION LIMIT	1.0	0.1	2.0	0.5	1.0	0.5
ND -NOT DETECTED						
-- -NOT AVAILABLE						

* NOTE: Mill effluent samples from Domtar Packaging also contained
effluent from the Red Rock Water Pollution Control Plant

TABLE:60 ORGANOHALIDES IN GREAT LAKES FOREST PRODUCTS LIMITED,
 DRYDEN, EFFLUENT.

CONCENTRATIONS (UG/L = PPB) OF ORGANOHALIDES						
DATE SAMPLED/ SAMPLE DESCRIPTION	CHLOROFORM	CATREBTORANACHLORIDE	TRIETHYLYLOLEONE	DIBROMOCHLOROMETHANE	CHLOROBROMOMETHANE	TETRACHYLOLEONE
AUGUST 23,1982: FINAL EFFLUENT	1639	ND	ND	ND	ND	10
DETECTION LIMIT	1.0	0.1	2.0	0.5	1.0	0.5
ND -NOT DETECTED						

TABLE:61 ORGANOHALIDES IN GREAT LAKES FOREST PRODUCTS LIMITED,
THUNDER BAY, EFFLUENT.

CONCENTRATIONS (UG/L = PPB) OF ORGANOHALIDES						
DATE SAMPLED/ SAMPLE DESCRIPTION	CHLOROFORM	CATREBTOR NACHLORIDE	TRIETHYLOLREONE	DIBROMOOLMOETHANE	CHLOROBROMOMETHANE	TETRAETHYLOREONE
JUNE 8,1982: FINAL EFFLUENT	4036	ND	ND	9	ND	ND
DETECTION LIMIT	1.0	0.1	2.0	0.5	1.0	0.5
ND -NOT DETECTED						

TABLE:62 ORGANOHALIDES IN JAMES RIVER MARATHON LTD.,
(FORMERLY: AMERICAN CAN CANADA INC.), EFFLUENTS.

CONCENTRATIONS (UG/L = PPB) OF ORGANOHALIDES						
DATE SAMPLED/ SAMPLE DESCRIPTION	CHLOROFORM	CATREBTORNA CHLORIDE	TRIETHYLOL REONE	DIBROMOCHLORMETHANE	CHLOROBROMOMETHANE	TEST TREA CTHH LYOL REON -E
JUNE 22,1982:						
FINAL EFFLUENT	8	ND	ND	ND	ND	ND
MAIN MILL EFFLUENT	ND	ND	ND	ND	ND	ND
ACIDIC SEWER EFFLUENT	3	ND	ND	ND	ND	ND
ALKALINE SEWER EFFLUENT	4	ND	ND	ND	ND	ND
AUGUST 16,1982:						
FINAL EFFLUENT	504	ND	ND	ND	ND	ND
DETECTION LIMIT	1.0	0.1	2.0	0.5	1.0	0.5
ND -NOT DETECTED						

TABLE:63 ORGANOHALIDES IN KIMBERLY-CLARK OF CANADA LIMITED,
TERRACE BAY, EFFLUENT.

CONCENTRATIONS (UG/L = PPB) OF ORGANOHALIDES						
DATE SAMPLED/ SAMPLE DESCRIPTION	CHLOROFORM	CARBON TETRACHLORIDE	TRICHLOROETHYLENE	DIBROMOETHYLENE	CHLOROBROMOETHYLENE	TRICHLOROETHYLENE
AUGUST 10, 1982: FINAL EFFLUENT	613	ND	ND	ND	ND	ND
DETECTION LIMIT	1.0	0.1	2.0	0.5	1.0	0.5
ND -NOT DETECTED						

TABLE:65 POLYCHLORINATED BIPHENYLS (PCB'S) AND ORGANOCHLORINE PESTICIDES
IN ABITIBI PRICE INC., FORT WILLIAM DIVISION, EFFLUENTS AND MILL INTAKE WATER.

CONCENTRATIONS (NG/L = PPT) OF PCB'S AND ORGANOCHLORINE PESTICIDES																									
DATE SAMPLED/ SAMPLE DESCRIPTION	P C B ' S	A L D R I N	A L P H A - B H C	B E T A - B H C	G A M M A - B H C	A L P H A - C H L O R D A N E	G A M M A - C H L O R D A N E	D I E L D R I N	D M D T - M E T H O X Y C H L O R	E N D O S U L P H A N 1	E N D O S U L P H A N 2	E N D O S U L P H A N I N	E N D O S U L P H A N E	H E P T A C H L O R E P O X I D E	H E P T A C H L O R M I R R E X	O X Y C H L O R D A N E	O P - D D T	P P - D D D	P P - D D E	P P - D D T	H E X A C H L O R O B E N Z E N E				
JULY 21,1982: COMBINED FINAL EFFLUENT*	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	
FINAL EFFLUENT**	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	
WOODROOM EFFLUENT	ND	ND	5	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	
SCMP EFFLUENT	ND	ND	5	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	
MILL INTAKE WATER	ND	ND	5	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	
DETECTION LIMIT	20	1	1	1	1	2	2	2	5	2	4	4	4	4	1	1	5	2	5	5	1	5	1		
ND -NOT DETECTED																									
* -NO.1 & NO.2 LAGOON EFFLUENTS AND WOODROOM EFFLUENT (* -NO.1 & NO.2 LAGOON EFFLUENTS																									
SCMP-SEMI CHEMICAL MECHANICAL PULPING																									

TABLE:66 POLYCHLORINATED BIPHENYLS (PCB'S) AND ORGANOCHLORINE PESTICIDES
IN ABITIBI PRICE INC., THUNDER BAY DIVISION, EFFLUENTS AND MILL INTAKE WATER.

CONCENTRATIONS (NG/L = PPT) OF PCB'S AND ORGANOCHLORINE PESTICIDES																						
DATE SAMPLED/ SAMPLE DESCRIPTION	PCB'S T O L A I N	A L P D R B H I C	A L P H A - B B H C C C	B E T A - B B H C C C	G A M M A - B B H C C C	A L P H A - C H L O R R D A N E E	G A M M A - C H L O R R D A N E E	D I E L C H R I O	D M D T - M E T H O X Y C H L O R	E N D O S U L P H A N	E N D O S U L P H A N	E N D O S U L P H A N	E N D O S U L P H A N	E N D O S U L P H A N	H E P T A C H L O R	H E P T A C H L O R	O X Y C H L O R R D A N E	O P - D D T	P P - D D D	P P - D D D	P P - D D T	H E X A C H L O R O B E N Z E N E
JUNE 3,1982: FINAL EFFLUENT MILL INTAKE WATER	ND	ND	6	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
JUNE 16,1982: FINAL EFFLUENT MILL INTAKE WATER	ND	ND	2	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
JULY 21,1982: FINAL EFFLUENT MILL INTAKE WATER	ND	ND	6	ND	1	ND	3	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
JULY 22,1982: FINAL EFFLUENT	ND	ND	5	1	9	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
JULY 23,1982: FINAL EFFLUENT	ND	ND	2	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
DETECTION LIMIT	20	1	1	1	1	2	2	2	5	2	4	4	4	1	1	5	2	5	5	1	5	1
ND -NOT DETECTED -- -NOT AVAILABLE																						

ND -NOT DETECTED
-- -NOT AVAILABLE

TABLE:67 POLYCHLORINATED BIPHENYLS (PCB'S) AND ORGANOCHLORINE PESTICIDES
IN BOISE CASCADE CANADA LIMITED, FORT FRANCES, EFFLUENTS AND MILL INTAKE WATER.

CONCENTRATIONS (NG/L = PPT) OF PCB'S AND ORGANOCHLORINE PESTICIDES																							
DATE SAMPLED/ SAMPLE DESCRIPTION	PCB'S											ENDOSULPHAN		HEPTACHLOR		OXYCHLOR						HEXACHLOROBENZENE	
		ALDRI	ALPHA-BHC	BETA-BHC	GAMMA-BHC	ALPHA-CHLORD	GAMMA-CHLORD	DELTA-CHLORD	DDT-CHLORD	ENDOSULPHAN 1	ENDOSULPHAN 2	ENDOSULPHAN	ENDOSULPHAN	HEPTACHLOR	HEPTACHLOR	MIREX	OXID	PPD	PPD	PPD	PPD	PPD	
JULY 13,1982: FINAL EFFLUENT SECONDARY LAGOON INFLUENT SECONDARY LAGOON EFFLUENT MILL INTAKE WATER		ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND		
		ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND		
		ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND		
		ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND		
DETECTION LIMIT		20	1	1	1	1	2	2	2	5	2	4	4	4	1	1	5	2	5	5	1	5	
ND -NOT DETECTED																							

TABLE:68 POLYCHLORINATED BIPHENYLS (PCB'S) AND ORGANOCHLORINE PESTICIDES IN DOMTAR PACKAGING/KRAFT PAPER AND BOARD DIVISION RED ROCK MILL, EFFLUENTS AND MILL INTAKE WATER.

		CONCENTRATIONS (NG/L = PPT) OF PCB'S AND ORGANOCHLORINE PESTICIDES																			
DATE SAMPLED/ SAMPLE DESCRIPTION	PCB'S	A L P H A - C H L O R I N E				G A M M A - C H L O R I N E				D M D T - M E T H O X Y C H L O R I N E				E N D O S U L P H A N				H E P T A C H L O R E			
		A L P H A - C H L O R I N E	B E T A - C H L O R I N E	G A M M A - C H L O R I N E	D M D T - M E T H O X Y C H L O R I N E	E N D O S U L P H A N	E N D O S U L P H A N	E N D O S U L P H A N	E N D O S U L P H A N	E N D O S U L P H A N	E N D O S U L P H A N	E N D O S U L P H A N	E N D O S U L P H A N	E N D O S U L P H A N	E N D O S U L P H A N	E N D O S U L P H A N	E N D O S U L P H A N	E N D O S U L P H A N	E N D O S U L P H A N	E N D O S U L P H A N	E N D O S U L P H A N
JUNE 14,1982: FINAL EFFLUENT * MILL INTAKE WATER	ND ND	ND ND	24 5	24 ND	28 ND	ND ND	ND ND	ND ND	ND ND	ND ND	ND ND	ND ND	ND ND	ND ND	ND ND	ND ND	ND ND	ND ND	ND ND	ND ND	ND ND
JULY 5,1982: WOODROOM EFFLUENT: ALUM UNTREATED ALUM TREATED MILL INTAKE WATER	235 970 ND	2 ND ND	18 11 14	26 11 ND	5 ND ND	ND ND ND	ND ND ND	ND ND ND	ND ND ND	ND ND ND	ND ND ND	ND ND ND	ND ND ND	ND ND ND	ND ND ND	ND ND ND	ND ND ND	ND ND ND	ND ND ND	ND ND ND	ND ND ND
JULY 17,1983: FINAL EFFLUENT * MILL INTAKE WATER	35 ND	ND ND	ND 1	ND ND	ND ND	ND 6	ND 2	ND ND	ND ND	ND ND	ND ND	ND ND	ND ND	ND ND	ND ND	ND ND	ND ND	ND ND	ND ND	2 ND	ND ND
JULY 18,1983: FINAL EFFLUENT * MILL INTAKE WATER	65 ND	ND ND	2 5	ND ND	ND ND	ND ND	ND ND	ND ND	ND ND	ND ND	ND ND	ND ND	ND ND	ND ND	ND ND	ND ND	ND ND	ND ND	ND ND	1 ND	ND ND
JULY 19,1983: FINAL EFFLUENT * MILL INTAKE WATER	ND ND	ND ND	9 4	ND ND	3 ND	ND ND	ND ND	ND ND	ND ND	ND ND	ND ND	ND ND	ND ND	ND ND	ND ND	ND ND	ND ND	ND ND	ND ND	1 ND	ND ND
JULY 20,1983: FINAL EFFLUENT * MILL INTAKE WATER	ND ND	ND ND	3 5	ND ND	ND ND	ND ND	ND ND	ND ND	ND ND	ND ND	ND ND	ND ND	ND ND	ND ND	ND ND	ND ND	ND ND	ND ND	ND ND	ND ND	ND ND
JULY 21,1983: FINAL EFFLUENT * MILL INTAKE WATER	ND ND	ND ND	3 2	ND ND	ND ND	ND ND	ND ND	ND ND	ND ND	ND ND	ND ND	ND ND	ND ND	ND ND	ND ND	ND ND	ND ND	ND ND	ND ND	ND ND	ND ND
DETECTION LIMIT	20	1	1	1	1	2	2	2	5	2	4	4	4	1	1	5	2	5	5	1	1

ND -NOT DETECTED
-- -NOT AVAILABLE

* NOTE: Mill effluent samples from Domtar Packaging also contained effluent from the Red Rock Water Pollution Control Plant

TABLE:69 POLYCHLORINATED BIPHENYLS (PCB'S) AND ORGANOCHLORINE PESTICIDES IN GREAT LAKES FOREST PRODUCTS LIMITED, DRYDEN, EFFLUENT AND MILL INTAKE WATER.

CONCENTRATIONS (NG/L = PPT) OF PCB'S AND ORGANOCHLORINE PESTICIDES																					
DATE SAMPLED/ SAMPLE DESCRIPTION	PCB'S TOTAL	ALDRIN	ALPHA-BHC	BETA-BHC	GAMMA-BHC	ALPHA-CHLORDANE	GAMMA-CHLORDANE	DELDRIN	DDT-METHOXYCHLOR	ENDOSULPHAN 1	ENDOSULPHAN 2	ENDOSULPHAN	HEPTACHLOR	HEPTACHLOR EPOXIDE	MIREX	OXYCHLORDANE	OP-DDT	PP-DDD	PP-DDE	PP-DDT	HEXACHLOROBENZENE
AUGUST 23, 1982: FINAL EFFLUENT MILL INTAKE WATER	65 30	ND ND	4 12	ND ND	ND 2	ND ND	ND ND	ND ND	ND ND	ND ND	ND ND	ND ND	ND ND	ND ND	ND ND	ND ND	ND ND	ND ND	ND ND	ND ND	ND ND
DETECTION LIMIT	20	1	1	1	1	2	2	2	5	2	4	4	4	1	1	5	2	5	5	1	5
ND -NOT DETECTED																					

TABLE:70 POLYCHLORINATED BIPHENYLS (PCB'S) AND ORGANOCHLORINE PESTICIDES IN GREAT LAKES FOREST PRODUCTS LIMITED, THUNDER BAY, EFFLUENT AND MILL INTAKE WATER.

CONCENTRATIONS (NG/L = PPT) OF PCB'S AND ORGANOCHLORINE PESTICIDES																							
DATE SAMPLED/ SAMPLE DESCRIPTION	PCB'S TOTAL ALIN	ALPHA-BHC	BETA-BHC	GAMMA-BHC	ALPHA-CHLORODANE	GAMMA-CHLORODANE	DIELDRIN	DMDT-METHOXYCHLOR	ENDOSULPHAN 1	ENDOSULPHAN 2	ENDRIN	ENDOSULPHAN TEE	HEPTACHLOR	HEPTACHLOR X	OXYCHLORODANE	OP-DDT	PP-DDD	PP-DDE	PP-DDT	HEXACHLOROBENZENE			
JUNE 8, 1982: FINAL EFFLUENT MILL INTAKE WATER	ND ND	ND ND	3 ND	ND ND	ND ND	ND ND	ND ND	ND ND	ND ND	ND ND	ND ND	ND ND	ND ND	ND ND	ND ND	ND ND	ND ND	ND ND	ND ND	ND ND	ND ND		
DETECTION LIMIT	20	1	1	1	1	2	2	2	5	2	4	4	4	1	1	5	2	5	5	1	5	1	
ND -NOT DETECTED																							

TABLE:71 POLYCHLORINATED BIPHENYLS (PCB'S) AND ORGANOCHLORINE PESTICIDES IN
JAMES RIVER MARATHON LTD., (FORMERLY AMERICAN CAN CANADA INC.), EFFLUENTS AND MILL INTAKE WATER.

CONCENTRATIONS (NG/L = PPT) OF PCB'S AND ORGANOCHLORINE PESTICIDES																					
DATE SAMPLED/ SAMPLE DESCRIPTION	PCB'S TOTAL AL	ALPHA		BETA		GAMMA		DELTA		E		F		G		H		I		J	
		PCB'S	ALPHA	BETA	GAMMA	DELTA	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S
JUNE 22, 1982:																					
FINAL EFFLUENT	2210	ND	6	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
MAIN MILL EFFLUENT	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
ACIDIC SEWER																					
EFFLUENT	ND	ND	5	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	2
ALKALINE SEWER																					
EFFLUENT	90	ND	11	ND	7	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	22
MILL INTAKE WATER	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
AUGUST 16, 1982:																					
FINAL EFFLUENT	ND	ND	3	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
MILL INTAKE WATER	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
DETECTION LIMIT	20	1	1	1	1	2	2	2	5	2	4	4	4	1	1	5	2	5	5	1	5
ND -NOT DETECTED																					

- 131 -

CONCENTRATIONS (NG/L = PPT) OF PCB'S AND ORGANOCHLORINE PESTICIDES																						
DATE SAMPLED/ SAMPLE DESCRIPTION	PCB'S TOTAL	ALDRIN	ALPHA-BHC	BETA-BHC	GAMMA-BHC	ALPHA-CHLORDANE	GAMMA-CHLORDANE	DIELDRIN	DDT-METHOXYCHLOR	ENDOSULPHAN 1	ENDOSULPHAN 2	ENDRIN	ENDOSULPHAN	HEPTACHLOR EPOXIDE	HEPTACHLOR	MIREX	OXYCHLORDANE	OP-DDT	PP-DDD	PP-DDE	PP-DDT	HEXACHLOROBENZENE
AUGUST 10,1982: FINAL EFFLUENT MILL INTAKE WATER	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND	ND
DETECTION LIMIT	20	1	1	1	1	2	2	2	5	2	4	4	4	1	1	5	2	5	5	1	5	1
ND -NOT DETECTED -- -NOT AVAILABLE																						

APPENDIX C

Table 1: Preliminary List of Trace Contaminants of Concern which should be included for Monitoring Pulp and Paper Mill Effluents in Ontario*

CONTAMINANTS	CONCERN
Aluminum	criteria in development, high in waste metals
Benzene	moderately toxic(a), low bioaccumulation(b), non-persistent(c), animal and suspect human carcinogen
Bromodichloromethane	mutagen
Cadmium	extremely toxic, moderately bioaccumulative
Carbon Tetrachloride	slightly toxic, non-persistent, animal and suspect human carcinogen
Chloroacetaldehyde	mutagen
Chlorodehydroabiatic Acids	toxic, persistent
Chloroform	slightly toxic, non-persistent, animal and suspect human carcinogen
Chlorofuranone	mutagen
Chloropropenal	mutagen
Copper	regulated
Dehydroabiatic Acid	toxic, persistent
Dibutyl Phthalate	human health
Dichloroacetone	mutagen
Dichloroethane	slightly toxic, non-persistent, animal carcinogen
Dichloromethane	mutagen
Fatty Acids	toxic
Hexachloroacetone	mutagen
Lead	extremely toxic
Mercury	extremely toxic, highly bioaccumulative
Neoabiatic Acid	mutagen
Pentachloroacetone	mutagen
Pentachlorophenol	extremely toxic, very persistent
Pentachloropropene	mutagen
Phenols	toxic, impair flavour
PCBs	high bioaccumulation, very persistent
PCDDs	animal carcinogens
PCDFs	potential animal carcinogens
Resin Acids	toxic
2,3,7,8-TCDD	animal carcinogen & teratogen
Tetrachloroacetone	mutagen
Tetrachloroethene	mutagen
Tetrachloroguaiacol	toxic, persistent
Tetrachloropropene	mutagen
Toluene	moderately toxic, non-persistent, cancer promoter
Trichloroacetone	mutagen
Trichloroethane	moderately toxic, non-persistent, 1,1,1-isomer: mutagen; 1,1,2-isomer: carcinogen
Trichloroethene	mutagen
Trichloroguaiacol	toxic, persistent
Trichlorophenol	extremely toxic, persistent, 2,4,6-isomer: possible animal carcinogen
Zinc	regulated

* = prepared by Cecil Inniss, MOE (unpublished)

(a) = toxic to aquatic biota

(b) = bioaccumulates in aquatic biota

(c) = persistent in the aquatic environment

PCBs = Polychlorinated biphenyls

PCDDs = Polychlorinated dibenzodioxins

PCDFs = Polychlorinated dibenzofurans

TCDD = Tetrachlorodibenzodioxin

APPENDIX D

ABBREVIATIONS & SYMBOLS:

A	Approximately
ACGIH	American Conference of Governmental Industrial Hygienists
APFP	Abitibi Price Fine Papers, Port Arthur Division
APFW	Abitibi Price Inc., Fort William Division
APTB	Abitibi Price Inc., Thunder Bay Division
BAT	Best Available Technology Economically Achievable
BHC	Hexachlorocyclohexane
BOD	Biological Oxygen Demand
BOISE	Boise Cascade Canada Ltd.
COA	Canada - Ontario Agreement Respecting Great Lakes Water Quality
COD	Chemical Oxygen Demand
CP	Chlorophenols
CPAR	Committee on Pollution Abatement Research
DCP	Dichlorophenols
DOC	Dissolved Organic Carbon
DOMTAR	Domtar Packaging/Kraft Paper and Board Division, Red Rock Mill
<u>E. coli</u>	<u>Escherichia coli</u>
FTU	Formazin Turbidity Units
GC/MS	Gas Chromatography/Mass Spectrometry
GLFP	Great Lakes Forest Products Ltd., (Dryden)
GLFPTB	Great Lakes Forest Products Ltd., (Thunder Bay)
GLWQA	Great Lakes Water Quality Agreement
HZ	Hazen Units
IJC	International Joint Commission
JR	James River Marathon Ltd.
KC	Kimberly-Clark of Canada Ltd.
LC50	Lethal Concentration 50
MOE	Ontario Ministry of the Environment
mg/L	Milligrams/Litre
mL	Millilitres
N	Number of Samples
NA	Not Available

ABBREVIATIONS & SYMBOLS: (Cont'd)

ND	Not Detected
NL	Non Lethal
ng/L	Nanograms/Litre
P & P	Pulp and Paper
PCB	Polychlorinated biphenyls
PCDD	Polychlorinated dibenzodioxins
PCDF	Polychlorinated dibenzofurans
PCP	Pentachlorophenols
PPB	Parts Per Billion
PPM	Parts Per Million
PPT	Parts Per Trillion
PWQO	Provincial Water Quality Objective
SCMP	Semi Chemical Mechanical Pulping
SU	Standard Units
TCDD	Tetrachlorodibenzodioxin
TCP	Trichlorophenols
TKN	Total Kjeldahl Nitrogen
TP	Total Phosphorus
TS	Total Solids
TSS	Total Suspended Solids
TTCP	Tetrachlorophenols
USDHHS	United States Department of Health and Human Services
USEPA	United States Environmental Protection Agency
µg/L	Micrograms/Litre
µs/cm	Microsiemens/Centimetre
--	Not Available
<	Less Than
>	Greater Than
%	Percent